




OIL ANALYSIS REPORT

Sample Rating Trend

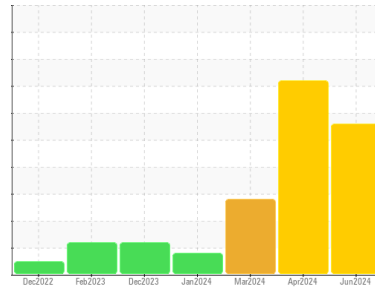

Machine Id
228062-670443

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We advise that you check the air filter, air induction system, and any areas where dirt may enter the component. We recommend an early resample to monitor this condition.

Wear

Piston and cylinder wear is indicated.

Contamination

Sodium and/or potassium levels are high. Elemental levels of silicon (Si) and aluminum (Al) indicate alumina-silicate (coarse dirt) ingress.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0118467	GFL0118492	GFL0104986
Sample Date	Client Info			04 Jun 2024	04 Apr 2024	04 Mar 2024
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			Not Changed	Not Changed	Changed
Sample Status				ABNORMAL	SEVERE	SEVERE

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	▲ 3.3	▲ 23.8	
Water	WC Method	>0.2	NEG	NEG	NEG	

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	▲ 127	▲ 168	16
Chromium	ppm	ASTM D5185m	>20	10	13	0
Nickel	ppm	ASTM D5185m	>2	2	4	0
Titanium	ppm	ASTM D5185m	>2	1	1	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>25	● 39	● 27	4
Lead	ppm	ASTM D5185m	>40	<1	<1	2
Copper	ppm	ASTM D5185m	>330	7	6	<1
Tin	ppm	ASTM D5185m	>15	1	<1	1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	4	0	2
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	77	66	42
Manganese	ppm	ASTM D5185m	0	2	2	0
Magnesium	ppm	ASTM D5185m	1010	944	921	710
Calcium	ppm	ASTM D5185m	1070	1125	1101	802
Phosphorus	ppm	ASTM D5185m	1150	1025	935	747
Zinc	ppm	ASTM D5185m	1270	1203	1118	913
Sulfur	ppm	ASTM D5185m	2060	2878	3080	2186






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	▲ 62	▲ 84	4
Sodium	ppm	ASTM D5185m		▲ 70	36	<1
Potassium	ppm	ASTM D5185m	>20	▲ 102	37	0
Glycol	%	*ASTM D2982		NEG	NEG	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.9	0.5	0.2
Nitration	Abs/cm	*ASTM D7624	>20	11.2	12.4	9.0
Sulfation	Abs.1mm	*ASTM D7415	>30	22.6	22.6	19.0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs.1mm	*ASTM D7414	>25	19.0	21.6	17.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.6	7.0	6.7







OIL ANALYSIS REPORT

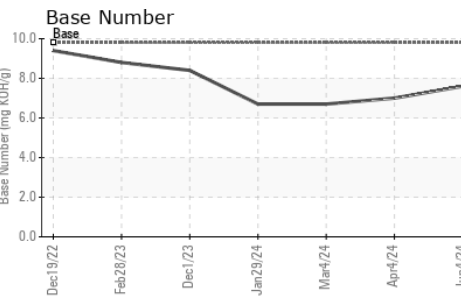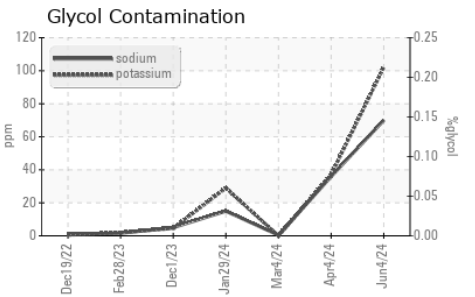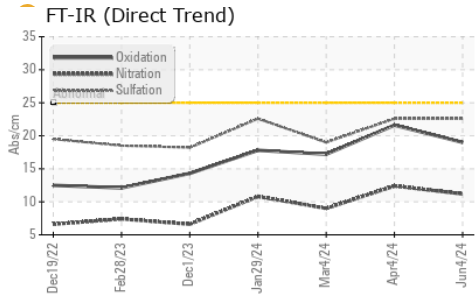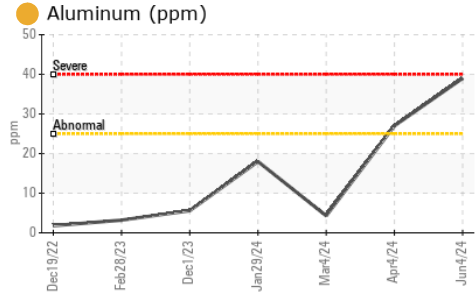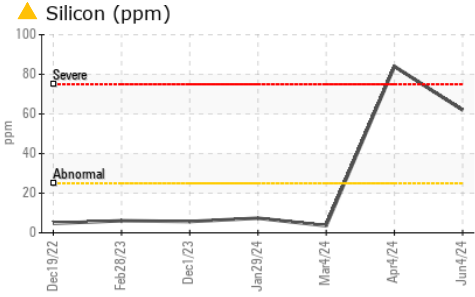

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.6	13.4 ▲ 8.3

GRAPHS

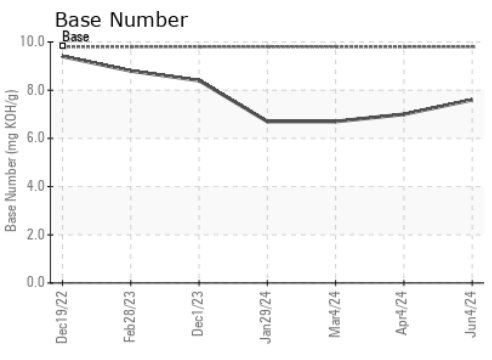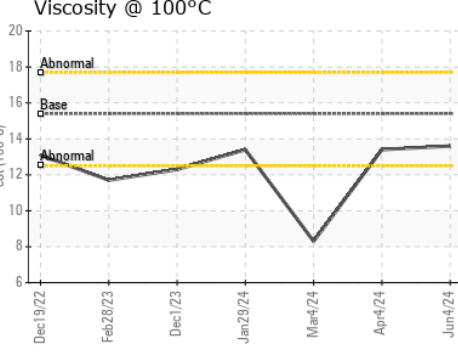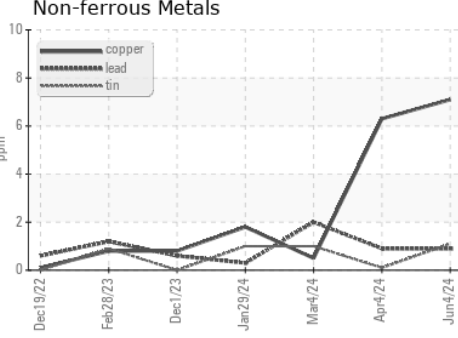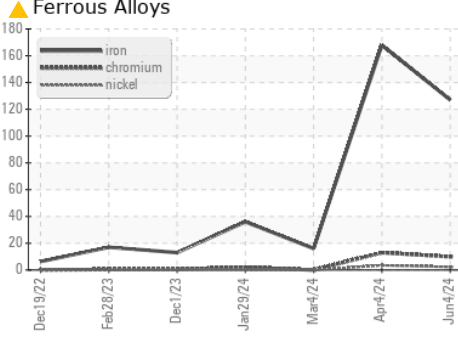

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0118467
Lab Number : 06202316
Unique Number : 11069777
Test Package : FLEET (Additional Tests: Glycol)

Received : 06 Jun 2024
Tested : 11 Jun 2024
Diagnosed : 11 Jun 2024 - Jonathan Hester

GFL Environmental - 893 - OK East Hauling
 2100 Lilly Street
 Seminole, OK
 US 74868
 Contact: Roger Barlow
 rbarlow@gflenv.com
 T: (405)204-6183
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)