




# OIL ANALYSIS REPORT

## Sample Rating Trend

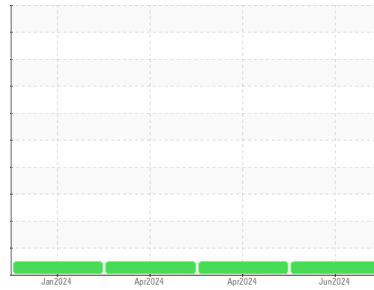

**NORMAL**



Machine Id

**821081**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0118481</b>	GFL0118495	GFL0118487
Sample Date	Client Info	<b>04 Jun 2024</b>	15 Apr 2024	04 Apr 2024
Machine Age	hrs Client Info	<b>0</b>	0	0
Oil Age	hrs Client Info	<b>0</b>	0	0
Oil Changed	Client Info	<b>Not Changed</b>	Not Changd	Not Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>19</b>	68	50
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	2	2
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>4</b>	49	7
Lead	ppm ASTM D5185m >40	<b>&lt;1</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>7</b>	2	10
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>1</b>	2	0
Barium	ppm ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>69</b>	88	65
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>916</b>	1366	921
Calcium	ppm ASTM D5185m 1070	<b>1111</b>	1572	1074
Phosphorus	ppm ASTM D5185m 1150	<b>1056</b>	1658	966
Zinc	ppm ASTM D5185m 1270	<b>1212</b>	1859	1145
Sulfur	ppm ASTM D5185m 2060	<b>3105</b>	4426	3193

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>7</b>	11	17
Sodium	ppm ASTM D5185m	<b>33</b>	5	49
Potassium	ppm ASTM D5185m >20	<b>33</b>	76	31

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	1.2	0.5
Nitration	Abs/cm *ASTM D7624 >20	<b>7.4</b>	8.9	10.3
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>19.2</b>	20.8	21.5


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.6</b>	15.1	17.9
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.6</b>	8.8	8.0




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

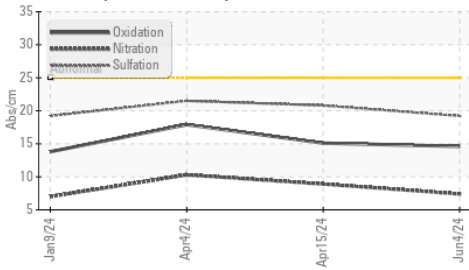

Base Number

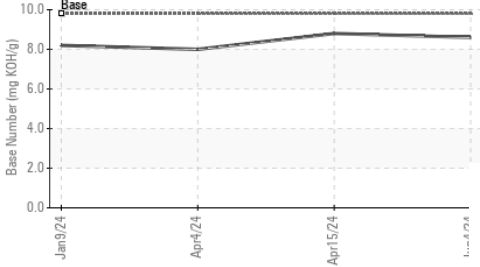

Viscosity @ 100°C

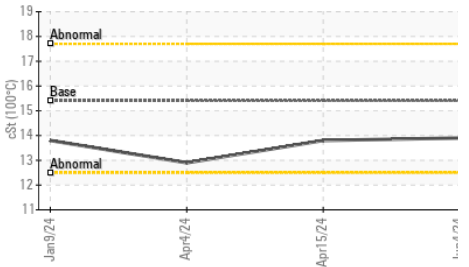


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	13.8

## GRAPHS


Ferrous Alloys

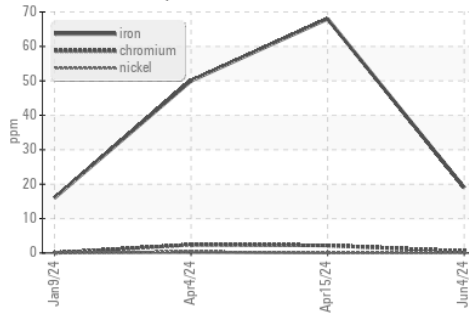


Non-ferrous Metals

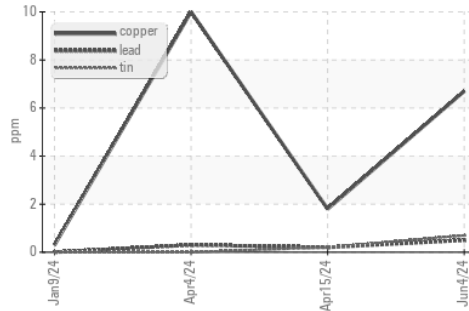

Viscosity @ 100°C

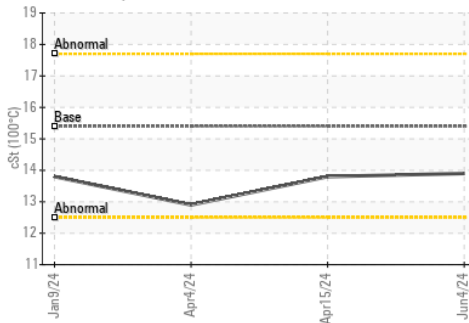

Base Number

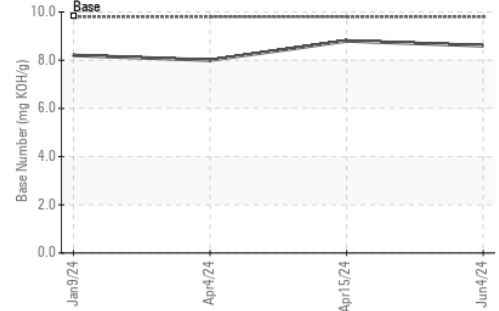

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0118481  
 Lab Number : 06202332  
 Unique Number : 11069793  
 Test Package : FLEET

Received : 06 Jun 2024  
 Tested : 10 Jun 2024  
 Diagnosed : 10 Jun 2024 - Wes Davis

GFL Environmental - 893 - OK East Hauling  
 2100 Lilly Street  
 Seminole, OK  
 US 74868

Contact: Roger Barlow  
 rbarlow@gflenv.com  
 T: (405)204-6183

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: