




OIL ANALYSIS REPORT

Sample Rating Trend

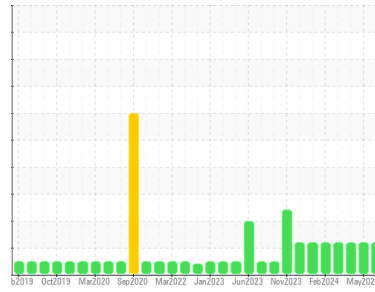

GLYCOL



Machine Id
925039-260315

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | GFL0120209 | GFL0117170 | GFL0117185 |
| Sample Date | Client Info | 05 Jun 2024 | 14 May 2024 | 18 Apr 2024 |
| Machine Age | hrs | 23968 | 23825 | 23652 |
| Oil Age | hrs | 0 | 0 | 600 |
| Oil Changed | Client Info | Not Chngd | Not Chngd | Changed |
| Sample Status | | ABNORMAL | ABNORMAL | ABNORMAL |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel | WC Method >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method >0.2 | NEG | NEG | NEG |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m >110 | 13 | 20 | 24 |
| Chromium | ppm ASTM D5185m >4 | <1 | 2 | <1 |
| Nickel | ppm ASTM D5185m >2 | 0 | <1 | 0 |
| Titanium | ppm ASTM D5185m | 0 | <1 | 0 |
| Silver | ppm ASTM D5185m >2 | 0 | <1 | 0 |
| Aluminum | ppm ASTM D5185m >25 | 2 | 3 | 2 |
| Lead | ppm ASTM D5185m >45 | 7 | <1 | 34 |
| Copper | ppm ASTM D5185m >85 | <1 | 1 | 4 |
| Tin | ppm ASTM D5185m >4 | 0 | <1 | <1 |
| Vanadium | ppm ASTM D5185m | <1 | <1 | 0 |
| Cadmium | ppm ASTM D5185m | 0 | <1 | 0 |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|----------------------|--------------|----------|----------|
| Boron | ppm ASTM D5185m 0 | 4 | 17 | 16 |
| Barium | ppm ASTM D5185m 0 | <1 | 0 | 1 |
| Molybdenum | ppm ASTM D5185m 60 | 72 | 75 | 88 |
| Manganese | ppm ASTM D5185m 0 | <1 | <1 | 1 |
| Magnesium | ppm ASTM D5185m 1010 | 894 | 844 | 939 |
| Calcium | ppm ASTM D5185m 1070 | 1036 | 1012 | 1137 |
| Phosphorus | ppm ASTM D5185m 1150 | 987 | 1037 | 1083 |
| Zinc | ppm ASTM D5185m 1270 | 1173 | 1166 | 1259 |
| Sulfur | ppm ASTM D5185m 2060 | 3420 | 3493 | 3674 |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|---------------------|--------------|--------------|--------------|
| Silicon | ppm ASTM D5185m >30 | 14 | 14 | 17 |
| Sodium | ppm ASTM D5185m | ▲ 495 | ▲ 629 | ▲ 729 |
| Potassium | ppm ASTM D5185m >20 | 3 | 4 | 6 |
| Glycol | % *ASTM D2982 | NEG | NEG | NEG |

INFRA-RED

| method | limit/base | current | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot % | % *ASTM D7844 >3 | 0.8 | 0.5 | 1.2 |
| Nitration | Abs/cm *ASTM D7624 >20 | 8.8 | 6.3 | 11.2 |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | 20.3 | 18.2 | 22.5 |


FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation | Abs/.1mm *ASTM D7414 >25 | 14.8 | 12.7 | 16.9 |
| Base Number (BN) | mg KOH/g ASTM D2896 9.8 | 9.8 | 11.4 | 9.3 |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

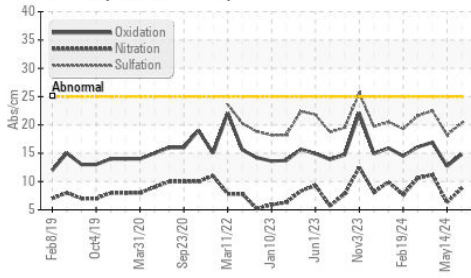


Glycol Contamination

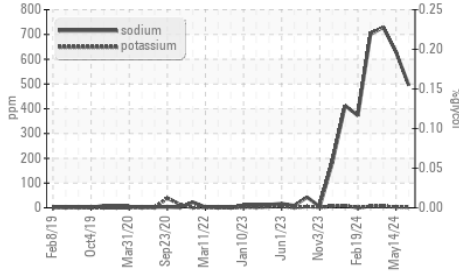

Viscosity @ 100°C

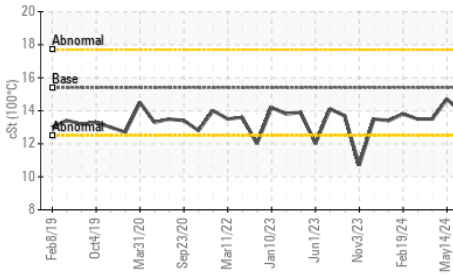

Glycol Contamination

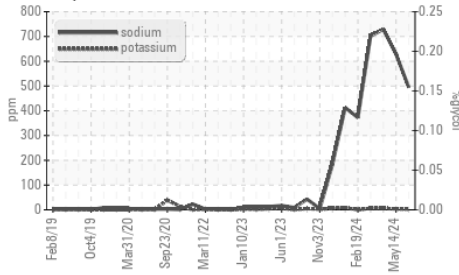


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.9 | 14.7 |

GRAPHS


Ferrous Alloys

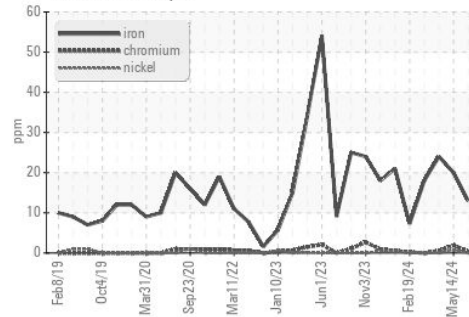


Non-ferrous Metals

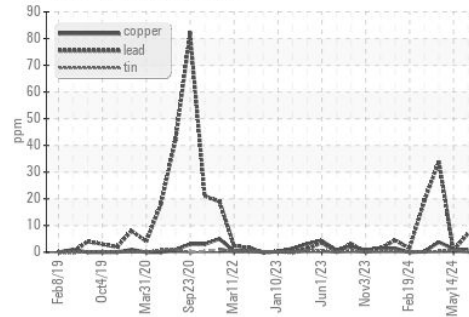

Viscosity @ 100°C

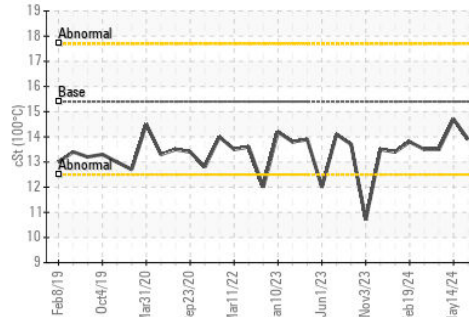

Base Number

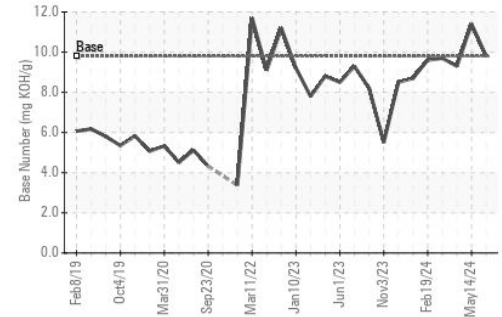

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0120209

Lab Number : 06202481

Unique Number : 11069942

Test Package : FLEET (Additional Tests: Glycol)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 07 Jun 2024

Tested : 11 Jun 2024

Diagnosed : 11 Jun 2024 - Sean Felton

GFL Environmental - 836 - Kansas City Hauling

7801 East Truman Road

Kansas City, MO

US 64126

Contact: Loyce Stewart

loyce.stewart@gflen.com

T:

F: