




# OIL ANALYSIS REPORT

Sample Rating Trend

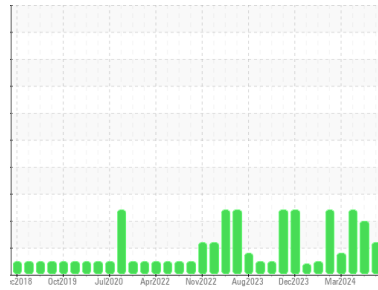

GLYCOL



Area  
**GFL836**  
 Machine Id  
**425062-402315**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Check for low coolant level. We advise that you check for the source of the coolant leak. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0120207</b>	GFL0120173	GFL0114006
Sample Date	Client Info			<b>05 Jun 2024</b>	16 May 2024	29 Mar 2024
Machine Age	hrs	Client Info		<b>26128</b>	25988	25538
Oil Age	hrs	Client Info		<b>0</b>	600	0
Oil Changed	Client Info			<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	SEVERE

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	0.2	▲ 9.6
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>12</b>	52	26
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	2
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	2	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	▲ 43	3
Lead	ppm	ASTM D5185m	>40	<b>7</b>	11	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	6	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	2	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>4</b>	7	2
Barium	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>72</b>	66	55
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	3	<1
Magnesium	ppm	ASTM D5185m	1010	<b>890</b>	656	870
Calcium	ppm	ASTM D5185m	1070	<b>1046</b>	1861	1062
Phosphorus	ppm	ASTM D5185m	1150	<b>1005</b>	987	948
Zinc	ppm	ASTM D5185m	1270	<b>1175</b>	1143	1180
Sulfur	ppm	ASTM D5185m	2060	<b>3441</b>	2941	3387





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>14</b>	13	5
Sodium	ppm	ASTM D5185m		▲ <b>493</b>	4	5
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	23	1
Glycol	%	*ASTM D2982		<b>NEG</b>	NEG	NEG

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.1	1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.8</b>	11.9	11.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.3</b>	28.0	20.5

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>14.8</b>	24.2	18.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.8</b>	▲ 3.3	7.5







# OIL ANALYSIS REPORT

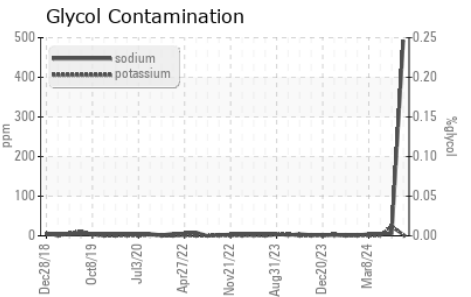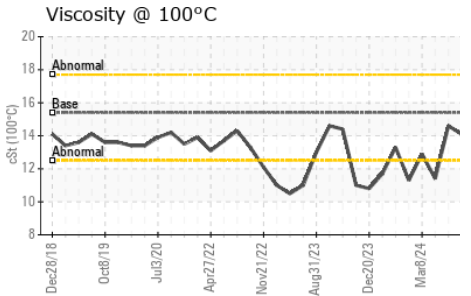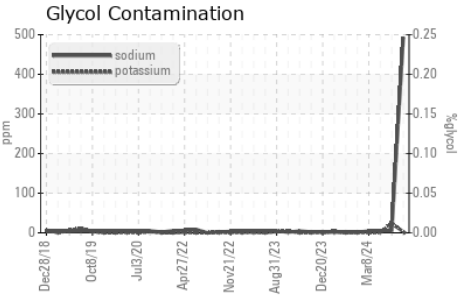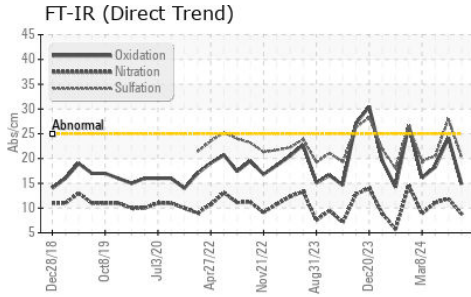

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.6	▲ 11.4

## GRAPHS

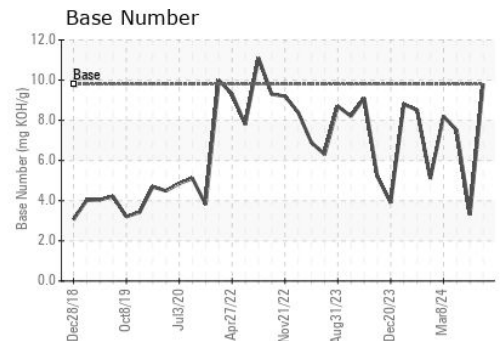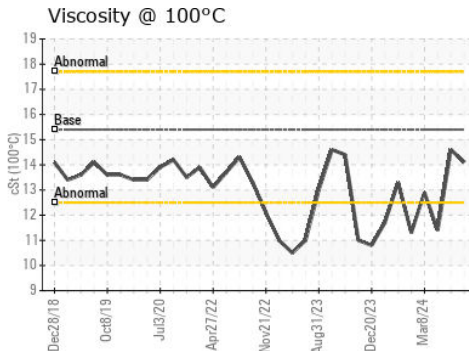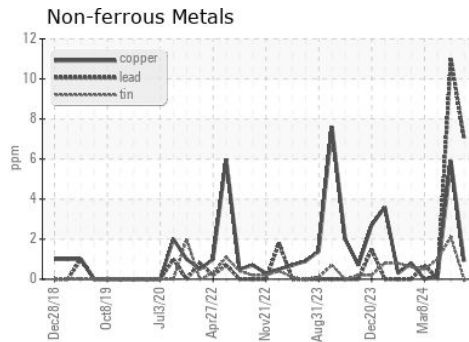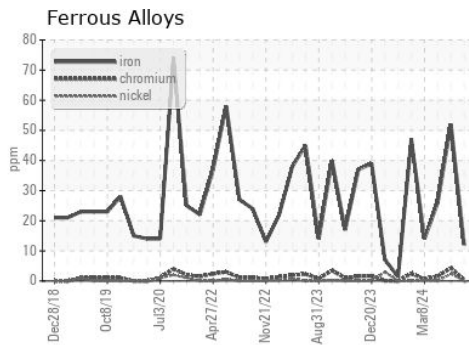

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0120207

Lab Number : 06202485

Unique Number : 11069946

Test Package : FLEET ( Additional Tests: Glycol )

Received : 07 Jun 2024

Tested : 11 Jun 2024

Diagnosed : 11 Jun 2024 - Sean Felton

GFL Environmental - 836 - Kansas City Hauling

7801 East Truman Road

Kansas City, MO

US 64126

Contact: Loyce Stewart

loyce.stewart@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)