


OIL ANALYSIS REPORT

_



NORMAL



Machine Id 338659 Component

Diesel Engine

PETRO CANADA DURON SHP 10W30 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

Metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

GAL)		No	2023	Mar2024 May20	24	
SAMPLE INFORI	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0127002	PCA0120636	PCA0110455
Sample Date		Client Info		30 May 2024	14 Mar 2024	02 Nov 2023
Machine Age	mls	Client Info		48187	35421	15052
Oil Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	84	63	32
Chromium	ppm	ASTM D5185m	>20	1	2	1
Nickel	ppm	ASTM D5185m	>4	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	28	21	12
Lead	ppm	ASTM D5185m	>40	0	<1	1
Copper	ppm	ASTM D5185m	>330	21	15	9
Tin	ppm	ASTM D5185m	>15	2	1	2
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	8	9	20
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	50	59	55	52
Manganese	ppm	ASTM D5185m	0	7	6	5
Magnesium	ppm	ASTM D5185m	950	796	855	855
Calcium	ppm	ASTM D5185m	1050	1341	1369	1234
Phosphorus	ppm	ASTM D5185m	995	857	889	981
Zinc	ppm	ASTM D5185m	1180	1112	1100	1177
Sulfur	ppm	ASTM D5185m	2600	2842	3210	2932
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	9	23	30
Sodium	ppm	ASTM D5185m		8	5	1
Potassium	ppm	ASTM D5185m	>20	56	42	28
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1	0.6	0.2
Nitration	Abs/cm	*ASTM D7624	>20	11.7	10.2	6.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	23.4	21.0	19.4
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.2	18.9	15.8
Base Number (BN)	mg KOH/g	ASTM D2896		6.5	7.3	9.7



OIL ANALYSIS REPORT

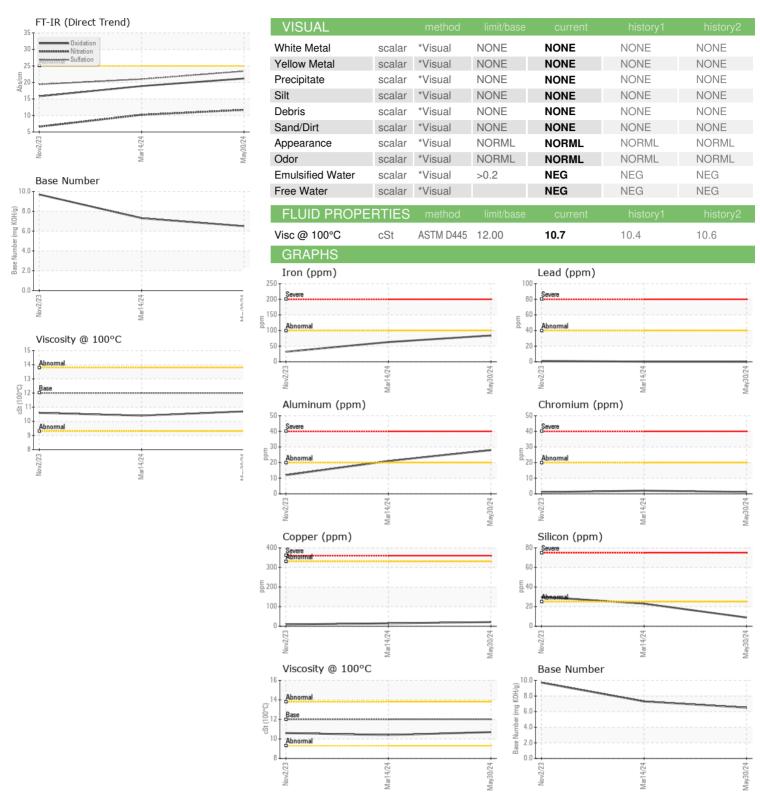





Certificate 12367

Laboratory Sample No.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 : PCA0127002 Lab Number : 06209804

Unique Number : 11082668

Received **Tested**

Diagnosed Test Package : MOB 1 (Additional Tests: TBN)

: 14 Jun 2024

: 15 Jun 2024

: 15 Jun 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-237-1369. st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

39 INDUSTRIAL AVE HASBROUCK HEIGHTS, NJ

US 07604 Contact: MIKE LONGETTE mlongette@millertransgroup.com

MILLER TRUCK LEASING #119

T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (201)528-7053