


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

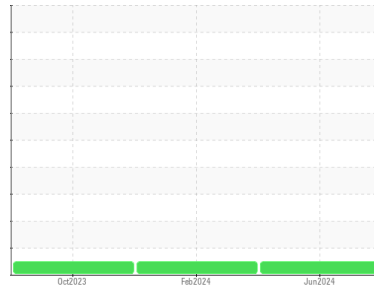

Area
(P1085250) Preferred Service-Tractor
 Machine Id
[Preferred Service-Tractor] 192A32008B
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON UHP 5W30 (36 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	PCA0126918	PCA0115786	PCA0109408	
Sample Date	Client Info	12 Jun 2024	08 Feb 2024	30 Oct 2023	
Machine Age	mls	Client Info	188474	174481	147231
Oil Age	mls	Client Info	13993	27250	19076
Oil Changed	Client Info	Not Changed	Changed	Not Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >6.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	33	38	30
Chromium	ppm ASTM D5185m >20	<1	<1	<1
Nickel	ppm ASTM D5185m >2	0	<1	0
Titanium	ppm ASTM D5185m	<1	0	0
Silver	ppm ASTM D5185m >2	0	<1	0
Aluminum	ppm ASTM D5185m >25	5	16	4
Lead	ppm ASTM D5185m >40	2	2	1
Copper	ppm ASTM D5185m >330	9	153	7
Tin	ppm ASTM D5185m >15	1	4	<1
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	23	202	14
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 64	61	116	57
Manganese	ppm ASTM D5185m 0	1	4	<1
Magnesium	ppm ASTM D5185m 1160	1142	665	1039
Calcium	ppm ASTM D5185m 820	903	1429	809
Phosphorus	ppm ASTM D5185m 1160	1085	701	913
Zinc	ppm ASTM D5185m 1260	1299	842	1215
Sulfur	ppm ASTM D5185m 3000	3823	2365	2990

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	6	66	6
Sodium	ppm ASTM D5185m	6	4	4
Potassium	ppm ASTM D5185m >20	6	50	4




INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.4	0.5	0.5
Nitration	Abs/cm *ASTM D7624 >20	10.0	10.1	10.3
Sulfation	Abs/.1mm *ASTM D7415 >30	21.9	25.2	23.3

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	20.4	23.9	21.2
Base Number (BN)	mg KOH/g ASTM D2896 11.0	6.9	7.2	6.9





OIL ANALYSIS REPORT

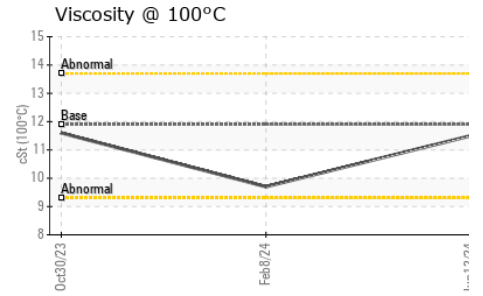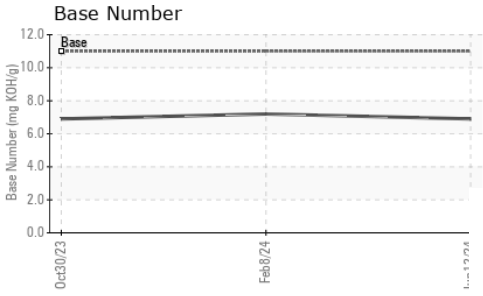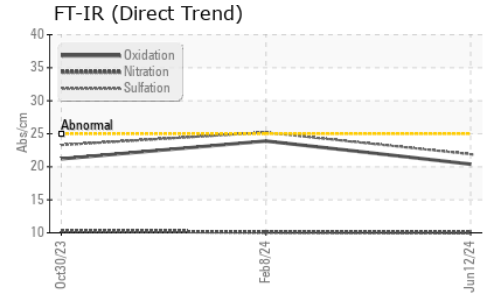

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	11.9	11.5	9.7	11.6

GRAPHS

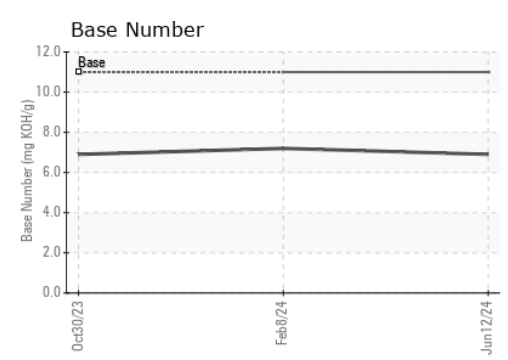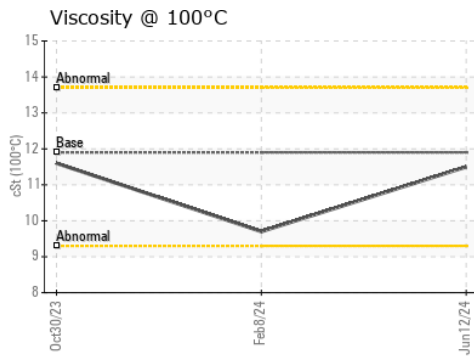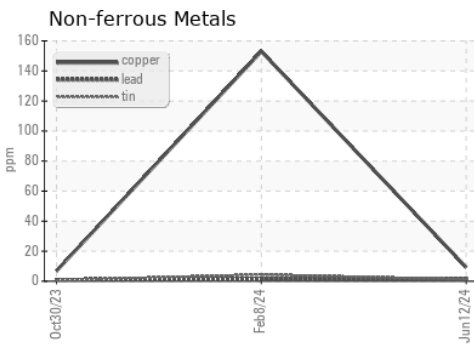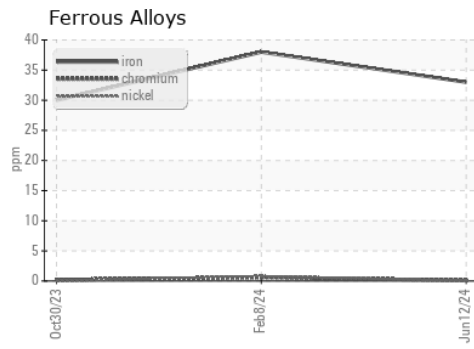

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0126918 **Received** : 14 Jun 2024
Lab Number : 06209824 **Tested** : 15 Jun 2024
Unique Number : 11082688 **Diagnosed** : 15 Jun 2024 - Wes Davis
Test Package : FLEET

Transervice - Shop 1920 - Preferred Service
 1955 W. North Avenue, Bldg K
 Melrose Park, IL
 US 60160
 Contact: Tom Lindeman
 tlindemann@transervice.com
 T: (630)376-8946
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)