

# **PROBLEM SUMMARY**

# Sample Rating Trend




(YA133468) Machine Id 2639C

**Natural Gas Engine** 

**CHEVRON DELO 400 NG (40 QTS)** 

# **COMPONENT CONDITION SUMMARY**

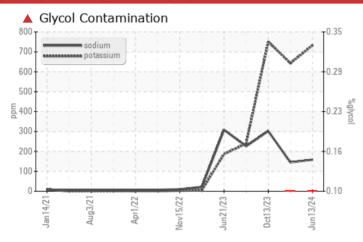

# RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS							
Sample Status				SEVERE	SEVERE	ABNORMAL	
Sodium	ppm	ASTM D5185m		<u> </u>	<u> </u>	<u></u> 302	
Potassium	ppm	ASTM D5185m	>20	<b>733</b>	<b>△</b> 643	<u></u> 751	
Glycol	%	*ASTM D2982		<b>▲</b> 0.10	<b>▲</b> 0.10		

Customer Id: GFL018 Sample No.: GFL0115989 Lab Number: 06209848 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:

Don Baldridge +1 don.b505@comcast.net

To change component or sample information: Customer Service +1 1-800-237-1369 customerservice@wearcheck.com

RECOMMENDED ACTIONS					
Action	Status	Date	Done By	Description	
Resample			?	We recommend an early resample to monitor this condition.	
Check Glycol Access			?	We advise that you check for the source of the coolant leak.	

# HISTORICAL DIAGNOSIS

# 29 May 2024 Diag: Don Baldridge

13 Oct 2023 Diag: Jonathan Hester

14 Aug 2023 Diag: Angela Borella

**GLYCOL** 



We advise that you check for the source of the coolant leak. Check for low coolant level. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. All component wear rates are normal. Sodium and/or potassium levels are high. Test for glycol is positive. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.





We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.





We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.All component wear rates are normal. Sodium and/or potassium levels are high. The BN result indicates that there is suitable alkalinity remaining in the oil.





**OIL ANALYSIS REPORT** 

(YA133468) 2639C

**Natural Gas Engine** 

**CHEVRON DELO 400 NG (40 QTS)** 

# Sample Rating Trend

# **DIAGNOSIS**

# Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

# Wear

All component wear rates are normal.

# Contamination

Sodium and/or potassium levels are high. Test for glycol is positive.


# Fluid Condition


The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.


		Jan 2021	Aug2021 Apr2022	Nov2022 Jun2023 Oct2023	Jun2024	
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		GFL0115989	GFL0090024	GFL0080513
Sample Date		Client Info		13 Jun 2024	29 May 2024	13 Oct 2023
Machine Age	hrs	Client Info		0	10605	10605
Oil Age	hrs	Client Info		0	0	10605
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				SEVERE	SEVERE	ABNORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.1	NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	24	21	26
Chromium	ppm	ASTM D5185m	>4	2	2	3
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>9	3	3	0
Lead	ppm	ASTM D5185m	>30	12	14	3
Copper	ppm	ASTM D5185m	>35	2	2	1
Tin	ppm	ASTM D5185m	>4	1	1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	<1	0
ADDITIVES		and the section	1::-		11.	h:-t0
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	ilmit/base	31	nistory1 39	nistory2 11
	ppm		iimi/base			
Boron		ASTM D5185m	iimivbase	31	39	11
Boron Barium	ppm	ASTM D5185m ASTM D5185m	IImivoase	31 0	39 0	11 2
Boron Barium Molybdenum	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	iimii/base	31 0 57	39 0 58	11 2 67
Boron Barium Molybdenum Manganese	ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	iimii/base	31 0 57 <1	39 0 58 <1	11 2 67 <1
Boron Barium Molybdenum Manganese Magnesium	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	800	31 0 57 <1 535	39 0 58 <1 577	11 2 67 <1 492
Boron Barium Molybdenum Manganese Magnesium Calcium	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m		31 0 57 <1 535 1468	39 0 58 <1 577 1695	11 2 67 <1 492 1525
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	800	31 0 57 <1 535 1468 676	39 0 58 <1 577 1695 885	11 2 67 <1 492 1525 663
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	800	31 0 57 <1 535 1468 676 919	39 0 58 <1 577 1695 885 1028	11 2 67 <1 492 1525 663 921
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	800 880	31 0 57 <1 535 1468 676 919 2592	39 0 58 <1 577 1695 885 1028 3304	11 2 67 <1 492 1525 663 921 2467
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	800 880 limit/base	31 0 57 <1 535 1468 676 919 2592 current	39 0 58 <1 577 1695 885 1028 3304 history1	11 2 67 <1 492 1525 663 921 2467 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m	800 880 limit/base	31 0 57 <1 535 1468 676 919 2592 current	39 0 58 <1 577 1695 885 1028 3304 history1	11 2 67 <1 492 1525 663 921 2467 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm	ASTM D5185m	800 880 limit/base >+100	31 0 57 <1 535 1468 676 919 2592 current 9 ▲ 159	39 0 58 <1 577 1695 885 1028 3304 history1 9 ▲ 145	11 2 67 <1 492 1525 663 921 2467 history2 13 ▲ 302
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm	ASTM D5185m	800 880 limit/base >+100	31 0 57 <1 535 1468 676 919 2592 current 9 ▲ 159 ▲ 733	39 0 58 <1 577 1695 885 1028 3304 history1 9 ▲ 145 ▲ 643	11 2 67 <1 492 1525 663 921 2467 history2 13  302 751
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Glycol	ppm	ASTM D5185m	800 880 limit/base >+100 >20	31 0 57 <1 535 1468 676 919 2592 current 9 ▲ 159 ▲ 733 ▲ 0.10	39 0 58 <1 577 1695 885 1028 3304 history1 9 ▲ 145 ▲ 643 ▲ 0.10	11 2 67 <1 492 1525 663 921 2467 history2 13  302 751
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Glycol INFRA-RED	ppm	ASTM D5185m *ASTM D5185m *ASTM D5185m *ASTM D5185m *ASTM D5185m *ASTM D5185m *ASTM D2982	800 880 limit/base >+100 >20	31 0 57 <1 535 1468 676 919 2592 current 9 ▲ 159 ▲ 733 ▲ 0.10	39 0 58 <1 577 1695 885 1028 3304 history1 9 △ 145 △ 643 △ 0.10 history1	11 2 67 <1 492 1525 663 921 2467 history2 13 △ 302 △ 751 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Glycol INFRA-RED Soot %	ppm	ASTM D5185m *ASTM D5185m	800 880 limit/base >+100 >20	31 0 57 <1 535 1468 676 919 2592 current 9 ▲ 159 ▲ 733 ▲ 0.10 current 0.1	39 0 58 <1 577 1695 885 1028 3304 history1 9 △ 145 △ 643 △ 0.10 history1 0.1	11 2 67 <1 492 1525 663 921 2467 history2 13  302 751 history2 0
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Glycol INFRA-RED Soot % Nitration	ppm	ASTM D5185m *ASTM D7844 *ASTM D7624 *ASTM D7624	800 880 limit/base >+100 >20 limit/base	31 0 57 <1 535 1468 676 919 2592 current 9 ▲ 159 ▲ 733 ▲ 0.10 current 0.1 8.7	39 0 58 <1 577 1695 885 1028 3304 history1 9 △ 145 △ 643 △ 0.10 history1 0.1 8.1	11 2 67 <1 492 1525 663 921 2467 history2 13  302 751 history2 0 11.4
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Glycol INFRA-RED Soot % Nitration Sulfation FLUID DEGRAE	ppm	ASTM D5185m *ASTM D5185m *ASTM D5185m *ASTM D5185m *ASTM D5185m *ASTM D5185m *ASTM D2982 *ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844 *ASTM D7844	800 880 limit/base >+100 >20 limit/base >20 >30 limit/base	31 0 57 <1 535 1468 676 919 2592 current 9 ▲ 159 ▲ 733 ▲ 0.10 current 0.1 8.7 20.5 current	39 0 58 <1 577 1695 885 1028 3304 history1 9 △ 145 △ 643 △ 0.10 history1 0.1 8.1 20.2 history1	11 2 67 <1 492 1525 663 921 2467 history2 13  302 751 history2 0 11.4 23.2 history2
Boron Barium Molybdenum Manganese Magnesium Calcium Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Glycol INFRA-RED Soot % Nitration Sulfation	ppm	ASTM D5185m *ASTM D7844 *ASTM D7624 *ASTM D7624	800 880 limit/base >+100 >20 limit/base >30 limit/base	31 0 57 <1 535 1468 676 919 2592 current 9 ▲ 159 ▲ 733 ▲ 0.10 current 0.1 8.7 20.5	39 0 58 <1 577 1695 885 1028 3304 history1 9 △ 145 △ 643 △ 0.10 history1 0.1 8.1 20.2	11 2 67 <1 492 1525 663 921 2467 history2 13 △ 302 △ 751 history2 0 11.4 23.2




# **OIL ANALYSIS REPORT**

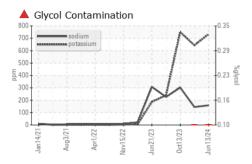










VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
<b>Emulsified Water</b>	scalar	*Visual	>0.1	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG


FLUID PROP	ERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.8	14.3	14.1	14.8

# **GRAPHS**







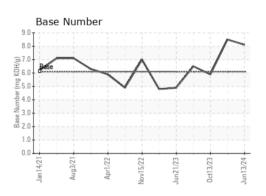





Certificate 12367

Laboratory Sample No.

: GFL0115989 Lab Number : 06209848 Unique Number : 11082712

Test Package : FLEET

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested** Diagnosed

: 14 Jun 2024 : 17 Jun 2024 : 17 Jun 2024 - Don Baldridge

GFL Environmental - 018 - Fayetteville

4621 Marracco Drive Hope Mills, NC US 28348

Contact: Robert Carter robert.carter@gflenv.com T: (910)596-1170

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)