


OIL ANALYSIS REPORT



Area
G.LOPES CONSTRUCTION INC./Off-Road
 Machine Id
BH42
 Component
Front Differential
 Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

Sample Rating Trend

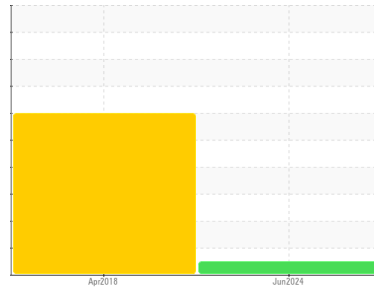

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0109699	PCA13317002	---
Sample Date	Client Info		12 Jun 2024	13 Apr 2018	---
Machine Age	hrs	Client Info	3887	2167	---
Oil Age	hrs	Client Info	3887	---	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			NORMAL	SEVERE	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	20	49	---
Chromium	ppm	ASTM D5185m >3	0	0	---
Nickel	ppm	ASTM D5185m >3	0	0	---
Titanium	ppm	ASTM D5185m >2	<1	---	---
Silver	ppm	ASTM D5185m >2	0	---	---
Aluminum	ppm	ASTM D5185m >30	2	1	---
Lead	ppm	ASTM D5185m >13	<1	4	---
Copper	ppm	ASTM D5185m >103	21	▲ 92	---
Tin	ppm	ASTM D5185m >5	2	8	---
Vanadium	ppm	ASTM D5185m	0	---	---
Cadmium	ppm	ASTM D5185m	0	---	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	11	2	---
Barium	ppm	ASTM D5185m	0	3	---
Molybdenum	ppm	ASTM D5185m	3	0	---
Manganese	ppm	ASTM D5185m	<1	---	---
Magnesium	ppm	ASTM D5185m	31	7	---
Calcium	ppm	ASTM D5185m	3694	2767	---
Phosphorus	ppm	ASTM D5185m	1252	929	---
Zinc	ppm	ASTM D5185m	1507	1032	---
Sulfur	ppm	ASTM D5185m	16063	---	---


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >100	9	11	---
Sodium	ppm	ASTM D5185m	5	2	---
Potassium	ppm	ASTM D5185m >20	2	4	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.40	---	---

OIL ANALYSIS REPORT

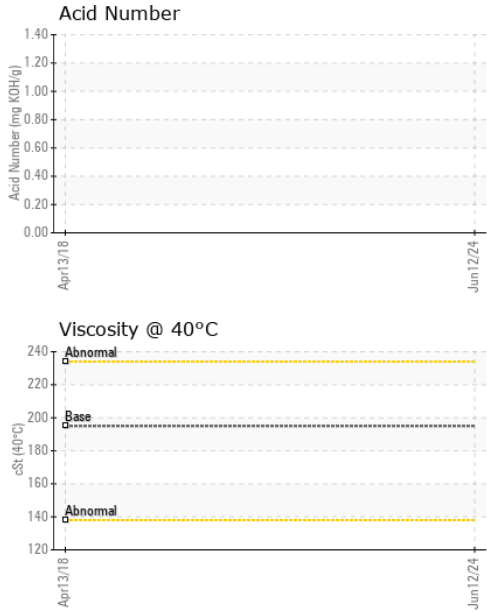


VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	LIGHT	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	195	154	---	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

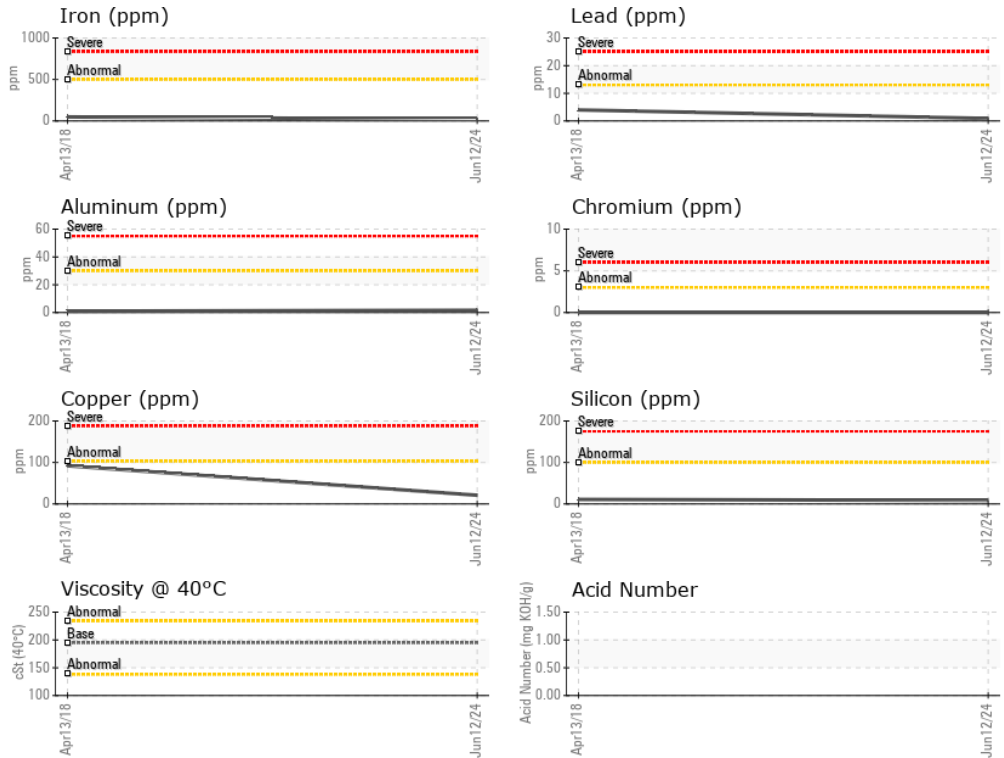

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109699 **Received** : 14 Jun 2024
Lab Number : **06210316** **Tested** : 18 Jun 2024
Unique Number : 11083180 **Diagnosed** : 18 Jun 2024 - Don Baldrige
Test Package : MOB 2

G LOPES CONSTRUCTION
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: BUTCH MCGRATH
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)