


OIL ANALYSIS REPORT



Area
Rear Load
 Machine Id
REL133322
 Component
Transmission (Auto)
 Fluid
{not provided} (--- GAL)

Sample Rating Trend

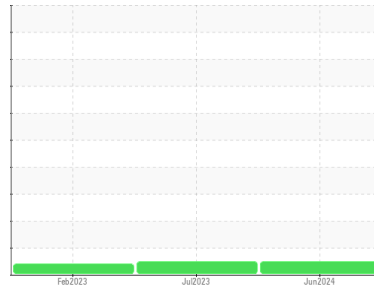

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is Mineral ATF. Please confirm the fluid type and grade, and specify the brand of the fluid on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the fluid.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0122604	PCA0090703	PCA0083083
Sample Date	Client Info		06 Jun 2024	03 Jul 2023	20 Feb 2023
Machine Age	hrs	Client Info	27063	27063	26052
Oil Age	hrs	Client Info	27063	26560	24524
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >220	37	74	61
Chromium	ppm	ASTM D5185m >2	0	0	<1
Nickel	ppm	ASTM D5185m >5	0	<1	0
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >5	0	0	0
Aluminum	ppm	ASTM D5185m >75	13	26	16
Lead	ppm	ASTM D5185m >95	2	9	6
Copper	ppm	ASTM D5185m >60	11	25	12
Tin	ppm	ASTM D5185m >10	<1	2	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	97	77	84
Barium	ppm	ASTM D5185m	0	2	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1
Manganese	ppm	ASTM D5185m	0	<1	2
Magnesium	ppm	ASTM D5185m	<1	3	4
Calcium	ppm	ASTM D5185m	85	117	111
Phosphorus	ppm	ASTM D5185m	282	221	216
Zinc	ppm	ASTM D5185m	0	5	24
Sulfur	ppm	ASTM D5185m	1609	1879	1581


CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	6	11	8
Sodium	ppm	ASTM D5185m	1	3	3
Potassium	ppm	ASTM D5185m >20	<1	1	<1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.32	1.24	1.33

OIL ANALYSIS REPORT

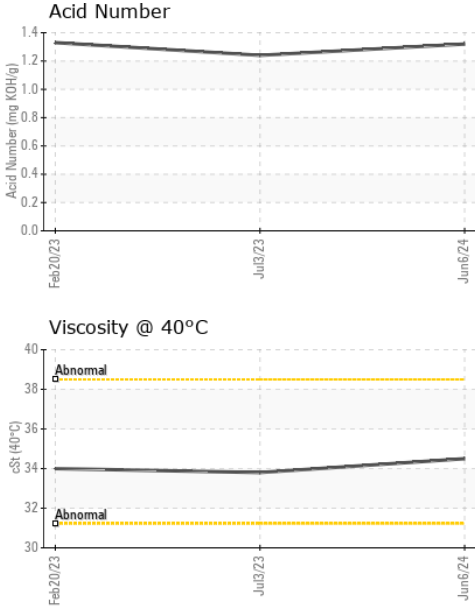


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	LIGHT	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	34.5	33.8	34.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

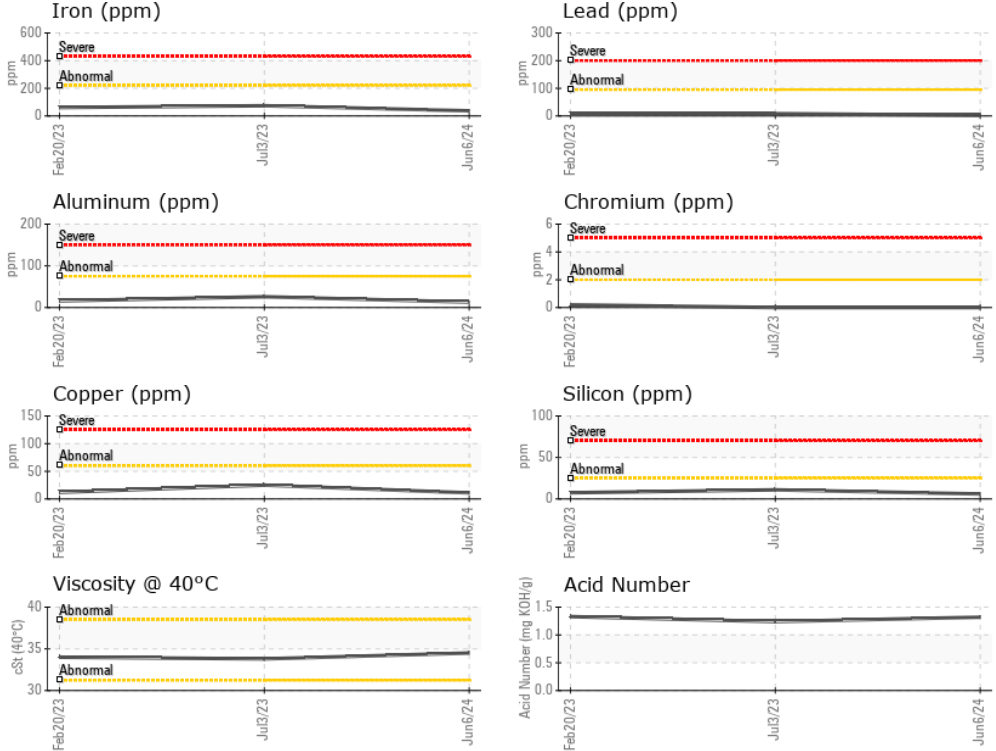

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0122604 **Received** : 14 Jun 2024
Lab Number : **06210332** **Tested** : 17 Jun 2024
Unique Number : 11083196 **Diagnosed** : 17 Jun 2024 - Wes Davis
Test Package : MOB 2

UMM - Shop 401 - Norton
 186 South Washington Street
 Norton, MA
 US 02766
 Contact: P Cohen
 pcohen@win-waste.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)