

OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL



Machine Id
JRV Duron HP 15W40 Bulk Tank
 Component
New (Unused) Oil
 Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

This is a baseline read-out on the submitted sample.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0122977	---	---
Sample Date	Client Info			13 Jun 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Oil Changed	Client Info			N/A	---	---
Sample Status				NORMAL	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method			NEG	---	---





WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m		<1	---	---
Chromium	ppm	ASTM D5185m		0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		1	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		0	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
Cadmium	ppm	ASTM D5185m		0	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		9	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		55	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		974	---	---
Calcium	ppm	ASTM D5185m		1230	---	---
Phosphorus	ppm	ASTM D5185m		1148	---	---
Zinc	ppm	ASTM D5185m		1368	---	---
Sulfur	ppm	ASTM D5185m		4203	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m		5	---	---
Sodium	ppm	ASTM D5185m		<1	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.66	---	---

OIL ANALYSIS REPORT

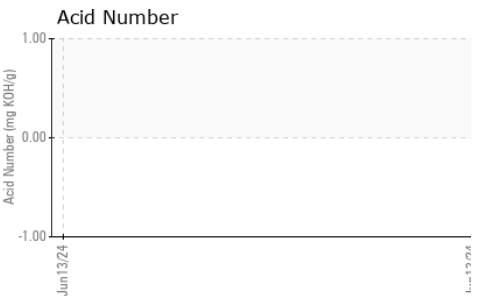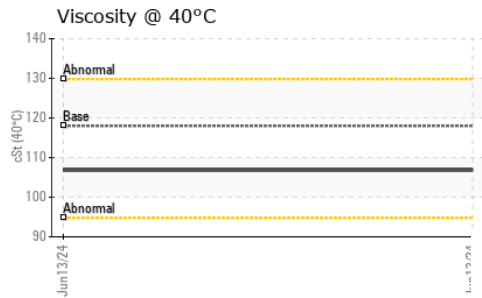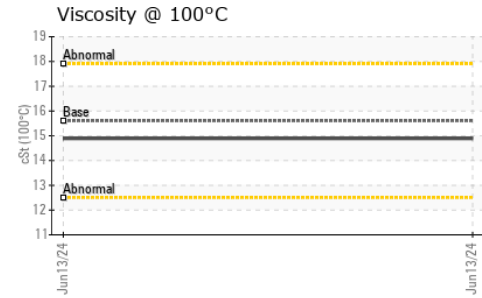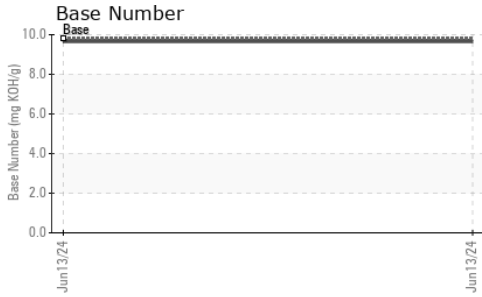





VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual		NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	118	106.8	---	---
Visc @ 100°C	cSt	ASTM D445	15.6	14.89	---	---
Viscosity Index (VI)	Scale	ASTM D2270	139	144	---	---

SAMPLE IMAGES

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

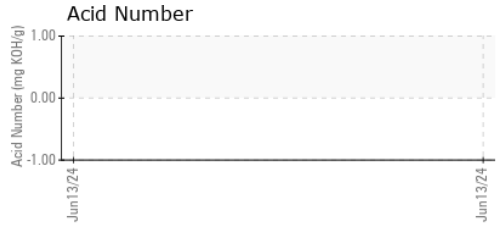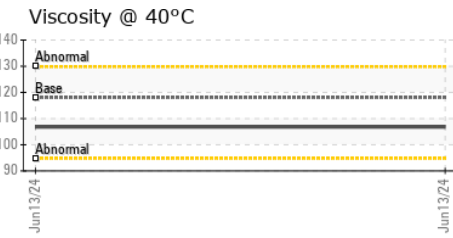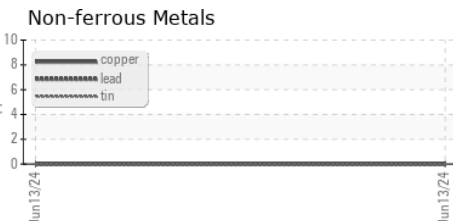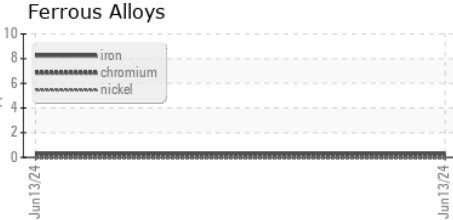

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0122977 **Received** : 14 Jun 2024
Lab Number : 06210629 **Tested** : 18 Jun 2024
Unique Number : 11083493 **Diagnosed** : 18 Jun 2024 - Doug Bogart
Test Package : MOB 2 (Additional Tests: FT-IR, KV100, PrtCount, TBN, VI)

DENNIS K BURKE INC
 555 CONSTITUTION DR
 TAUNTON, MA
 US 02780
 Contact: GREG DUNKER
 greg.dunker@burkeoil.com
 T: (800)289-2875
 F: (617)889-6422

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)