




# OIL ANALYSIS REPORT



Machine Id  
**MACK 423086**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

Sample Rating Trend

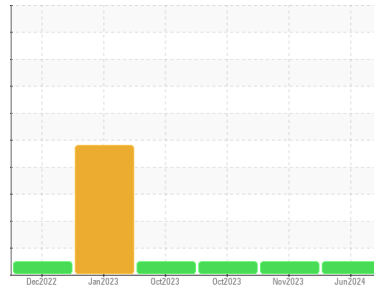

**NORMAL**



## DIAGNOSIS

**Recommendation**  
 Resample at the next service interval to monitor.

**Wear**  
 All component wear rates are normal.

**Contamination**  
 There is no indication of any contamination in the oil.

**Fluid Condition**  
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0099196</b>	GFL0083721	GFL0099155
Sample Date	Client Info		<b>10 Jun 2024</b>	07 Nov 2023	31 Oct 2023
Machine Age	mls	Client Info	<b>463347</b>	463347	462994
Oil Age	mls	Client Info	<b>463347</b>	445685	462994
Oil Changed	Client Info		<b>N/A</b>	Changed	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>48</b>	30	28
Chromium	ppm	ASTM D5185m >20	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>0</b>	<1	1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	2	2
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	7	8
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	<b>4</b>	2	2
Barium	ppm	ASTM D5185m 10	<b>0</b>	<1	<1
Molybdenum	ppm	ASTM D5185m 100	<b>66</b>	59	63
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 450	<b>932</b>	856	891
Calcium	ppm	ASTM D5185m 3000	<b>1100</b>	1015	1112
Phosphorus	ppm	ASTM D5185m 1150	<b>1011</b>	866	968
Zinc	ppm	ASTM D5185m 1350	<b>1349</b>	1113	1186
Sulfur	ppm	ASTM D5185m 4250	<b>3317</b>	2807	2799

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	4	4
Sodium	ppm	ASTM D5185m >158	<b>36</b>	3	0
Potassium	ppm	ASTM D5185m >20	<b>16</b>	4	3
Glycol	%	*ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>1</b>	0.6	0.6
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.0</b>	9.3	9.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.2</b>	20.9	20.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>19.1</b>	16.9	16.7
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	<b>7.7</b>	6.6	6.9







# OIL ANALYSIS REPORT

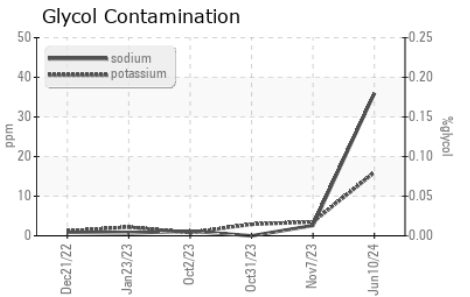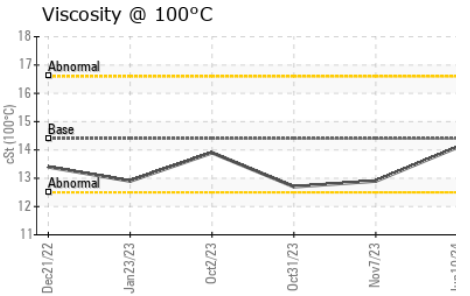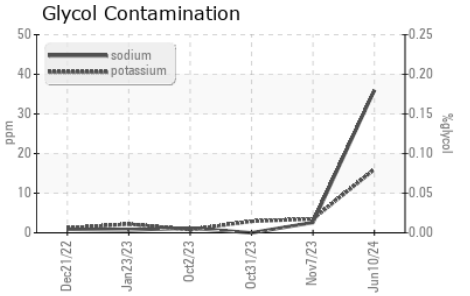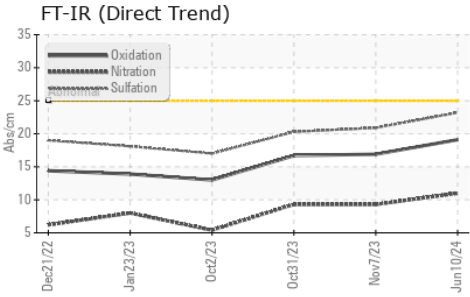

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	14.1	12.9

## GRAPHS

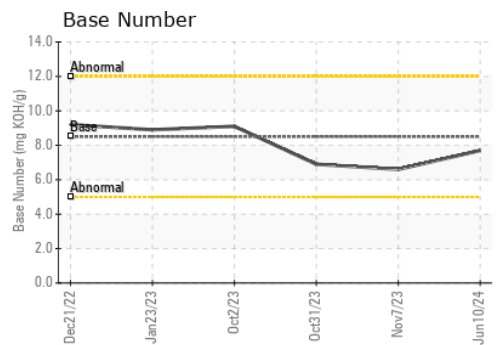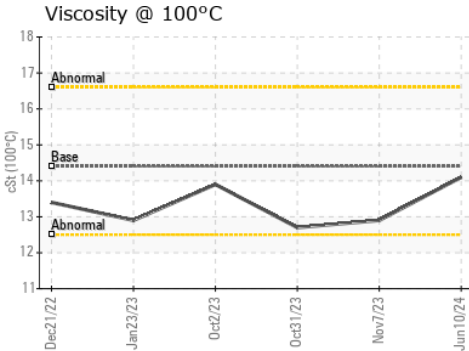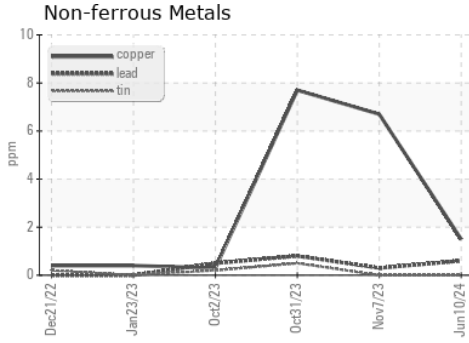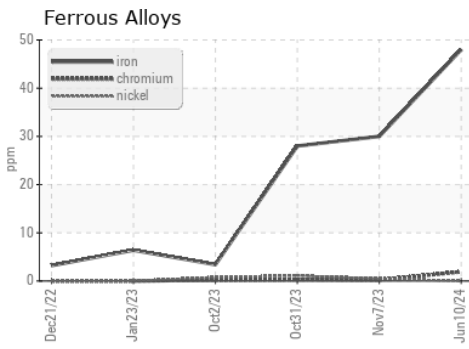

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0099196      **Received** : 14 Jun 2024  
**Lab Number** : 06211049      **Tested** : 19 Jun 2024  
**Unique Number** : 11083913      **Diagnosed** : 19 Jun 2024 - Sean Felton  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 842 - Lewisport Hauling**  
 4995 US Highway 60 West  
 Lewisport, KY  
 US 42351

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)