


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

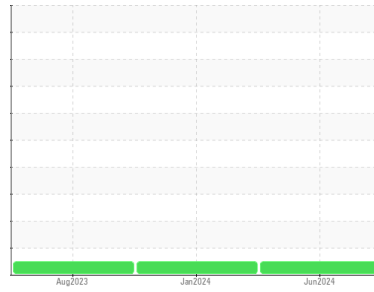

Area
(YA171053) 2
 Machine Id
832012
 Component
Natural Gas Engine
 Fluid
PETRO CANADA DURON GEO LD 15W40 (36 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0124218	PCA0101774	PCA0101738
Sample Date	Client Info			13 Jun 2024	09 Jan 2024	07 Aug 2023
Machine Age	hrs	Client Info		3363	2238	1203
Oil Age	hrs	Client Info		1125	1035	1203
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	14	14	31
Chromium	ppm	ASTM D5185m	>4	<1	<1	1
Nickel	ppm	ASTM D5185m	>2	<1	1	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	<1
Aluminum	ppm	ASTM D5185m	>9	4	4	2
Lead	ppm	ASTM D5185m	>30	2	2	0
Copper	ppm	ASTM D5185m	>35	2	2	12
Tin	ppm	ASTM D5185m	>4	<1	2	2
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	50	14	1	7
Barium	ppm	ASTM D5185m	5	0	0	2
Molybdenum	ppm	ASTM D5185m	50	55	54	63
Manganese	ppm	ASTM D5185m	0	<1	2	9
Magnesium	ppm	ASTM D5185m	560	659	625	823
Calcium	ppm	ASTM D5185m	1510	1888	1703	1537
Phosphorus	ppm	ASTM D5185m	780	906	783	769
Zinc	ppm	ASTM D5185m	870	1106	1066	1029
Sulfur	ppm	ASTM D5185m	2040	3053	2482	2914

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>+100	6	6	20
Sodium	ppm	ASTM D5185m		8	7	5
Potassium	ppm	ASTM D5185m	>20	<1	2	2

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844		0	0	0
Nitration	Abs/cm	*ASTM D7624	>20	11.5	12.8	12.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.3	27.4	24.3

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	21.4	23.2	21.5
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	4.7	2.6	4.1





OIL ANALYSIS REPORT

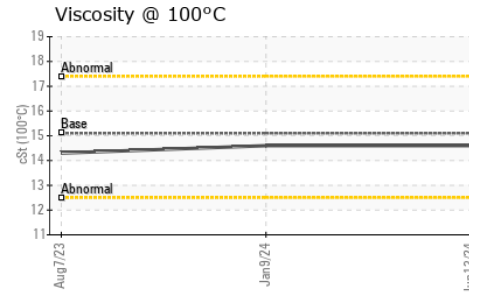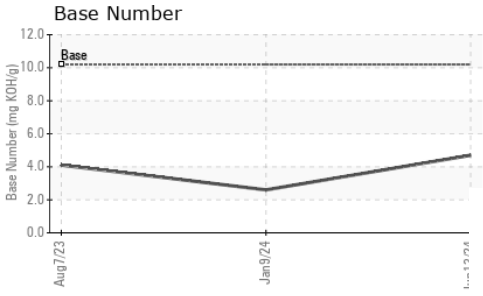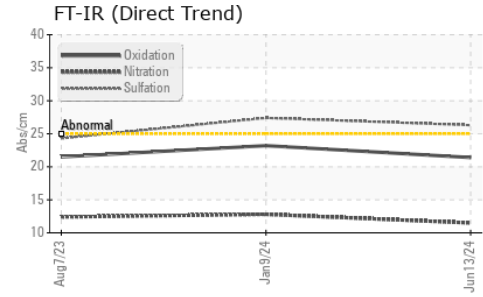

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.6	14.3

GRAPHS

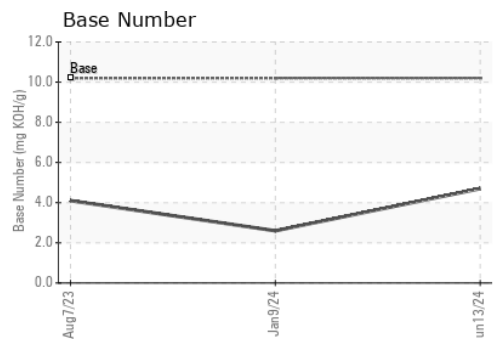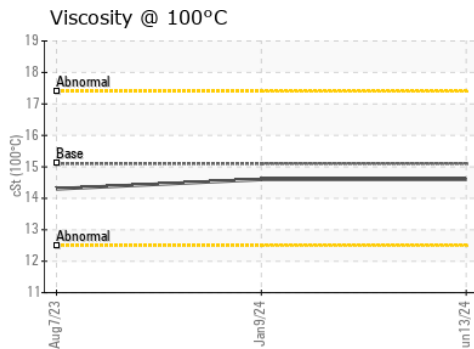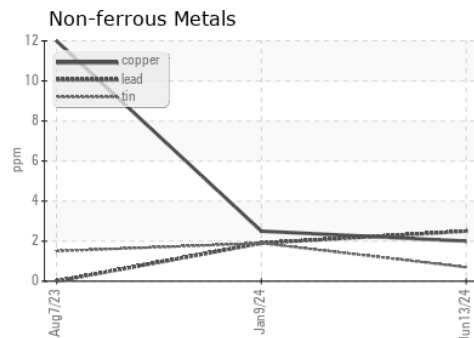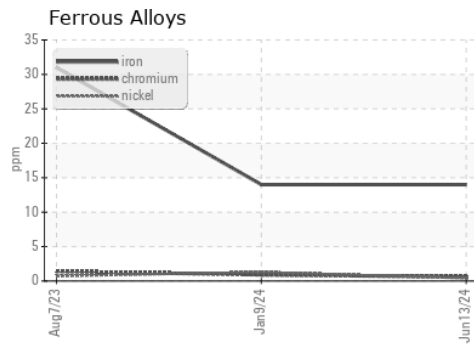

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0124218 **Received** : 17 Jun 2024
Lab Number : 06211239 **Tested** : 18 Jun 2024
Unique Number : 11084103 **Diagnosed** : 18 Jun 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 002 - Vance-Granville
 241 Vanco Mill Rd
 Henderson, NC
 US 27537
 Contact: Cameron King
 cameron.king@gflenv.com
 T: (252)438-5333
 F: (252)431-1635

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)