


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / HULBERT**  
 Machine Id  
**WL131**  
 Component  
**Rear Left Final Drive**  
 Fluid  
**MOBIL MOBILTRANS HD 50 (--- GAL)**

### Sample Rating Trend

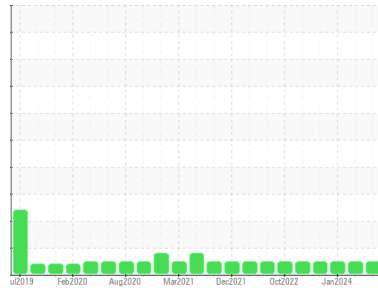

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0085968</b>	PCA0085915	PCA0109185
Sample Date	Client Info		<b>07 Jun 2024</b>	06 Apr 2024	27 Jan 2024
Machine Age	hrs	Client Info	<b>11670</b>	11256	10805
Oil Age	hrs	Client Info	<b>500</b>	0	0
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	<b>13</b>	70	97
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >75	<b>2</b>	3	2
Lead	ppm	ASTM D5185m >10	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >75	<b>&lt;1</b>	4	5
Tin	ppm	ASTM D5185m >8	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>18</b>	9	16
Barium	ppm	ASTM D5185m	<b>0</b>	<1	5
Molybdenum	ppm	ASTM D5185m	<b>4</b>	2	2
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	1	0
Magnesium	ppm	ASTM D5185m	<b>40</b>	33	47
Calcium	ppm	ASTM D5185m	<b>3317</b>	3426	4845
Phosphorus	ppm	ASTM D5185m	<b>897</b>	1056	1500
Zinc	ppm	ASTM D5185m	<b>1141</b>	1315	1893
Sulfur	ppm	ASTM D5185m	<b>5909</b>	5042	7920


## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	<b>13</b>	16	23
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	2

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual NONE	<b>NONE</b>	LIGHT	NONE
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	<b>NEG</b>	NEG	NEG
Free Water	scalar	*Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT

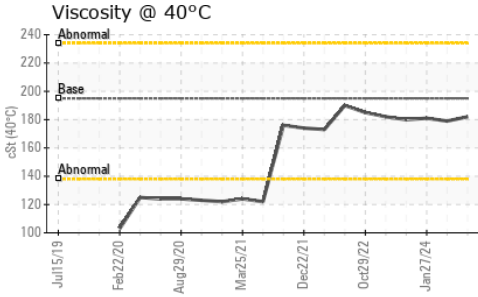









## FLUID PROPERTIES

method	limit/base	current	history1	history2	
Visc @ 40°C	cSt ASTM D445	195	182	179	181

## SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

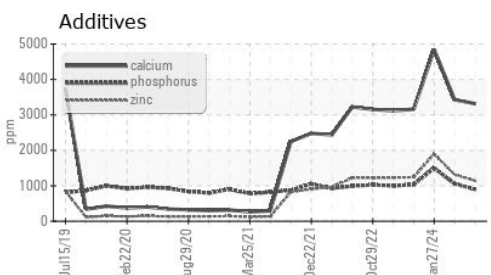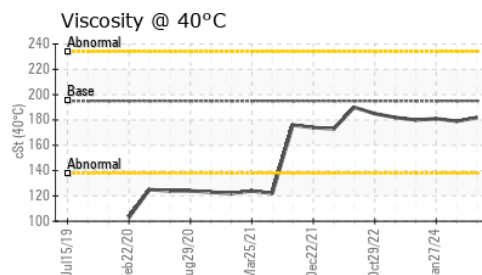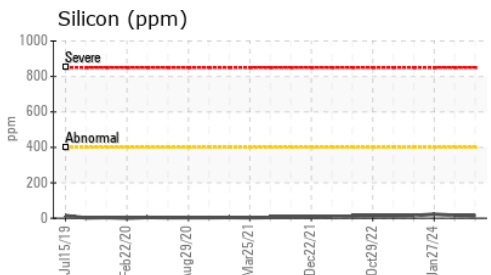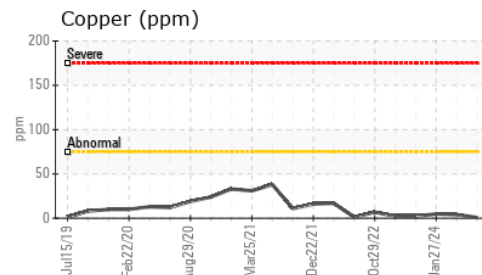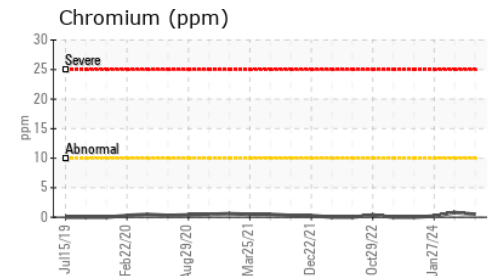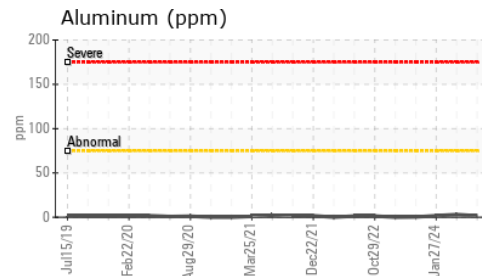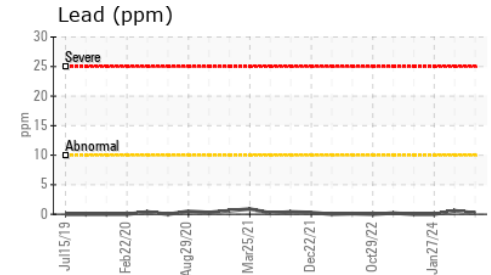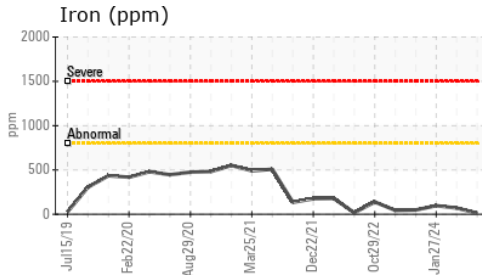

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0085968  
**Lab Number** : 06212125  
**Unique Number** : 11084989  
**Test Package** : MOB 1

**Received** : 17 Jun 2024  
**Tested** : 18 Jun 2024  
**Diagnosed** : 18 Jun 2024 - Wes Davis

**Kemp Quarries - Kemp Stone - Hulbert**  
 17801 Hwy 80  
 Hulbert, OK  
 US 74441  
 Contact:  
 hulbert@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: