


OIL ANALYSIS REPORT



Area
KEMP QUARRIES / HULBERT
 Machine Id
WL131
 Component
Front Right Final Drive
 Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

Sample Rating Trend

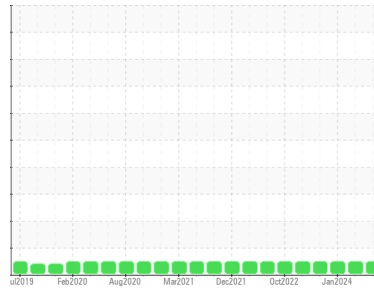

NORMAL

✓

DIAGNOSIS

- Recommendation**
 Resample at the next service interval to monitor.
- Wear**
 All component wear rates are normal.
- Contamination**
 There is no indication of any contamination in the oil.
- Fluid Condition**
 The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0085941	PCA0085918	PCA0109159
Sample Date	Client Info		07 Jun 2024	06 Apr 2024	27 Jan 2024
Machine Age	hrs	Client Info	11670	11256	10805
Oil Age	hrs	Client Info	500	0	0
Oil Changed	Client Info		Not Chngd	Changed	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>800	80	697	275
Chromium	ppm	ASTM D5185m	>10	<1	2	<1
Nickel	ppm	ASTM D5185m	>5	<1	<1	0
Titanium	ppm	ASTM D5185m	>15	<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>75	2	7	2
Lead	ppm	ASTM D5185m	>10	<1	1	0
Copper	ppm	ASTM D5185m	>75	1	8	3
Tin	ppm	ASTM D5185m	>8	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		6	6	4
Barium	ppm	ASTM D5185m		0	<1	5
Molybdenum	ppm	ASTM D5185m		4	3	<1
Manganese	ppm	ASTM D5185m		<1	6	<1
Magnesium	ppm	ASTM D5185m		40	48	31
Calcium	ppm	ASTM D5185m		3388	4906	3293
Phosphorus	ppm	ASTM D5185m		858	1509	1060
Zinc	ppm	ASTM D5185m		1145	1885	1210
Sulfur	ppm	ASTM D5185m		4833	6802	5116


CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>400	17	60	33
Sodium	ppm	ASTM D5185m		0	4	0
Potassium	ppm	ASTM D5185m	>20	1	3	2

VISUAL

	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG

OIL ANALYSIS REPORT







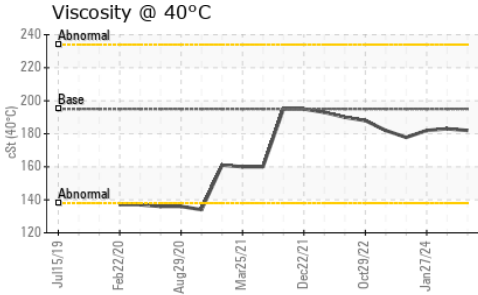


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	195	182	183	182

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

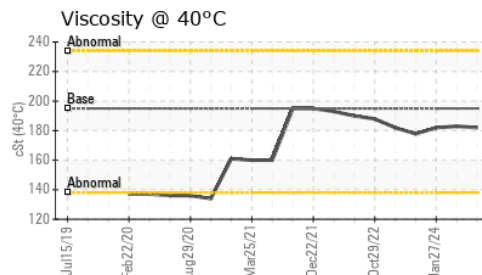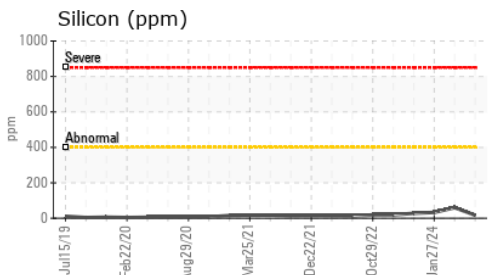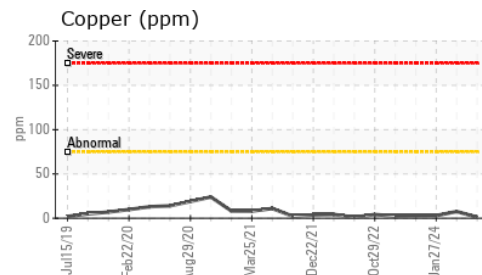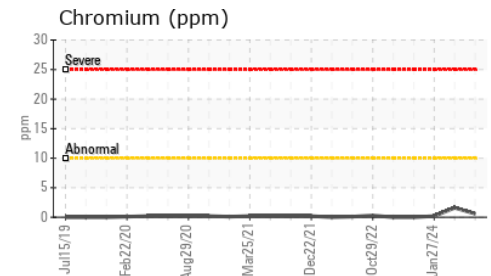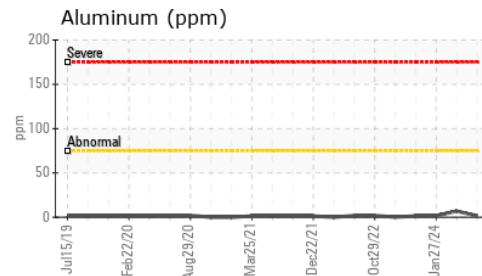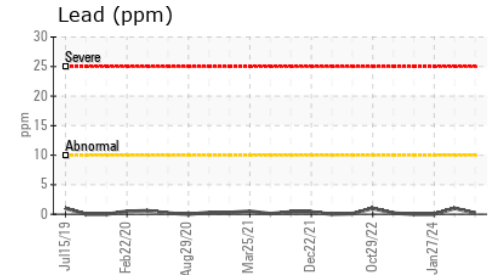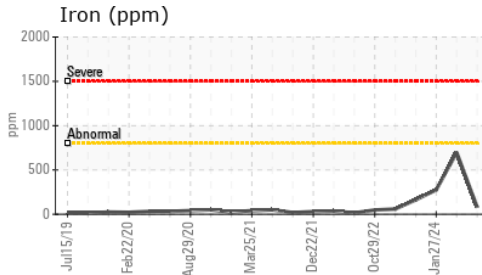

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0085941
Lab Number : **06212126**
Unique Number : 11084990
Test Package : MOB 1 (Additional Tests: PQ)

Received : 17 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Don Baldrige

Kemp Quarries - Kemp Stone - Hulbert
 17801 Hwy 80
 Hulbert, OK
 US 74441
 Contact:
 hulbert@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: