


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

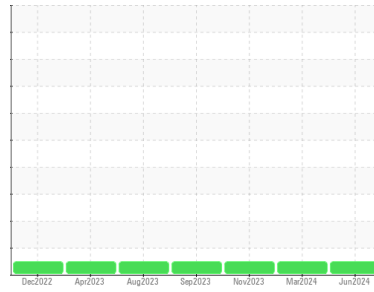

Area  
**(89669X) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A69090**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0128597</b>	PCA0118730	PCA0112884
Sample Date	Client Info		<b>12 Jun 2024</b>	11 Mar 2024	30 Nov 2023
Machine Age	mls	Client Info	<b>649364</b>	617738	588304
Oil Age	mls	Client Info	<b>31626</b>	59127	29693
Oil Changed	Client Info		<b>Not Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>16</b>	32	15
Chromium	ppm	ASTM D5185m >5	<b>1</b>	2	1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >30	<b>8</b>	17	9
Lead	ppm	ASTM D5185m >30	<b>0</b>	2	0
Copper	ppm	ASTM D5185m >150	<b>3</b>	4	3
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	2	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>5</b>	<1	1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>61</b>	57	57
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 950	<b>962</b>	987	896
Calcium	ppm	ASTM D5185m 1050	<b>1125</b>	1143	1016
Phosphorus	ppm	ASTM D5185m 995	<b>1069</b>	1029	983
Zinc	ppm	ASTM D5185m 1180	<b>1286</b>	1303	1220
Sulfur	ppm	ASTM D5185m 2600	<b>3309</b>	3182	2747

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>4</b>	5	3
Sodium	ppm	ASTM D5185m	<b>3</b>	3	3
Potassium	ppm	ASTM D5185m >20	<b>3</b>	3	1




### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	1	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.1</b>	10.9	8.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>21.1</b>	24.5	20.4

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>17.5</b>	21.4	17.1
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.0</b>	4.4	6.6





# OIL ANALYSIS REPORT

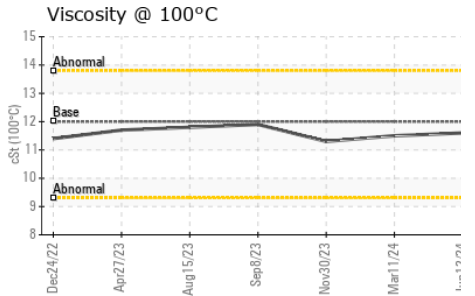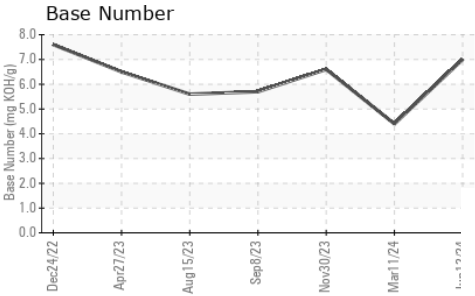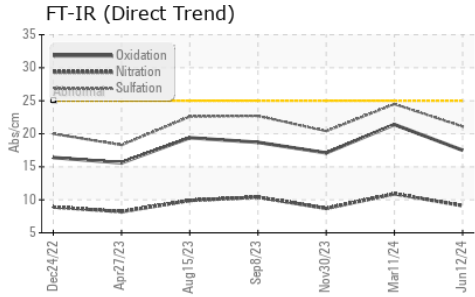

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 12.00	<b>11.6</b>	11.5	11.3

## GRAPHS

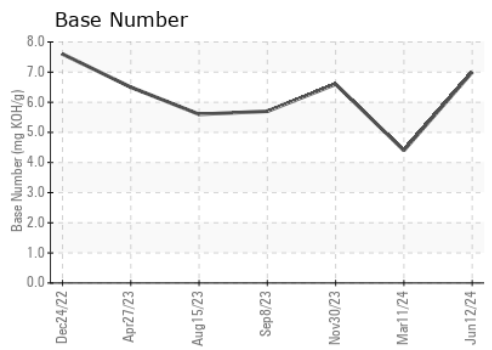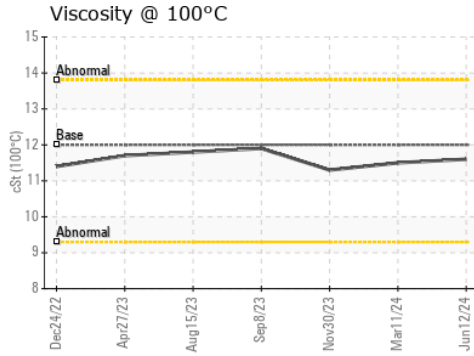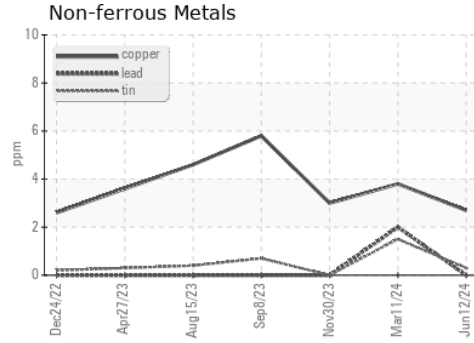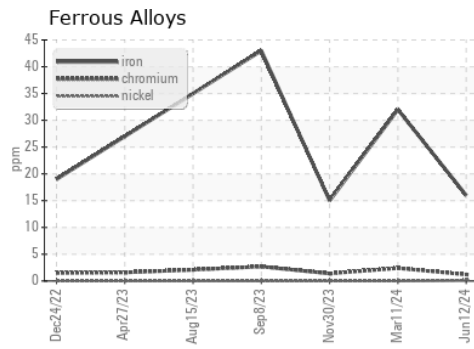

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0128597      **Received** : 17 Jun 2024  
**Lab Number** : **06212734**      **Tested** : 19 Jun 2024  
**Unique Number** : 11085598      **Diagnosed** : 19 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1364 - Berkeley-Mt. Vernon**  
 5100 Lake Terrace NE  
 Mt. Vernon, IL  
 US 62864  
 Contact: Erien White  
 ewhite@transervice.com  
 T: (618)244-8726  
 F: (618)244-8791

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)