




# OIL ANALYSIS REPORT

Sample Rating Trend

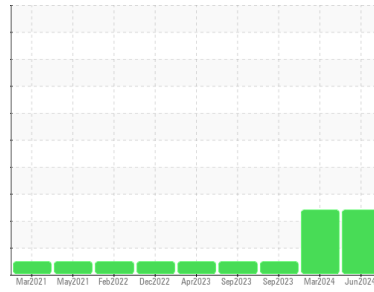

GLYCOL



Machine Id  
**528009-1133**

Component  
**Diesel Engine**

Fluid  
**CHEVRON DELO 400 XLE 15W40 (10 GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0104675</b>	GFL0096232	GFL0064413
Sample Date	Client Info	<b>12 Jun 2024</b>	07 Mar 2024	27 Sep 2023
Machine Age	hrs	<b>14641</b>	14364	13675
Oil Age	hrs	<b>13675</b>	0	612
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	Changed
Sample Status		<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	<b>17</b>	42	61
Chromium	ppm ASTM D5185m >20	<b>1</b>	3	7
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m	<b>6</b>	9	4
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>3</b>	4	4
Lead	ppm ASTM D5185m >40	<b>4</b>	29	25
Copper	ppm ASTM D5185m >330	<b>1</b>	1	2
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>52</b>	25	50
Barium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>75</b>	93	90
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m	<b>518</b>	757	613
Calcium	ppm ASTM D5185m	<b>1455</b>	1678	1463
Phosphorus	ppm ASTM D5185m 760	<b>964</b>	792	735
Zinc	ppm ASTM D5185m 830	<b>1047</b>	922	792
Sulfur	ppm ASTM D5185m 2770	<b>2998</b>	3254	2820

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>7</b>	7	7
Sodium	ppm ASTM D5185m	<b>▲ 120</b>	▲ 164	15
Potassium	ppm ASTM D5185m >20	<b>▲ 38</b>	▲ 20	4
Glycol	% *ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.4</b>	0.6	0.9
Nitration	Abs/cm *ASTM D7624 >20	<b>9.9</b>	12.8	11.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.5</b>	26.7	27.8


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>16.7</b>	22.5	24.2
Base Number (BN)	mg KOH/g ASTM D2896 10.7	<b>6.5</b>	5.7	5.5




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

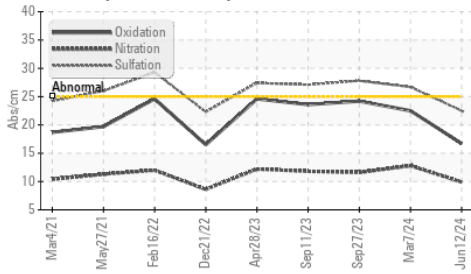


Glycol Contamination

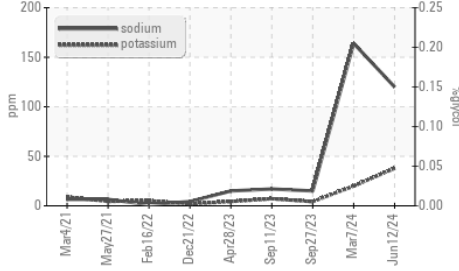

Viscosity @ 100°C

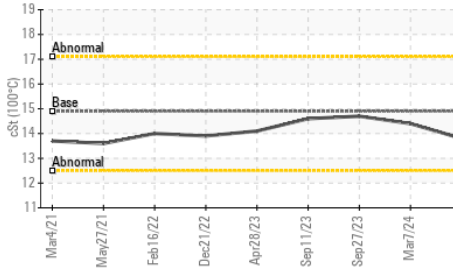

Glycol Contamination

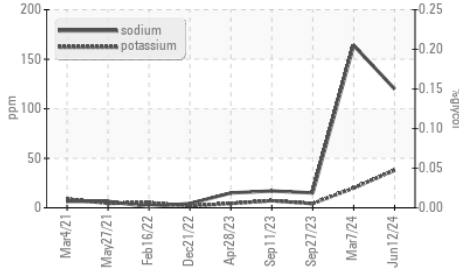


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.9	13.8	14.4

## GRAPHS


Ferrous Alloys

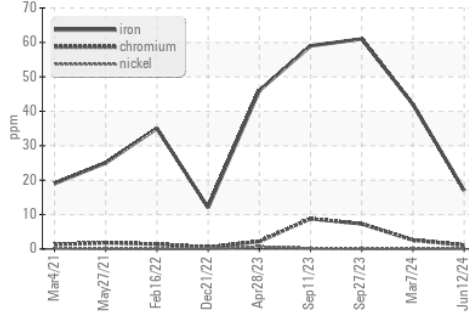


Non-ferrous Metals

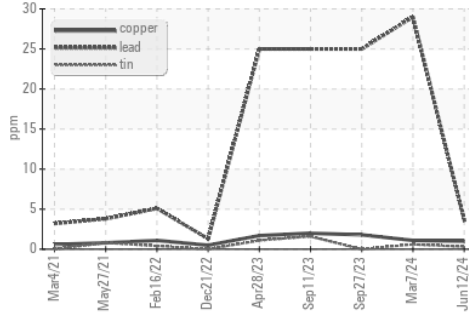

Viscosity @ 100°C

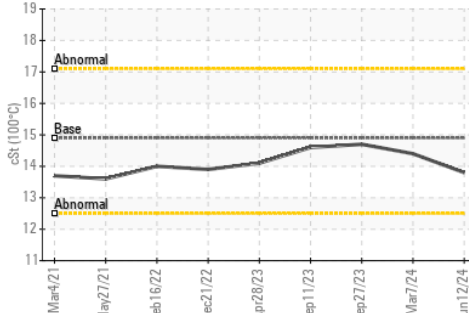

Base Number

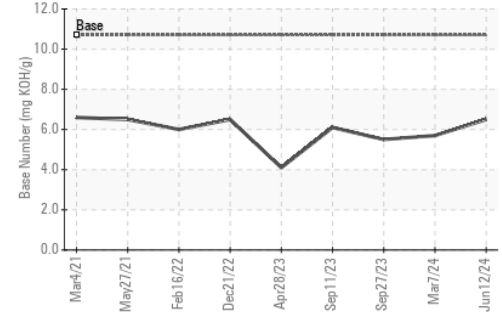

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0104675  
 Lab Number : 06212919  
 Unique Number : 11085783  
 Test Package : FLEET ( Additional Tests: Glycol )  
 Received : 17 Jun 2024  
 Tested : 19 Jun 2024  
 Diagnosed : 19 Jun 2024 - Angela Borella

GFL Environmental - 624 - Elmira Hauling  
 10164 M-32  
 Elmira, MI  
 US 49730

Contact: KEITH CAMPBELL  
 kcampbell@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)