




# OIL ANALYSIS REPORT

Sample Rating Trend

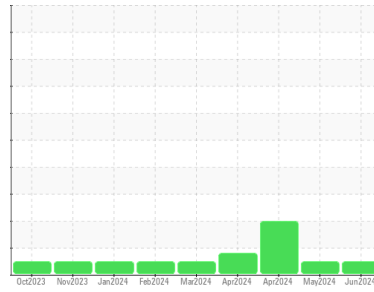

**NORMAL**



Machine Id  
**834051**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122936</b>	GFL0118831	GFL0118815
Sample Date	Client Info		<b>11 Jun 2024</b>	17 May 2024	26 Apr 2024
Machine Age	hrs	Client Info	<b>1580</b>	1459	1309
Oil Age	hrs	Client Info	<b>1291</b>	1320	1170
Oil Changed	Client Info		<b>Not Chngd</b>	N/A	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>16</b>	12	11
Chromium	ppm	ASTM D5185m >5	<b>1</b>	<1	0
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	2	1
Lead	ppm	ASTM D5185m >40	<b>2</b>	<1	0
Copper	ppm	ASTM D5185m >150	<b>3</b>	3	0
Tin	ppm	ASTM D5185m >4	<b>1</b>	1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	<b>11</b>	25	31
Barium	ppm	ASTM D5185m 5	<b>&lt;1</b>	0	<1
Molybdenum	ppm	ASTM D5185m 50	<b>55</b>	52	49
Manganese	ppm	ASTM D5185m 0	<b>2</b>	2	1
Magnesium	ppm	ASTM D5185m 560	<b>605</b>	625	599
Calcium	ppm	ASTM D5185m 1510	<b>1606</b>	1576	1508
Phosphorus	ppm	ASTM D5185m 780	<b>844</b>	819	754
Zinc	ppm	ASTM D5185m 870	<b>1011</b>	976	915
Sulfur	ppm	ASTM D5185m 2040	<b>2738</b>	2877	2691

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	6	5
Sodium	ppm	ASTM D5185m	<b>7</b>	6	4
Potassium	ppm	ASTM D5185m >20	<b>3</b>	2	<1

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0.1</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.3</b>	9.5	8.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.8</b>	19.8	19.3


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>18.2</b>	17.3	16.9
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>5.5</b>	6.8	7.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

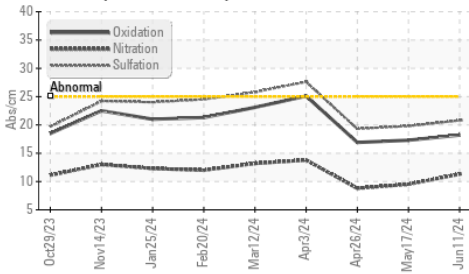

Base Number

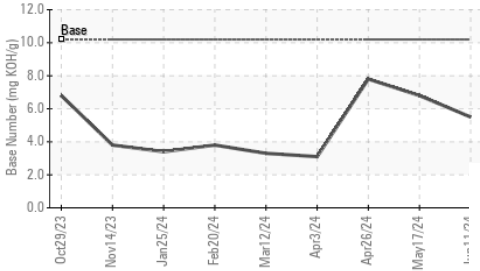

Viscosity @ 100°C

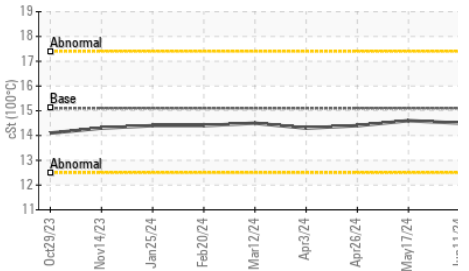


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	▲ MODER
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	0.2%
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.5	14.6

## GRAPHS


Ferrous Alloys

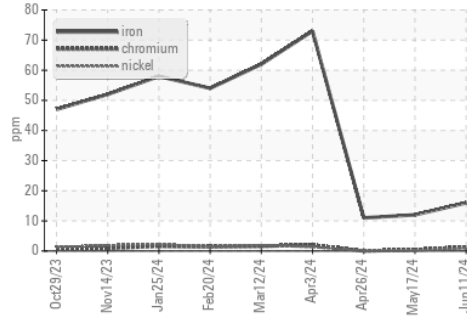


Non-ferrous Metals

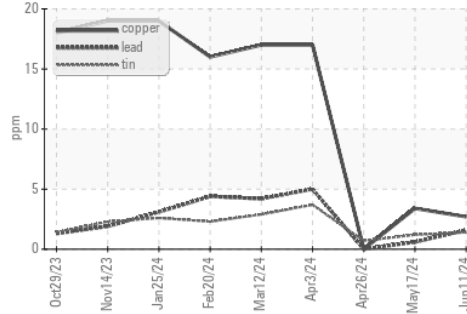

Viscosity @ 100°C

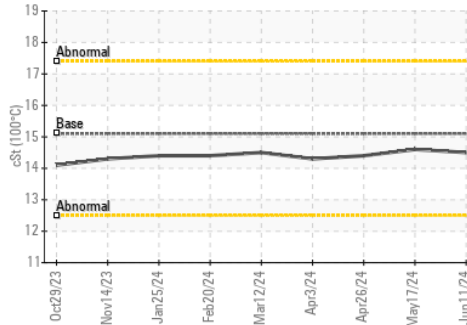

Base Number

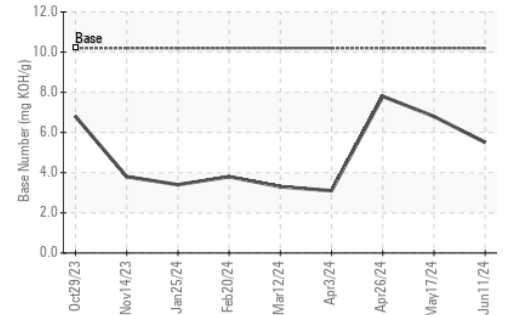

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0122936  
**Lab Number** : 06212975  
**Unique Number** : 11085839  
**Test Package** : FLEET

**Received** : 17 Jun 2024  
**Tested** : 19 Jun 2024  
**Diagnosed** : 19 Jun 2024 - Wes Davis

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: Robert Hart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (580)461-1509

F: