




# OIL ANALYSIS REPORT

## Sample Rating Trend

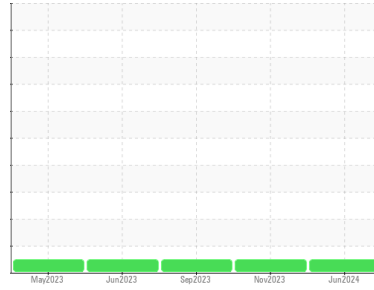

**NORMAL**



Machine Id  
**427184 - SW4724**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: Engine )

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0123528</b>	GFL0094126	GFL0089403
Sample Date	Client Info		<b>12 Jun 2024</b>	16 Nov 2023	06 Sep 2023
Machine Age	mls	Client Info	<b>358831</b>	363621	336922
Oil Age	mls	Client Info	<b>358831</b>	363621	336922
Oil Changed	Client Info		<b>Changed</b>	N/A	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>2</b>	6	10
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	1	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	1	3
Copper	ppm	ASTM D5185m >330	<b>0</b>	<1	1
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	2
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	<1

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>0</b>	0	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	44
Molybdenum	ppm	ASTM D5185m 60	<b>49</b>	43	42
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>20</b>	30	29
Calcium	ppm	ASTM D5185m 1070	<b>2704</b>	2381	2188
Phosphorus	ppm	ASTM D5185m 1150	<b>1095</b>	1096	1017
Zinc	ppm	ASTM D5185m 1270	<b>1338</b>	1193	1231
Sulfur	ppm	ASTM D5185m 2060	<b>3721</b>	2871	3475

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	6	8
Sodium	ppm	ASTM D5185m	<b>2</b>	2	3
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	4

### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.5</b>	9.0	9.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.9</b>	20.4	19.8


### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>10.4</b>	12.2	12.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>5.9</b>	6.5	6.0




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

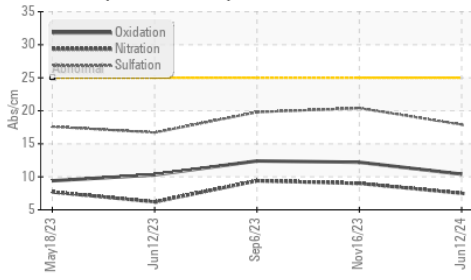

Base Number

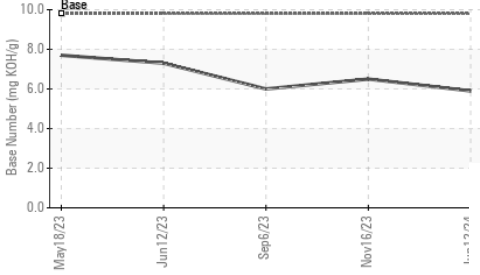

Viscosity @ 100°C

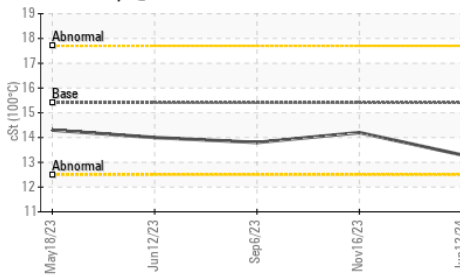


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	14.2

## GRAPHS


Ferrous Alloys

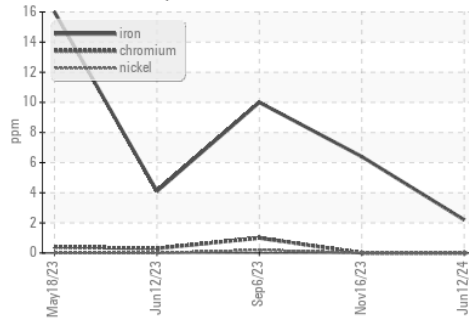


Non-ferrous Metals

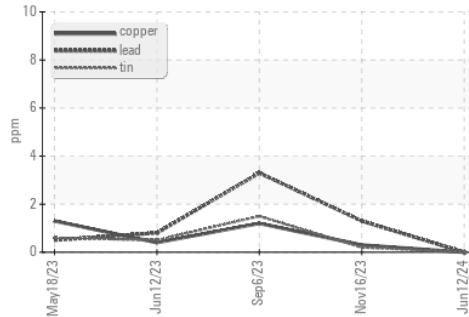

Viscosity @ 100°C

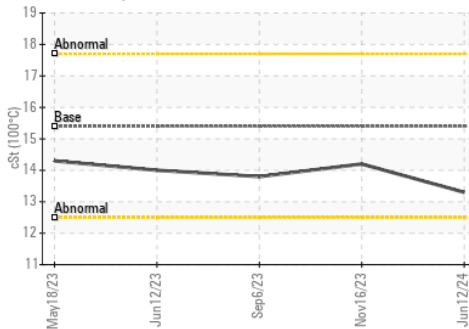

Base Number

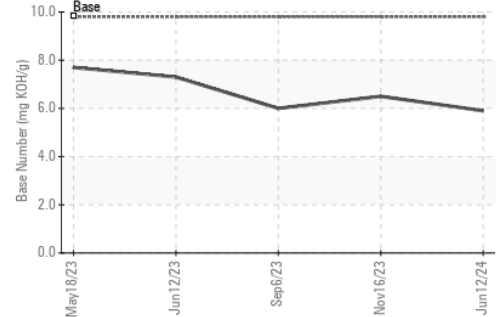

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0123528  
 Lab Number : 06213214  
 Unique Number : 11086078  
 Test Package : FLEET

Received : 18 Jun 2024  
 Tested : 19 Jun 2024  
 Diagnosed : 20 Jun 2024 - Don Baldrige

GFL Environmental - 983 - Sugar Land Hauling  
 16011 West Belfort Street  
 Sugar Land, TX  
 US 77498

Contact: Adrian Martinez  
 adrianmartinez@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: