




# OIL ANALYSIS REPORT

## Sample Rating Trend

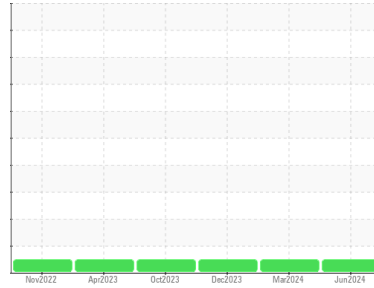

**NORMAL**



Machine Id  
**222027-995**

Component  
**Diesel Engine**

Fluid  
**DISEL ENGINE OIL (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>GFL0122081</b>	GFL0111901	GFL0098227
Sample Date	Client Info			<b>14 Jun 2024</b>	19 Mar 2024	26 Dec 2023
Machine Age	mls Client Info			<b>196076</b>	191584	188090
Oil Age	mls Client Info			<b>196076</b>	191584	188090
Oil Changed	Client Info			<b>Changed</b>	Not Changd	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>11</b>	9	18
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>1</b>	1	1
Aluminum	ppm	ASTM D5185m	>20	<b>6</b>	7	7
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	3	0
Copper	ppm	ASTM D5185m	>330	<b>2</b>	2	2
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	2	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>10</b>	14	4
Barium	ppm	ASTM D5185m		<b>0</b>	1	0
Molybdenum	ppm	ASTM D5185m		<b>59</b>	59	59
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>960</b>	935	954
Calcium	ppm	ASTM D5185m		<b>1164</b>	1192	1062
Phosphorus	ppm	ASTM D5185m		<b>1158</b>	1157	1021
Zinc	ppm	ASTM D5185m		<b>1312</b>	1261	1256
Sulfur	ppm	ASTM D5185m		<b>3929</b>	3488	2990




CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	9	6
Sodium	ppm	ASTM D5185m	>75	<b>4</b>	0	2
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	4	0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.7</b>	0.4	0.9
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.2</b>	7.6	11.0
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.3</b>	18.2	19.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.7</b>	14.9	17.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>8.3</b>	8.9	8.4







# OIL ANALYSIS REPORT

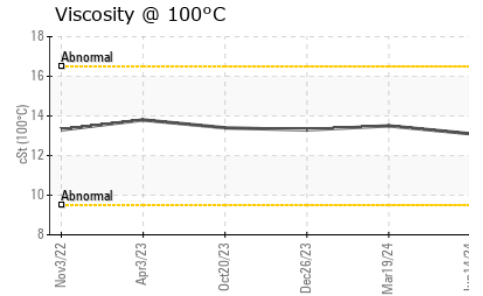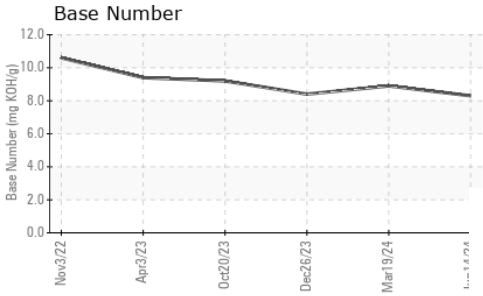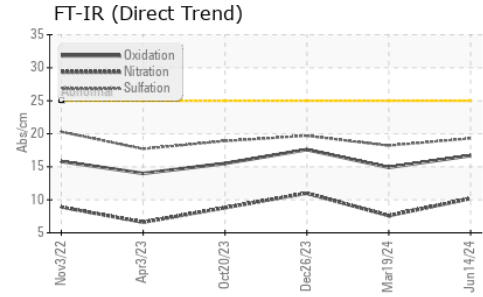

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.1	13.5	13.3

## GRAPHS

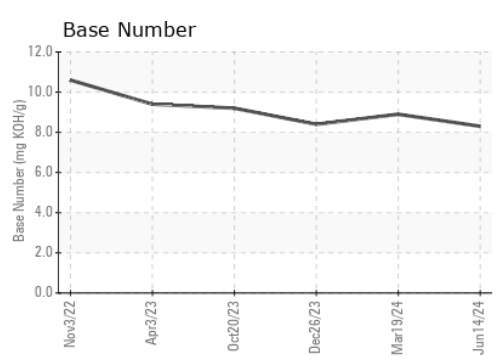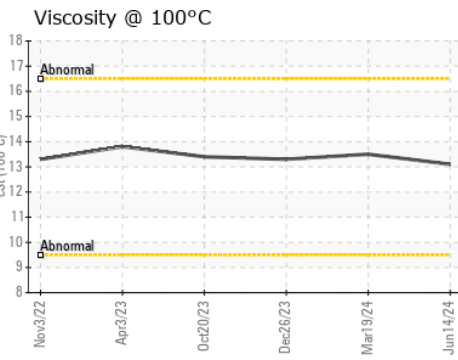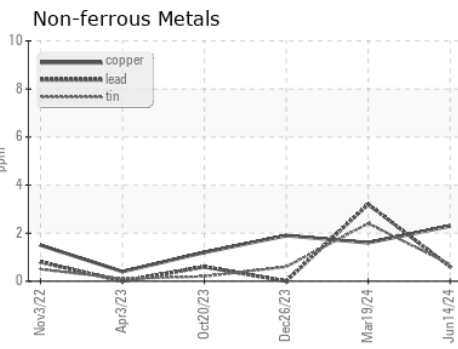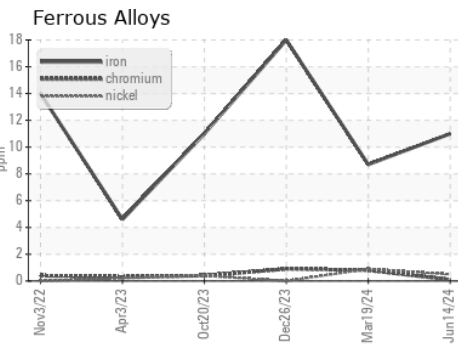

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0122081      **Received** : 18 Jun 2024  
**Lab Number** : 06213256      **Tested** : 19 Jun 2024  
**Unique Number** : 11086120      **Diagnosed** : 20 Jun 2024 - Sean Felton  
**Test Package** : FLEET

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)