




# OIL ANALYSIS REPORT

Sample Rating Trend

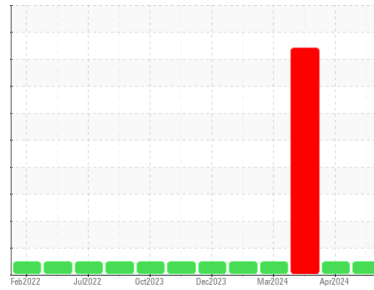

**NORMAL**



Area  
**(48009UA)**  
Machine Id  
**720052**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0122082</b>	GFL0111912	GFL0111871
Sample Date	Client Info		<b>14 Jun 2024</b>	18 Apr 2024	27 Mar 2024
Machine Age	hrs	Client Info	<b>6269</b>	5870	5690
Oil Age	hrs	Client Info	<b>2699</b>	2480	2590
Oil Changed	Client Info		<b>Changed</b>	Not Changd	Not Changd
Sample Status			<b>NORMAL</b>	NORMAL	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	▲ 0.10

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>30</b>	11	19
Chromium	ppm	ASTM D5185m >5	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	<1
Aluminum	ppm	ASTM D5185m >30	<b>4</b>	2	6
Lead	ppm	ASTM D5185m >30	<b>0</b>	<1	1
Copper	ppm	ASTM D5185m >150	<b>2</b>	1	9
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>10</b>	12	11
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	63	100
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>935</b>	906	800
Calcium	ppm	ASTM D5185m 1070	<b>1138</b>	1130	1027
Phosphorus	ppm	ASTM D5185m 1150	<b>1083</b>	1023	944
Zinc	ppm	ASTM D5185m 1270	<b>1265</b>	1212	1109
Sulfur	ppm	ASTM D5185m 2060	<b>3537</b>	3219	3020

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>7</b>	6	18
Sodium	ppm	ASTM D5185m	<b>8</b>	4	▲ 59
Potassium	ppm	ASTM D5185m >20	<b>5</b>	3	▲ 472

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.8</b>	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.2</b>	7.1	4.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.6</b>	19.0	16.9

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.1</b>	14.8	12.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.4</b>	8.0	9.1







# OIL ANALYSIS REPORT

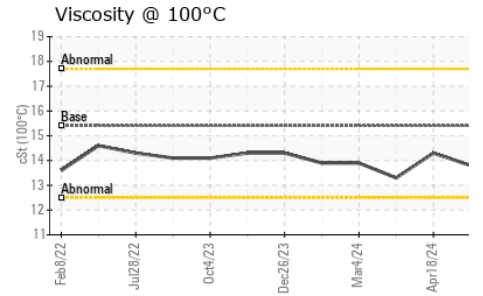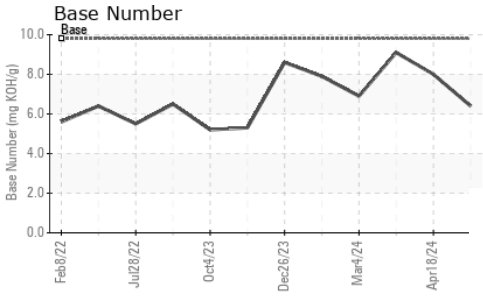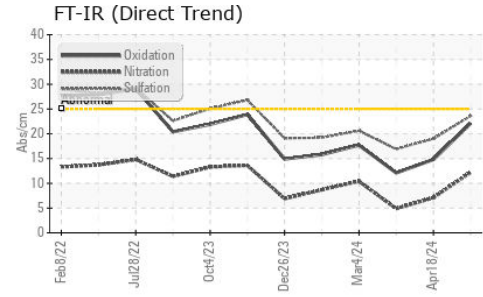

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	14.3

## GRAPHS

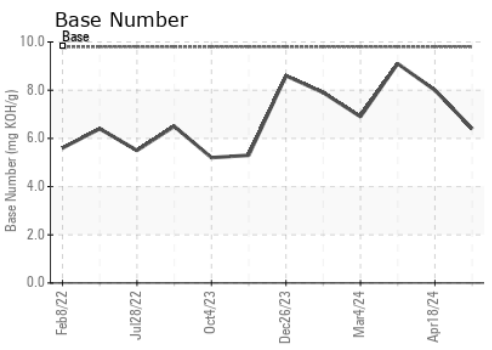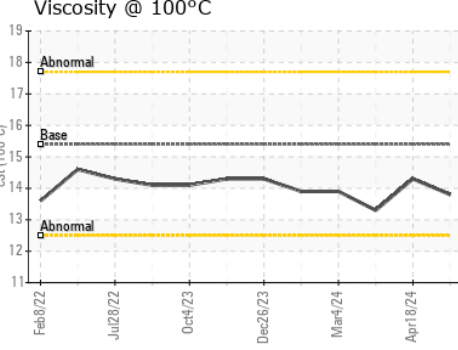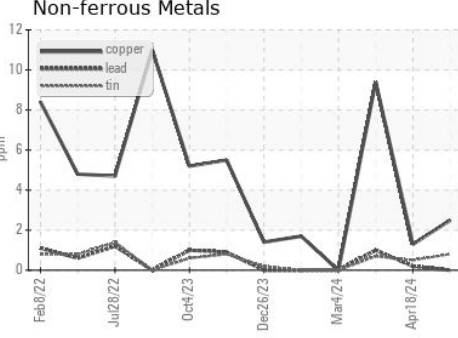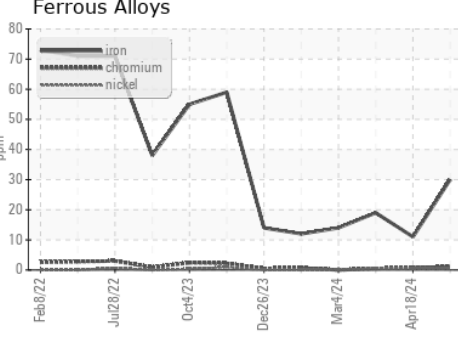

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0122082      **Received** : 18 Jun 2024  
**Lab Number** : 06213257      **Tested** : 19 Jun 2024  
**Unique Number** : 11086121      **Diagnosed** : 19 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)