




PROBLEM SUMMARY

Sample Rating Trend


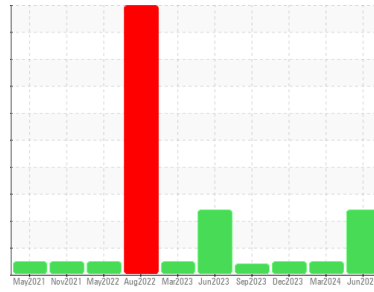


FUEL



Machine Id
4706M
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

COMPONENT CONDITION SUMMARY

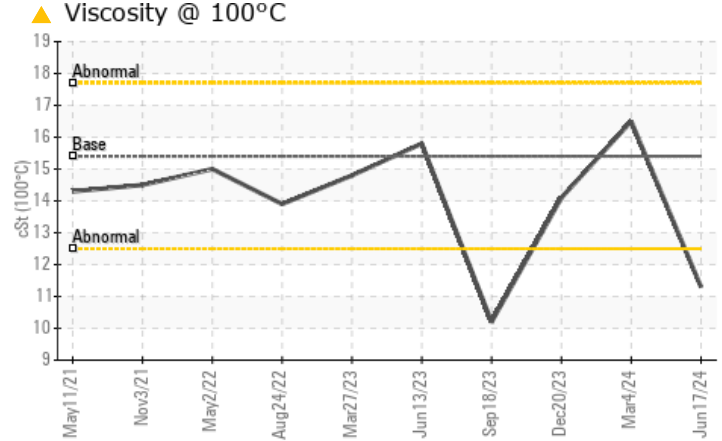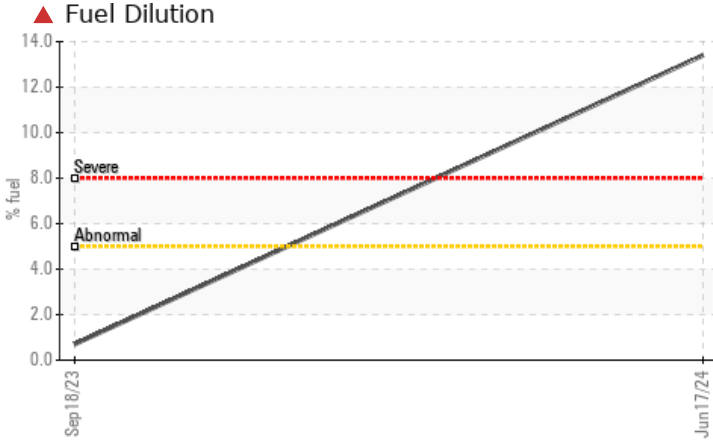

RECOMMENDATION

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	NORMAL	NORMAL
Fuel	%	ASTM D3524	>5	▲ 13.4	<1.0	<1.0
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.3	16.5	14.1

Customer Id: GFL465
 Sample No.: GFL0107036
 Lab Number: 06213266
 Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
 Wes Davis +1 905-569-8600 x223
wesd@wearcheck.ca

To change component or sample information:
 Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Fuel/injector System	---	---	?	We advise that you check the fuel injection system.

HISTORICAL DIAGNOSIS

NORMAL



04 Mar 2024 Diag: Don Baldrige

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



NORMAL



20 Dec 2023 Diag: Wes Davis

Resample at the next service interval to monitor. All component wear rates are normal. There is no indication of any contamination in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

view report



VISCOSITY



18 Sep 2023 Diag: Jonathan Hester

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. All component wear rates are normal. Fuel content negligible. There is no indication of any contamination in the oil. The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.


view report





OIL ANALYSIS REPORT

Sample Rating Trend

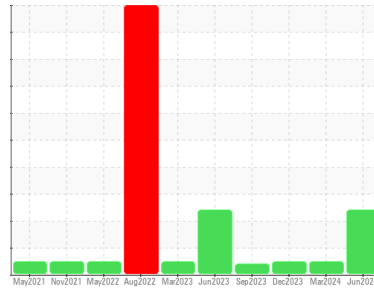

FUEL



Machine Id
4706M
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation
 We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0107036	GFL0107809	GFL0107049
Sample Date	Client Info	17 Jun 2024	04 Mar 2024	20 Dec 2023
Machine Age	hrs	9986	10828	10654
Oil Age	hrs	600	600	600
Oil Changed	Client Info	Changed	Changed	Not Changed
Sample Status		SEVERE	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >80	67	76	27
Chromium	ppm ASTM D5185m >5	2	2	<1
Nickel	ppm ASTM D5185m >2	<1	2	<1
Titanium	ppm ASTM D5185m	<1	<1	0
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >30	8	8	2
Lead	ppm ASTM D5185m >30	0	6	0
Copper	ppm ASTM D5185m >150	6	2	2
Tin	ppm ASTM D5185m >5	<1	<1	<1
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	<1	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	4	5	3
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	49	74	63
Manganese	ppm ASTM D5185m 0	1	<1	<1
Magnesium	ppm ASTM D5185m 1010	801	1332	913
Calcium	ppm ASTM D5185m 1070	883	1461	1081
Phosphorus	ppm ASTM D5185m 1150	899	1287	955
Zinc	ppm ASTM D5185m 1270	1052	1677	1206
Sulfur	ppm ASTM D5185m 2060	2713	3336	2964

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >20	9	12	3
Sodium	ppm ASTM D5185m	39	5	3
Potassium	ppm ASTM D5185m >20	5	6	2
Fuel	% ASTM D3524 >5	▲ 13.4	<1.0	<1.0

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	1.9	0.3	0.8
Nitration	Abs/cm *ASTM D7624 >20	13.4	13.9	9.7
Sulfation	Abs/.1mm *ASTM D7415 >30	25.6	22.6	21.1

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	24.8	23.9	17.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	6.0	11.5	7.7







OIL ANALYSIS REPORT

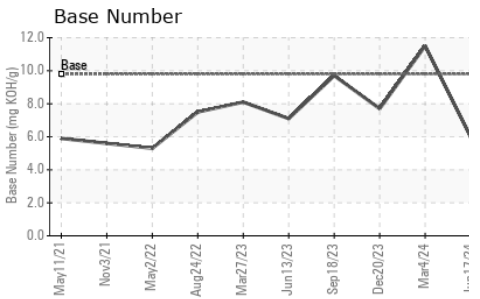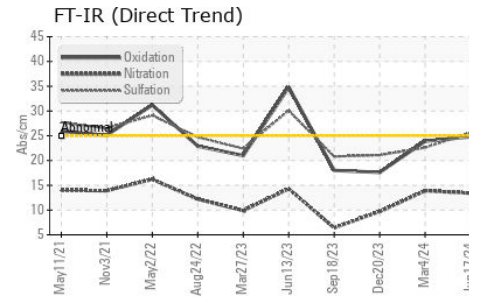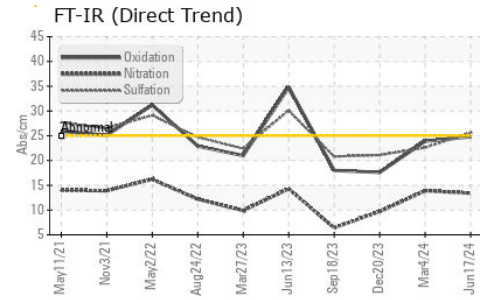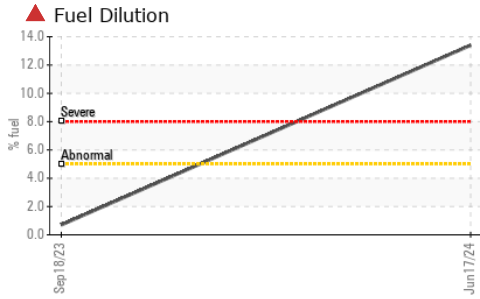

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.3	16.5	14.1

GRAPHS

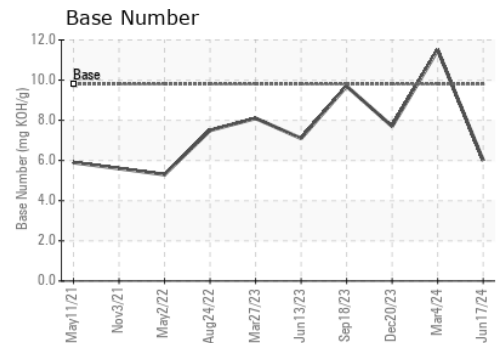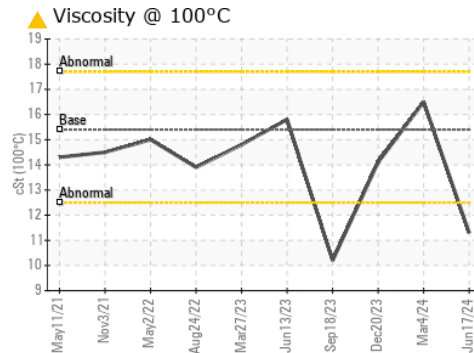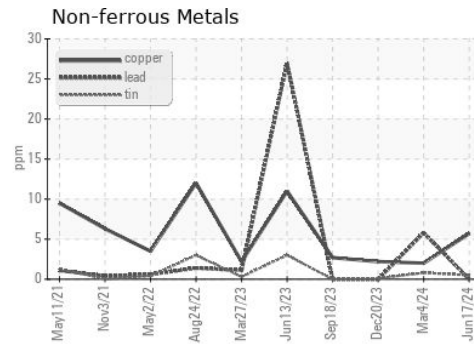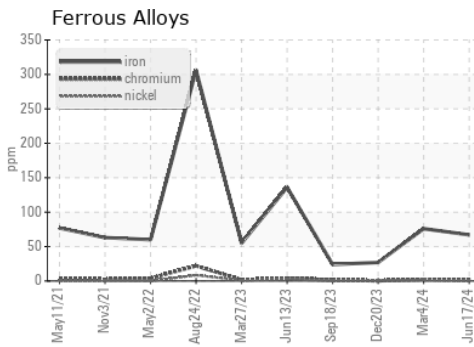

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0107036 **Received** : 18 Jun 2024
Lab Number : 06213266 **Tested** : 20 Jun 2024
Unique Number : 11086130 **Diagnosed** : 20 Jun 2024 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 465 - Pontiac
 888 Baldwin
 Pontiac, MI
 US 48340
 Contact: Ricky Matthews
 rickymathews@gflenv.com
 T: (586)825-9514
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)