


# OIL ANALYSIS REPORT

Sample Rating Trend



ISO

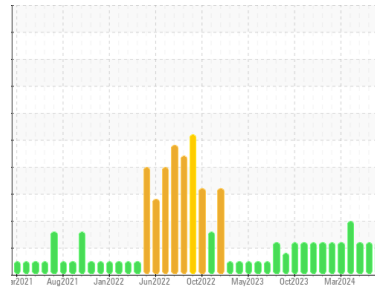

Area

**MIX ROOM C [99062892]**

Machine Id  
**KR-GR-003111 - WEST DUMPER (S/N MIX C - 11513059)**

Component  
**Hydraulic System**

Fluid  
**AW HYDRAULIC OIL ISO 68 (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend you service the filters on this component if applicable. Resample at the next service interval to monitor. ( Customer Sample Comment: 99062892 )

### Wear

All component wear rates are normal.

### Contamination

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0128835</b>	PCA0122284	PCA0114148
Sample Date	Client Info	<b>13 Jun 2024</b>	24 May 2024	17 Apr 2024
Machine Age	hrs	Client Info	0	0
Oil Age	hrs	Client Info	0	0
Oil Changed	Client Info	<b>Not Chngd</b>	N/A	Not Chngd
Sample Status		<b>ABNORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.05	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>20	<b>9</b>	5	5
Chromium	ppm	ASTM D5185m	>20	<b>4</b>	2	1
Nickel	ppm	ASTM D5185m	>20	<b>1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	<1
Lead	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	5	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	5	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	5	<b>&lt;1</b>	<1	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Magnesium	ppm	ASTM D5185m	25	<b>&lt;1</b>	<1	0
Calcium	ppm	ASTM D5185m	200	<b>0</b>	2	2
Phosphorus	ppm	ASTM D5185m	300	<b>353</b>	428	375
Zinc	ppm	ASTM D5185m	370	<b>4</b>	2	0
Sulfur	ppm	ASTM D5185m	2500	<b>440</b>	472	548

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>15	<b>2</b>	2	<1
Sodium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	<1

## FLUID CLEANLINESS


method	limit/base	current	history1	history2	
Particles >4µm	ASTM D7647	>10000	<b>▲ 123135</b>	▲ 209982	▲ 120486
Particles >6µm	ASTM D7647	>2500	<b>▲ 60764</b>	▲ 31629	▲ 33788
Particles >14µm	ASTM D7647	>640	<b>534</b>	216	205
Particles >21µm	ASTM D7647	>160	<b>48</b>	24	10
Particles >38µm	ASTM D7647	>40	<b>2</b>	0	0
Particles >71µm	ASTM D7647	>10	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c)	>20/18/16	<b>▲ 24/23/16</b>	▲ 25/22/15	▲ 24/22/15

## FLUID DEGRADATION


method	limit/base	current	history1	history2		
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.10</b>	0.13	0.11

# OIL ANALYSIS REPORT


## ▲ Particle Trend

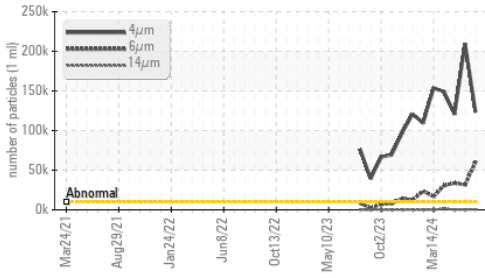


## ▲ Particle Trend

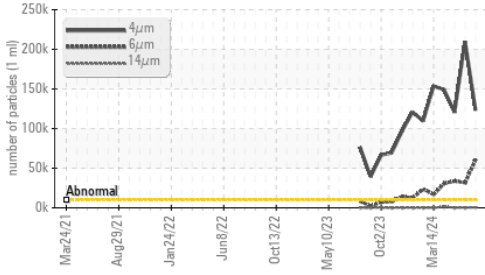

## Acid Number

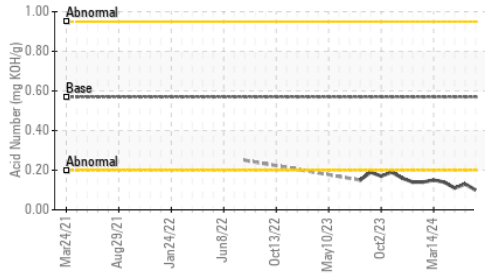

## Viscosity @ 40°C

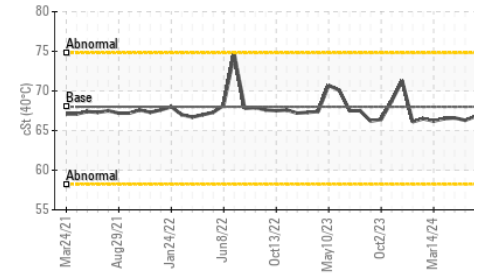


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	68	66.3	66.6

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------


Color

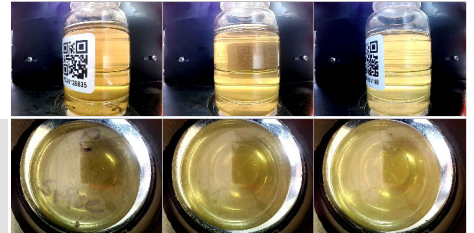


Bottom

## GRAPHS


### Ferrous Alloys

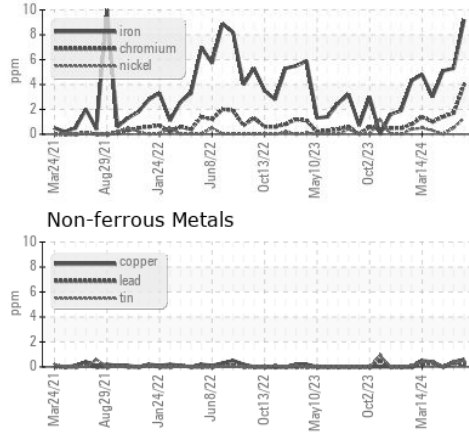


### Non-ferrous Metals

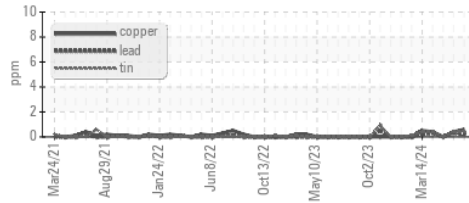


### Viscosity @ 40°C

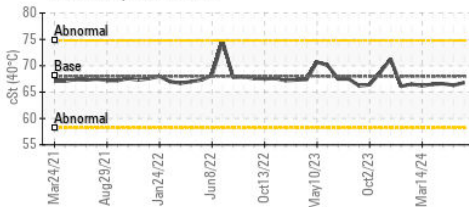

### ▲ Particle Count

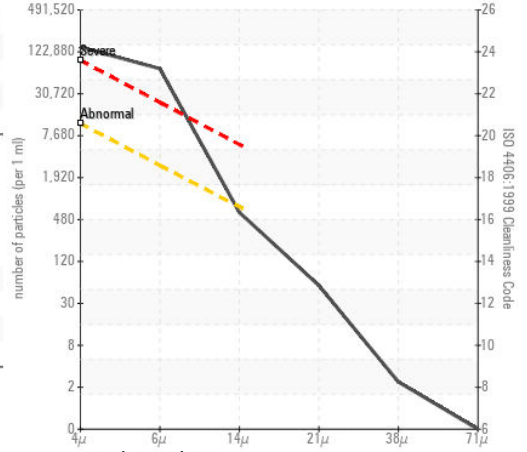

### Acid Number

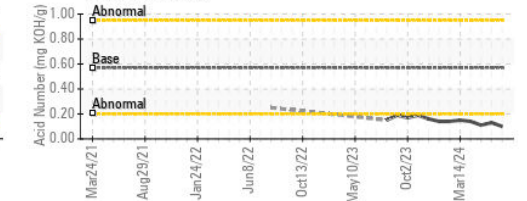

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0128835  
**Lab Number** : 06213443  
**Unique Number** : 11086307  
**Test Package** : IND 2

**Received** : 18 Jun 2024  
**Tested** : 19 Jun 2024  
**Diagnosed** : 20 Jun 2024 - Don Baldrige

**KraftHeinz - Kirksville - Plant 8333 PCA**  
 2504 INDUSTRIAL DR  
 KIRKSVILLE, MO  
 US 63501

Contact: WALLACE WARD  
 wallace.ward@kraftheinzcompany.com

T: (660)627-1031

F: (660)627-5887

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)