


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

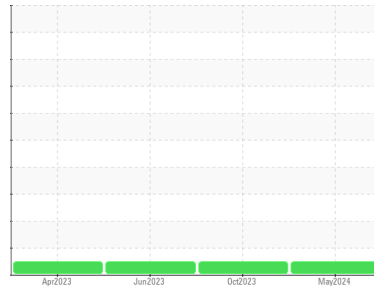

Area  
**(15597Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A61273**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0093620</b>	PCA0103708	PCA0093603
Sample Date	Client Info			<b>07 May 2024</b>	20 Oct 2023	27 Jun 2023
Machine Age	mls	Client Info		<b>396351</b>	413622	319392
Oil Age	mls	Client Info		<b>18932</b>	23122	26260
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>28</b>	18	19
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	2	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>2</b>	9	2
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>30	<b>16</b>	11	11
Lead	ppm	ASTM D5185m	>30	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>150	<b>6</b>	3	5
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>6</b>	4	3
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>51</b>	50	57
Manganese	ppm	ASTM D5185m	0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	950	<b>847</b>	777	927
Calcium	ppm	ASTM D5185m	1050	<b>1290</b>	1194	1209
Phosphorus	ppm	ASTM D5185m	995	<b>1087</b>	900	1014
Zinc	ppm	ASTM D5185m	1180	<b>1261</b>	1253	1265
Sulfur	ppm	ASTM D5185m	2600	<b>3665</b>	2898	3414

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>6</b>	4	4
Sodium	ppm	ASTM D5185m		<b>2</b>	2	2
Potassium	ppm	ASTM D5185m	>20	<b>5</b>	3	3

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.8</b>	0.7	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.9</b>	8.6	8.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.2</b>	21.1	20.4

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>15.9</b>	16.3	17.1
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.7</b>	6.0	7.1





# OIL ANALYSIS REPORT

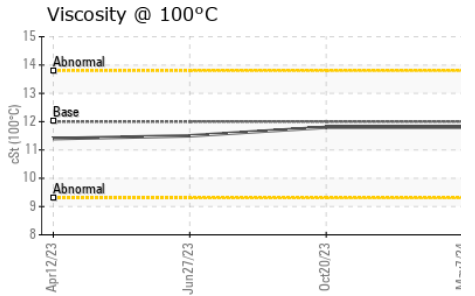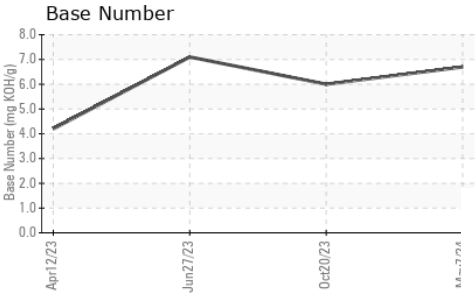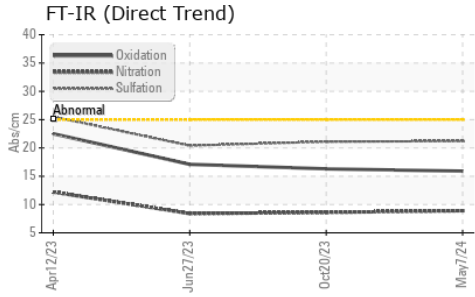

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.8</b>	11.8	11.5

## GRAPHS

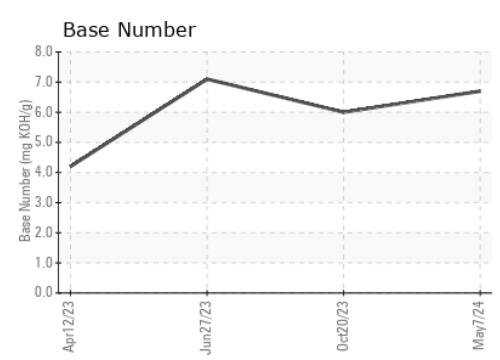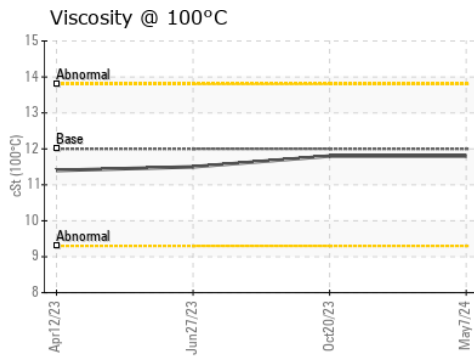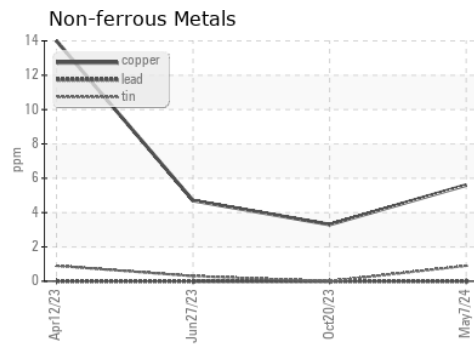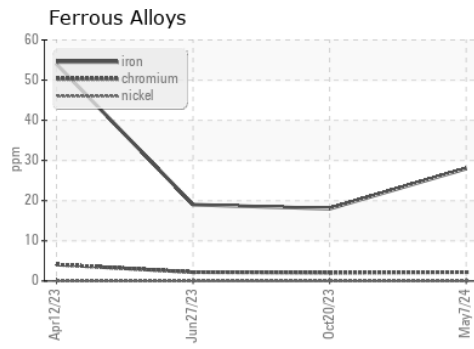

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0093620      **Received** : 18 Jun 2024  
**Lab Number** : **06214125**      **Tested** : 20 Jun 2024  
**Unique Number** : 11086989      **Diagnosed** : 20 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1374 - Berkeley-Hartford**  
 80 International Drive  
 Windsor, CT  
 US 06095  
 Contact: Paul Santanella  
 psantanella@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)