

# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**



Area  
**(74295Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A624370**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0094026</b>	---	---
Sample Date	Client Info		<b>13 Jun 2024</b>	---	---
Machine Age	mls	Client Info	<b>27112</b>	---	---
Oil Age	mls	Client Info	<b>27112</b>	---	---
Oil Changed	Client Info		<b>Not Chngd</b>	---	---
Sample Status			<b>NORMAL</b>	---	---

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2	<b>NEG</b>	---	---
Glycol	WC Method		<b>NEG</b>	---	---

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>47</b>	---	---
Chromium	ppm	ASTM D5185m >5	<b>3</b>	---	---
Nickel	ppm	ASTM D5185m >2	<b>2</b>	---	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m >30	<b>8</b>	---	---
Lead	ppm	ASTM D5185m >30	<b>0</b>	---	---
Copper	ppm	ASTM D5185m >150	<b>264</b>	---	---
Tin	ppm	ASTM D5185m >5	<b>13</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	---	---

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>34</b>	---	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m 50	<b>44</b>	---	---
Manganese	ppm	ASTM D5185m 0	<b>4</b>	---	---
Magnesium	ppm	ASTM D5185m 950	<b>591</b>	---	---
Calcium	ppm	ASTM D5185m 1050	<b>1774</b>	---	---
Phosphorus	ppm	ASTM D5185m 995	<b>825</b>	---	---
Zinc	ppm	ASTM D5185m 1180	<b>940</b>	---	---
Sulfur	ppm	ASTM D5185m 2600	<b>2293</b>	---	---

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>6</b>	---	---
Sodium	ppm	ASTM D5185m	<b>6</b>	---	---
Potassium	ppm	ASTM D5185m >20	<b>20</b>	---	---




### INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	---	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>10.0</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>23.0</b>	---	---

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>24.0</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>7.4</b>	---	---





# OIL ANALYSIS REPORT

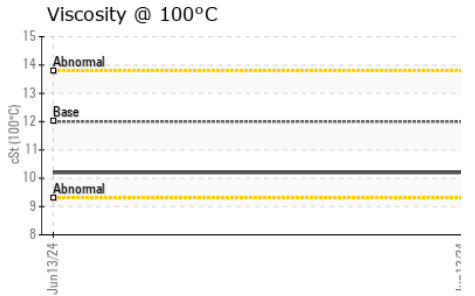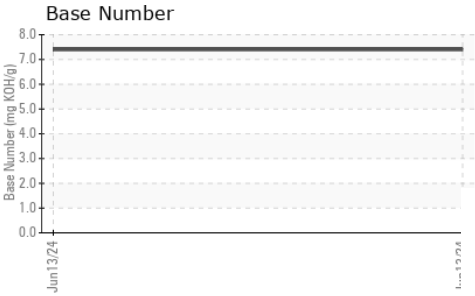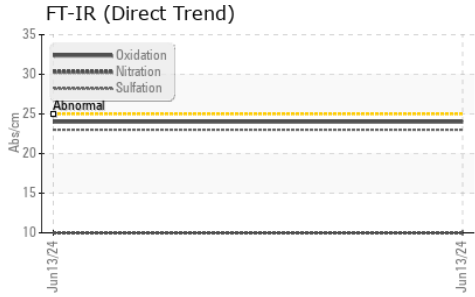

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---
Free Water	scalar	*Visual		<b>NEG</b>	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	<b>10.2</b>	---

## GRAPHS

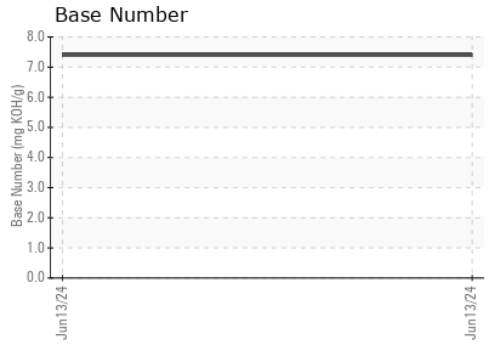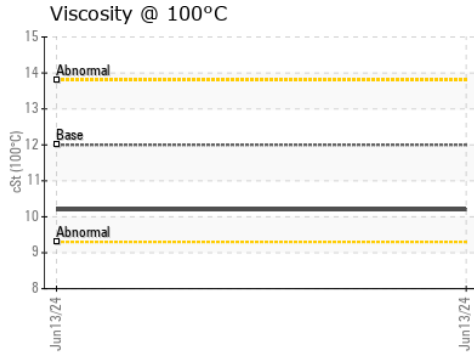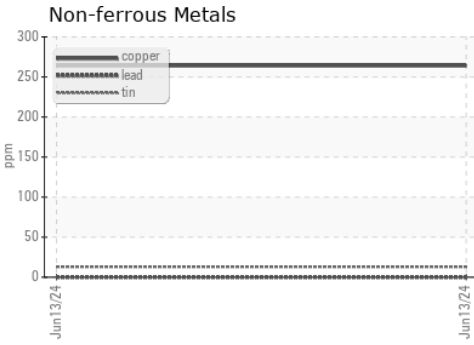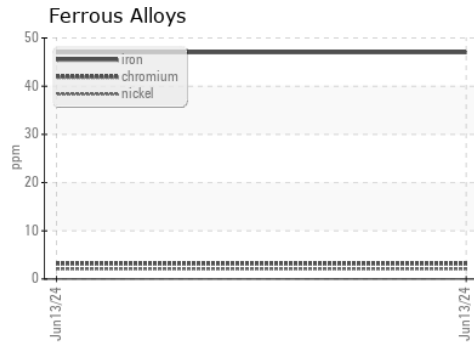

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0094026  
**Lab Number** : **06214133**  
**Unique Number** : 11086997  
**Test Package** : FLEET

**Received** : 18 Jun 2024  
**Tested** : 20 Jun 2024  
**Diagnosed** : 20 Jun 2024 - Sean Felton

**Transervice - Shop 1372 - Berkeley-Moreno Valley**  
 17500 Perris Blvd.  
 Moreno Valley, CA  
 US 92551

Contact: Ryan Cruz  
 rcruz@transervice.com

T: (951)924-7131  
 F: (951)924-7151

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)