




OIL ANALYSIS REPORT

Sample Rating Trend

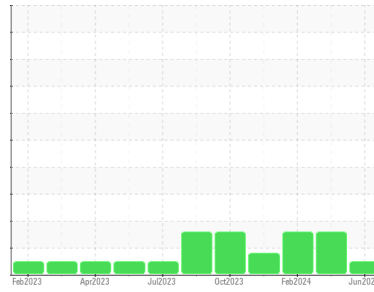

NORMAL



Machine Id

813077

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0121226	GFL0078313	GFL0078296	
Sample Date	Client Info	05 Jun 2024	04 Mar 2024	09 Feb 2024	
Machine Age	hrs	Client Info	0	3116	2953
Oil Age	hrs	Client Info	0	0	0
Oil Changed	Client Info	N/A	Changed	Not Chngd	
Sample Status		NORMAL	ABNORMAL	ABNORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	31	▲ 176	▲ 167
Chromium	ppm ASTM D5185m >4	<1	▲ 5	▲ 5
Nickel	ppm ASTM D5185m >2	<1	2	2
Titanium	ppm ASTM D5185m	0	<1	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >25	14	75	77
Lead	ppm ASTM D5185m >45	0	0	<1
Copper	ppm ASTM D5185m >85	1	13	13
Tin	ppm ASTM D5185m >4	<1	1	2
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	8	14	19
Barium	ppm ASTM D5185m 0	0	1	2
Molybdenum	ppm ASTM D5185m 60	66	99	104
Manganese	ppm ASTM D5185m 0	1	7	8
Magnesium	ppm ASTM D5185m 1010	924	944	943
Calcium	ppm ASTM D5185m 1070	1070	1464	1423
Phosphorus	ppm ASTM D5185m 1150	1015	939	896
Zinc	ppm ASTM D5185m 1270	1218	1196	1256
Sulfur	ppm ASTM D5185m 2060	3268	2437	2538

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	6	13	15
Sodium	ppm ASTM D5185m	5	5	3
Potassium	ppm ASTM D5185m >20	35	194	204

INFRA-RED




method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.5	1.3	1.3
Nitration	Abs/cm *ASTM D7624 >20	10.2	17.3	16.7
Sulfation	Abs/.1mm *ASTM D7415 >30	21.5	34.4	33.4

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	19.3	40.0	37.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.6	4.0	4.0







OIL ANALYSIS REPORT

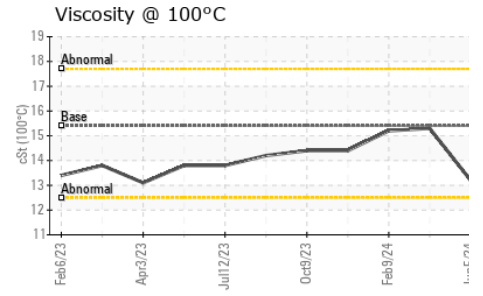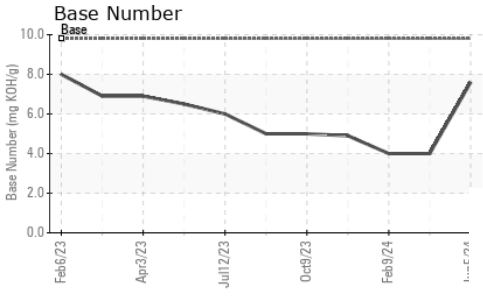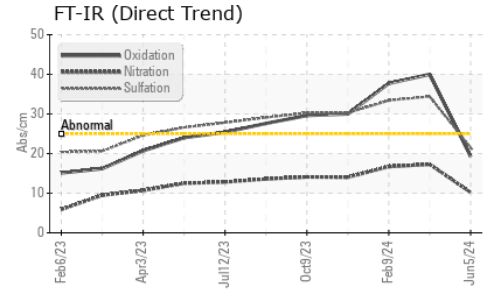

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	15.3	15.2

GRAPHS

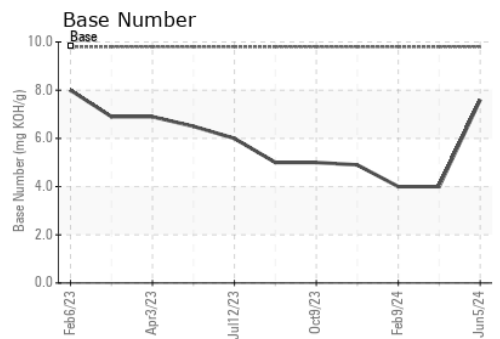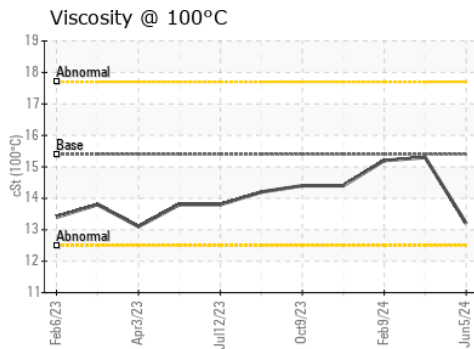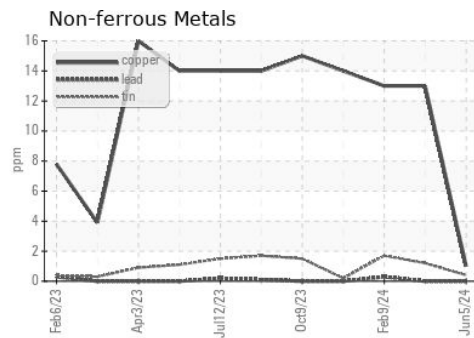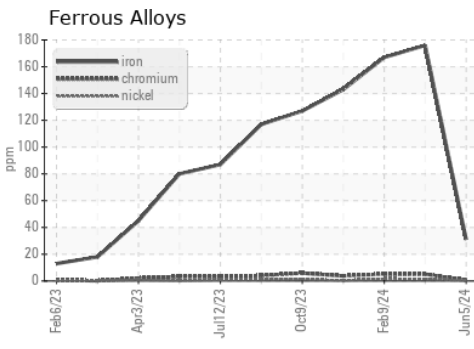

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0121226 **Received** : 19 Jun 2024
Lab Number : **06214389** **Tested** : 20 Jun 2024
Unique Number : 11087253 **Diagnosed** : 20 Jun 2024 - Wes Davis
Test Package : FLEET

GFL Environmental - 844 - Princeton Hauling
 10129 Highway 62 West
 Princeton, KY
 US 42445
 Contact: ROBERT THIBAUT
 robert.thibault@gflenv.com
 T: (931)237-6045
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)