




# OIL ANALYSIS REPORT

Sample Rating Trend

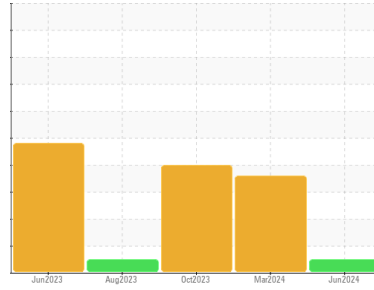

**NORMAL**



Machine Id  
**727146**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0084801</b>	GFL0084811	GFL0084858
Sample Date	Client Info		<b>06 Jun 2024</b>	14 Mar 2024	20 Oct 2023
Machine Age	hrs	Client Info	<b>17666</b>	17107	16009
Oil Age	hrs	Client Info	<b>17107</b>	17107	15935
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	0.0

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>54</b>	▲ 124	78
Chromium	ppm	ASTM D5185m >5	<b>1</b>	4	3
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>3</b>	6	4
Lead	ppm	ASTM D5185m >30	<b>0</b>	3	<1
Copper	ppm	ASTM D5185m >150	<b>&lt;1</b>	4	3
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	6	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>54</b>	68	58
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>929</b>	1035	949
Calcium	ppm	ASTM D5185m 1070	<b>1000</b>	1202	1157
Phosphorus	ppm	ASTM D5185m 1150	<b>965</b>	1175	1035
Zinc	ppm	ASTM D5185m 1270	<b>1190</b>	1376	1230
Sulfur	ppm	ASTM D5185m 2060	<b>3181</b>	2938	2585

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>12</b>	▲ 21	▲ 33
Sodium	ppm	ASTM D5185m	<b>17</b>	37	● 94
Potassium	ppm	ASTM D5185m >20	<b>5</b>	10	● 35

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>1.3</b>	2.4	1.9
Nitration	Abs./cm	*ASTM D7624 >20	<b>13.8</b>	18.9	16.4
Sulfation	Abs./1mm	*ASTM D7415 >30	<b>29.7</b>	35.2	31.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	*ASTM D7414 >25	<b>33.4</b>	39.0	33.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>5.3</b>	▲ 2.2	5.2







# OIL ANALYSIS REPORT

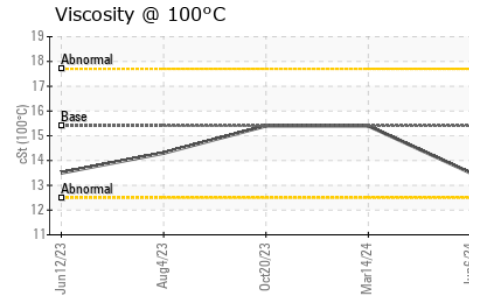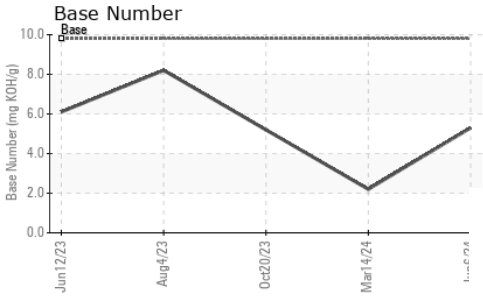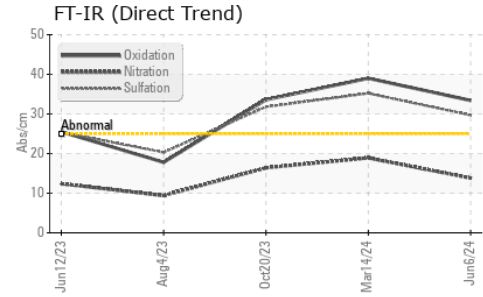

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	15.4

## GRAPHS

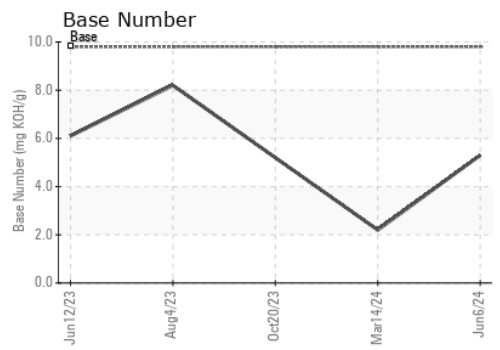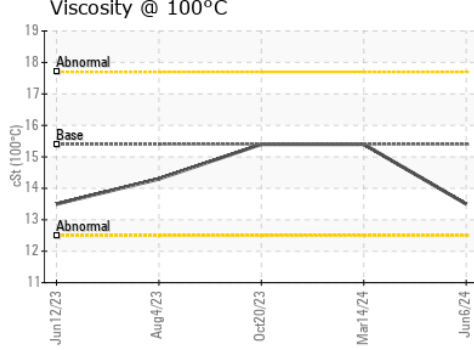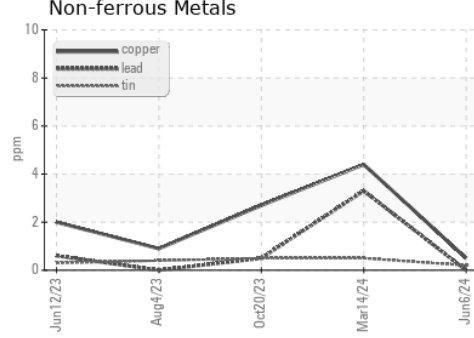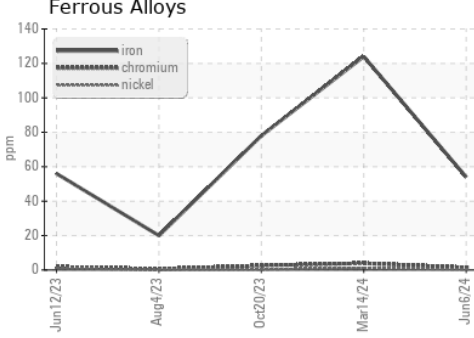

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0084801      **Received** : 19 Jun 2024  
**Lab Number** : **06214413**      **Tested** : 20 Jun 2024  
**Unique Number** : 11087277      **Diagnosed** : 21 Jun 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 959A - Urbana HC**  
 4808 cunningham Rd  
 Urbana, IL  
 US 61802  
 Contact: Kristine Tryon  
 Ktryon@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)