




# OIL ANALYSIS REPORT



Area  
**(BD49557) {UNASSIGNED}**  
 Machine Id  
**913131**  
 Component  
**1 Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (9 GAL)**

### Sample Rating Trend

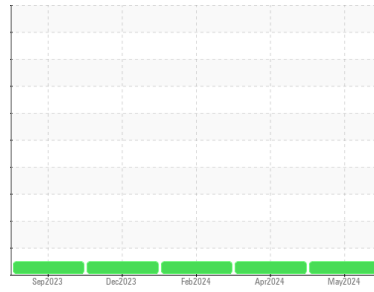

**NORMAL**



### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

### SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0124811</b>	GFL0115039	GFL0106670
Sample Date	Client Info		<b>31 May 2024</b>	23 Apr 2024	04 Feb 2024
Machine Age	hrs	Client Info	<b>3232</b>	3020	2383
Oil Age	hrs	Client Info	<b>212</b>	637	457
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

### CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

### WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>4</b>	11	8
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >5	<b>2</b>	0	1
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185m >20	<b>1</b>	1	<1
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>14</b>	4	8
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

### ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>3</b>	2	1
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>54</b>	64	55
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>939</b>	1011	884
Calcium	ppm	ASTM D5185m 1070	<b>1023</b>	1091	949
Phosphorus	ppm	ASTM D5185m 1150	<b>1021</b>	1081	951
Zinc	ppm	ASTM D5185m 1270	<b>1235</b>	1303	1152
Sulfur	ppm	ASTM D5185m 2060	<b>3543</b>	3319	2790

### CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>3</b>	4	3
Sodium	ppm	ASTM D5185m	<b>2</b>	3	2
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	0

### INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.4	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.1</b>	8.4	6.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.5</b>	19.5	18.7

### FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.4</b>	16.1	14.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.7</b>	6.1	7.7







# OIL ANALYSIS REPORT

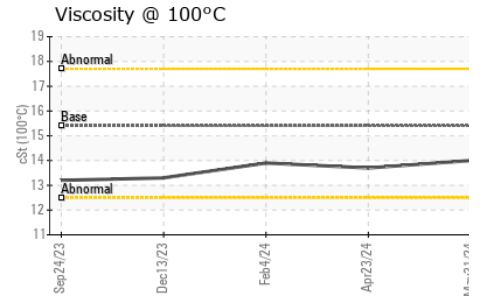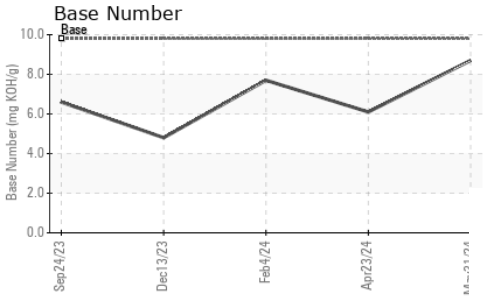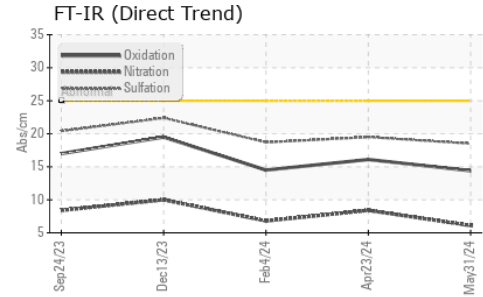

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.0</b>	13.7	13.9

## GRAPHS

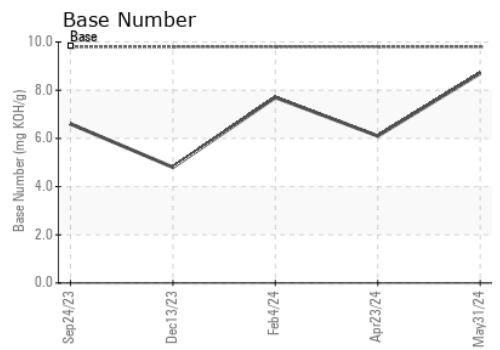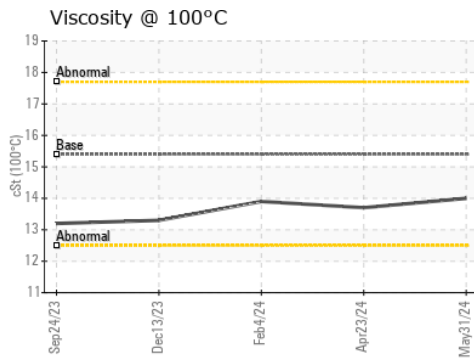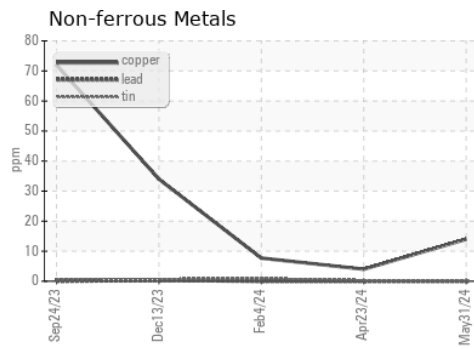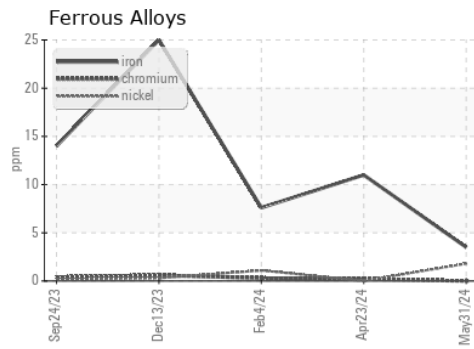

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0124811      **Received** : 19 Jun 2024  
**Lab Number** : **06214419**      **Tested** : 20 Jun 2024  
**Unique Number** : 11087283      **Diagnosed** : 20 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 405 - Arbor Hills**  
 7811 Chubb Rd  
 NORTHVILLE, MI  
 US 48168  
 Contact: Anthony Hopkins  
 ahopkins@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)