


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

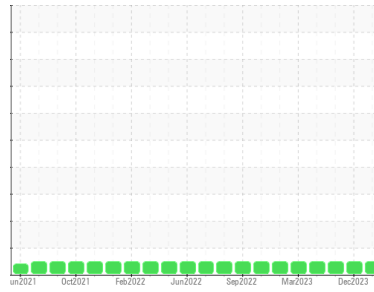

Area  
**Plymouth & Brockton**

Machine Id  
**433**  
Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (36 QTS)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0104612</b>	PCA0104729	PCA0104569
Sample Date	Client Info			<b>08 Jun 2024</b>	29 Dec 2023	07 Oct 2023
Machine Age	mls	Client Info		<b>298755</b>	274164	251761
Oil Age	mls	Client Info		<b>24000</b>	24000	24000
Oil Changed	Client Info			<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2		<b>NEG</b>	NEG	NEG
Glycol	WC Method			<b>NEG</b>	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>90	<b>22</b>	13	16
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	1	2
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	3	4
Lead	ppm	ASTM D5185m	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>6</b>	0	<1
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>60</b>	59	55
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>974</b>	905	879
Calcium	ppm	ASTM D5185m	1070	<b>1203</b>	1051	1078
Phosphorus	ppm	ASTM D5185m	1150	<b>1022</b>	978	903
Zinc	ppm	ASTM D5185m	1270	<b>1249</b>	1226	1165
Sulfur	ppm	ASTM D5185m	2060	<b>3335</b>	2792	2597


CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>4</b>	2	3
Sodium	ppm	ASTM D5185m		<b>4</b>	0	2
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	<1

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	<b>2.2</b>	2.1	1.9
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.8</b>	9.8	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>23.5</b>	22.3	22.9


FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.8</b>	15.2	16.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.87</b>	9.12	9.10

# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

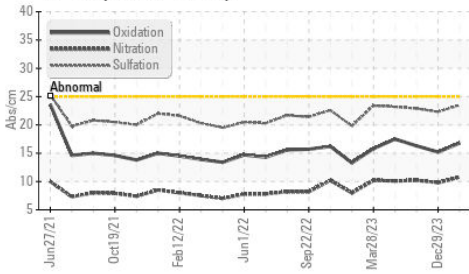

Base Number

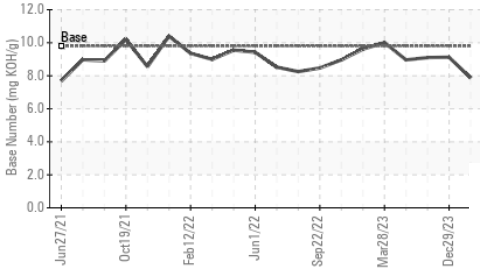

Viscosity @ 100°C

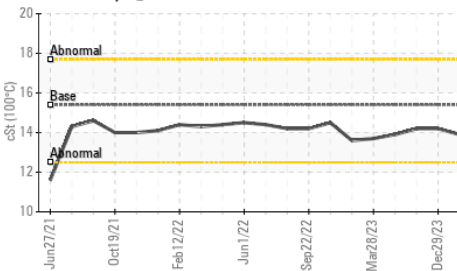


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.2

## GRAPHS


Iron (ppm)

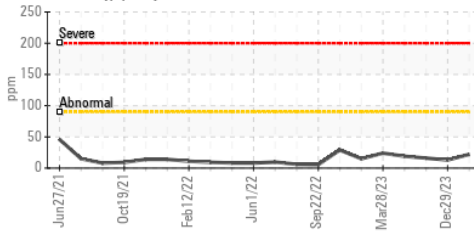


Lead (ppm)

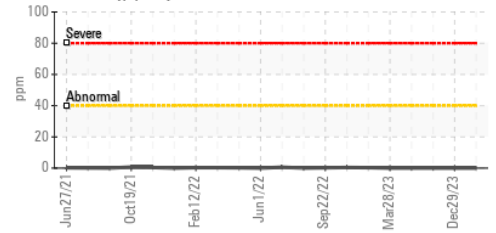


Aluminum (ppm)

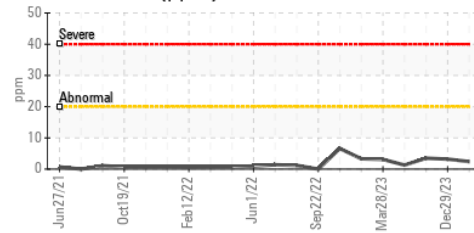


Chromium (ppm)

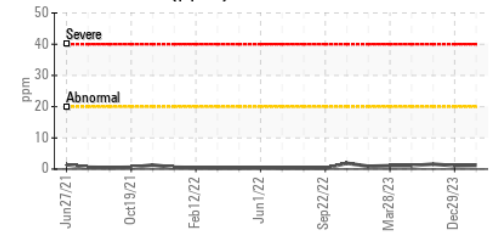


Copper (ppm)

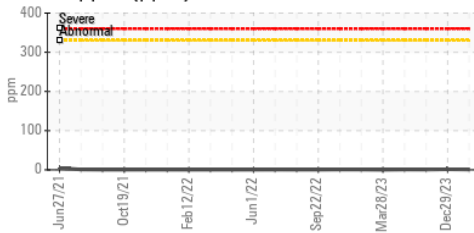


Silicon (ppm)

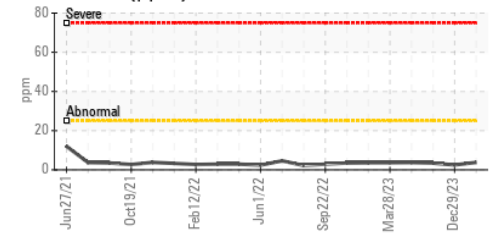

Viscosity @ 100°C

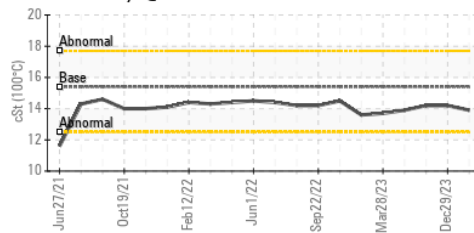

Base Number

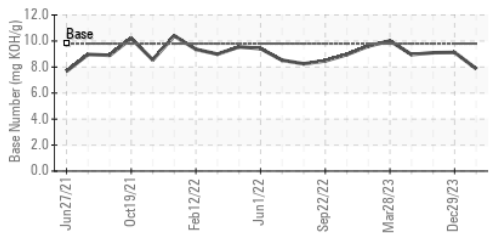

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : PCA0104612

**Lab Number** : 06214929

**Unique Number** : 11087793

**Test Package** : MOB 2

**Received** : 19 Jun 2024

**Tested** : 20 Jun 2024

**Diagnosed** : 20 Jun 2024 - Wes Davis

**PLYMOUTH & BROCKTON**

8 INDUSTRIAL PARK RD

PLYMOUTH, MA

US 02360

Contact: Donald Pelquin

Dpelquin@P-B.com

T: (508)732-6039

F: (508)732-6091

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)