




OIL ANALYSIS REPORT

Sample Rating Trend

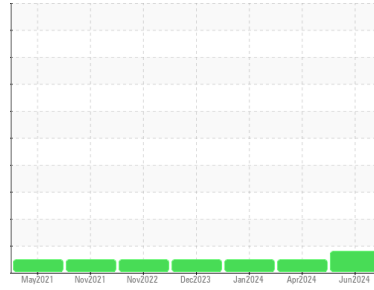

FUEL



Machine Id
4707M
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Wear

All component wear rates are normal.

Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0122358	GFL0117616	GFL0108726
Sample Date	Client Info		10 Jun 2024	22 Apr 2024	10 Jan 2024
Machine Age	hrs	Client Info	13041	12631	11869
Oil Age	hrs	Client Info	11869	12631	11598
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			MARGINAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	27	6	29
Chromium	ppm	ASTM D5185m >5	<1	<1	<1
Nickel	ppm	ASTM D5185m >4	<1	0	0
Titanium	ppm	ASTM D5185m >2	0	0	0
Silver	ppm	ASTM D5185m >2	<1	0	0
Aluminum	ppm	ASTM D5185m >15	5	1	6
Lead	ppm	ASTM D5185m >25	2	0	<1
Copper	ppm	ASTM D5185m >100	<1	<1	<1
Tin	ppm	ASTM D5185m >4	<1	0	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	5	<1	2
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	49	59	59
Manganese	ppm	ASTM D5185m 0	<1	<1	0
Magnesium	ppm	ASTM D5185m 1010	837	996	1004
Calcium	ppm	ASTM D5185m 1070	911	1114	1173
Phosphorus	ppm	ASTM D5185m 1150	977	1058	1097
Zinc	ppm	ASTM D5185m 1270	1188	1284	1377
Sulfur	ppm	ASTM D5185m 2060	2908	3477	3155

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	4	7
Sodium	ppm	ASTM D5185m	6	2	5
Potassium	ppm	ASTM D5185m >20	5	<1	1
Fuel	%	ASTM D3524 >3.0	▲ 1.9	<1.0	<1.0

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	0.9	0.1	1
Nitration	Abs/cm	*ASTM D7624 >20	10.1	5.7	11.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	23.2	18.5	23.2

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.4	14.1	21.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	4.8	8.9	6.3







OIL ANALYSIS REPORT

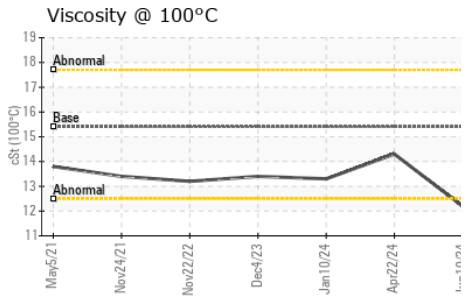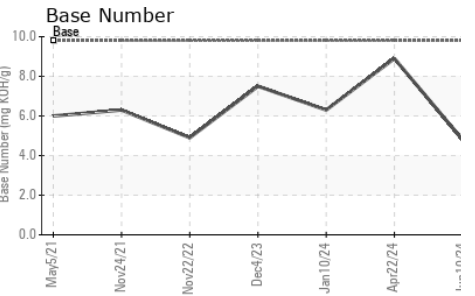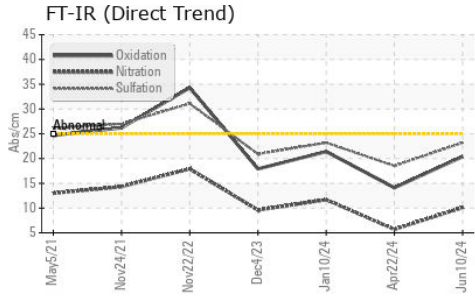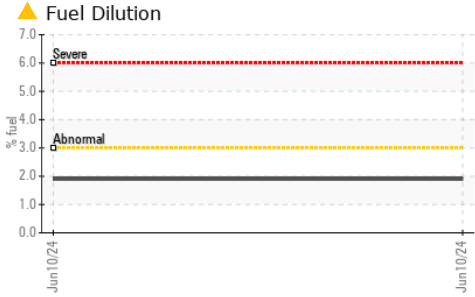

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	12.2	14.3	13.3

GRAPHS

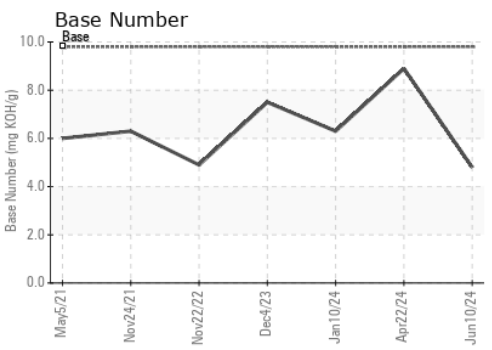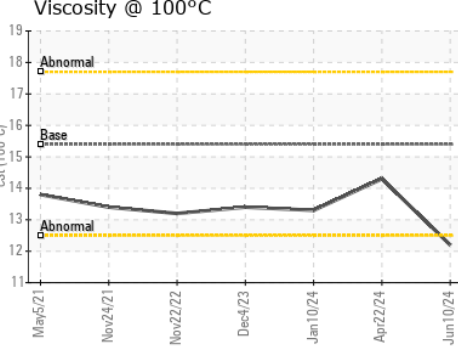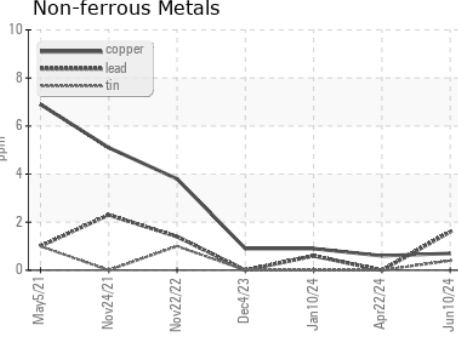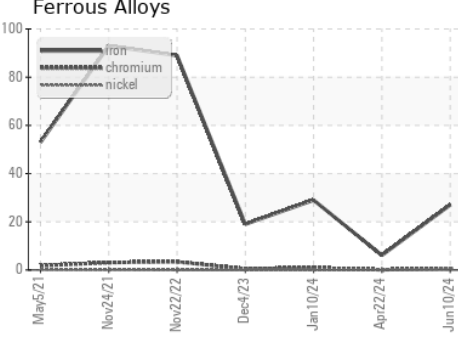

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0122358 **Received** : 20 Jun 2024
Lab Number : **06215366** **Tested** : 24 Jun 2024
Unique Number : 11088230 **Diagnosed** : 24 Jun 2024 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 415 - Michigan East
 6200 Elmridge
 Sterling Heights, MI
 US 48313
 Contact: Frank Wolak
 fwolak@gflenv.com
 T: (586)825-9514
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)