


OIL ANALYSIS REPORT

(60887Z) Walgreens - Tractor [Walgreens - Tractor] 136A624234

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 G

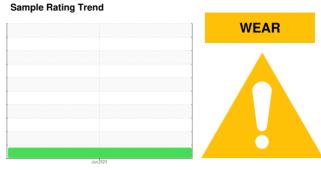

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

GAL)				Jun 2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
	VIATION		IIIIIIIIIIIII		,	HIStory2
Sample Number		Client Info		PCA0121353		
Sample Date	and a	Client Info		13 Jun 2024		
Machine Age	mls	Client Info		68928		
Oil Age	mls	Client Info		68000 Changed		
Oil Changed Sample Status		Client inio		Changed ABNORMAL		
CONTAMINAT	ION	method	limit/base	current		history2
	ION				history1	
Fuel		WC Method	>5	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	91		
Chromium	ppm	ASTM D5185m	>5	7		
Nickel	ppm	ASTM D5185m	>2	2		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>30	143		
Lead	ppm	ASTM D5185m	>30	<1		
Copper	ppm	ASTM D5185m	>150	△ 326		
Tin	ppm	ASTM D5185m	>5	5		
Vanadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		<1		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	19		
Barium	ppm	ASTM D5185m	0	<1		
Molybdenum	ppm	ASTM D5185m	50	50		
Manganese	ppm	ASTM D5185m	0	5		
Magnesium	ppm	ASTM D5185m	950	608		
Calcium	ppm	ASTM D5185m	1050	1711		
Phosphorus	ppm	ASTM D5185m	995	832		
Zinc	ppm	ASTM D5185m	1180	961		
Sulfur	ppm	ASTM D5185m	2600	2039		
CONTAMINAN	TS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	11		
Sodium	ppm	ASTM D5185m		9		
Potassium	ppm	ASTM D5185m	>20	359		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.9		
Nitration	Abs/cm	*ASTM D7624	>20	12.2		
Sulfation	Abs/.1mm	*ASTM D7415	>30	24.9		
FLUID DEGRAD	NOITAC	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	27.0		
Base Number (BN)	mg KOH/g	ASTM D2896		5.4		



OIL ANALYSIS REPORT

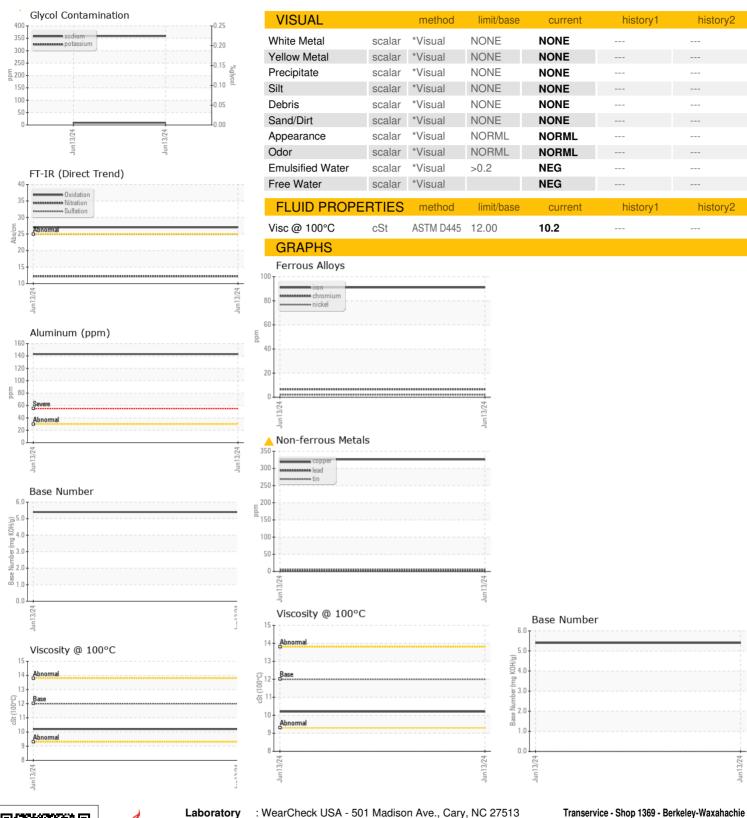



Certificate 12367

Laboratory Sample No.

Test Package : FLEET

Lab Number : 06215439 Unique Number : 11088303

: PCA0121353

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Received : 20 Jun 2024 **Tested** : 21 Jun 2024

Diagnosed : 21 Jun 2024 - Don Baldridge

710 Ovilla Road Waxahachie, TX US 75167

Contact: Robert Beal rbeal@transervice.com T: (972)923-9928

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F: (972)923-9919 Contact/Location: Robert Beal - TSV1369

Report Id: TSV1369 [WUSCAR] 06215439 (Generated: 06/21/2024 16:01:23) Rev: 1