




# OIL ANALYSIS REPORT

Sample Rating Trend

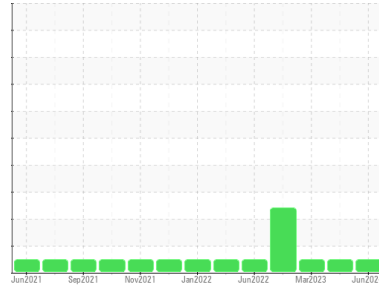

**NORMAL**



Area  
**(YA156349)**

Machine Id  
**930014**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0123420</b>	GFL0082448	GFL0050733
Sample Date	Client Info	<b>18 Jun 2024</b>	26 Sep 2023	16 Mar 2023
Machine Age	hrs	<b>7180</b>	7180	5949
Oil Age	hrs	<b>7180</b>	1231	795
Oil Changed	Client Info	<b>N/A</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>17</b>	7	6
Chromium	ppm	ASTM D5185m >4	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>2</b>	3	2
Lead	ppm	ASTM D5185m >30	<b>15</b>	6	8
Copper	ppm	ASTM D5185m >35	<b>2</b>	2	6
Tin	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	<b>6</b>	18	9
Barium	ppm	ASTM D5185m 5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>55</b>	54	51
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>625</b>	568	508
Calcium	ppm	ASTM D5185m 1510	<b>1887</b>	1583	1639
Phosphorus	ppm	ASTM D5185m 780	<b>869</b>	824	705
Zinc	ppm	ASTM D5185m 870	<b>1092</b>	1009	951
Sulfur	ppm	ASTM D5185m 2040	<b>2905</b>	2642	2343

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	<b>5</b>	7	4
Sodium	ppm	ASTM D5185m	<b>10</b>	7	7
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	2

## INFRA-RED




method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	<b>0</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.8</b>	9.9	11.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>26.2</b>	21.0	24.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>23.2</b>	17.4	20.3
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>3.2</b>	6.0	4.1







# OIL ANALYSIS REPORT

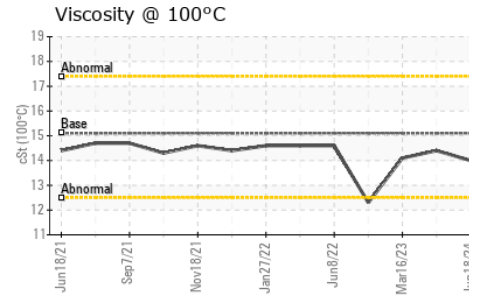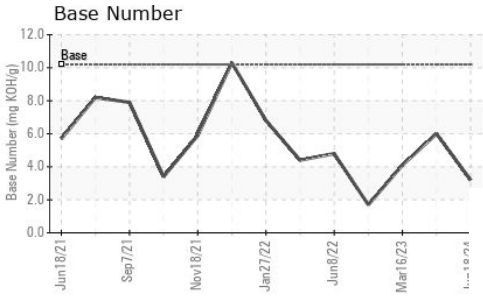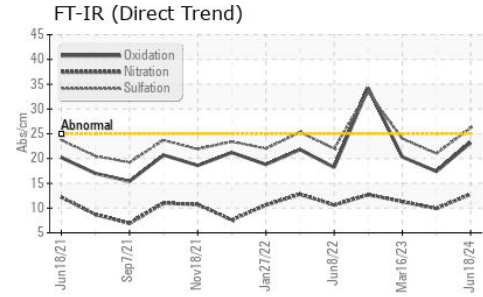

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.0	14.4

## GRAPHS

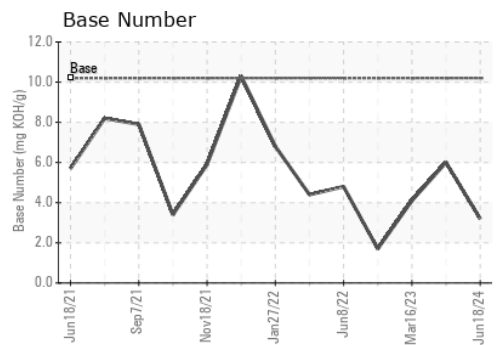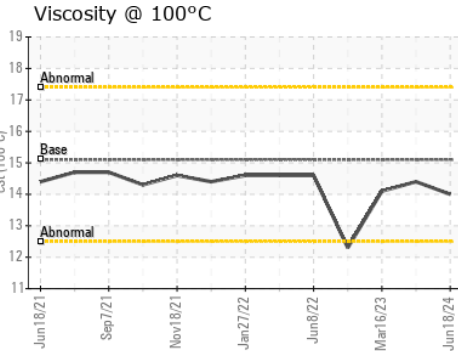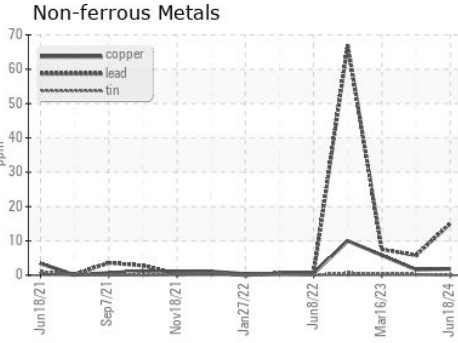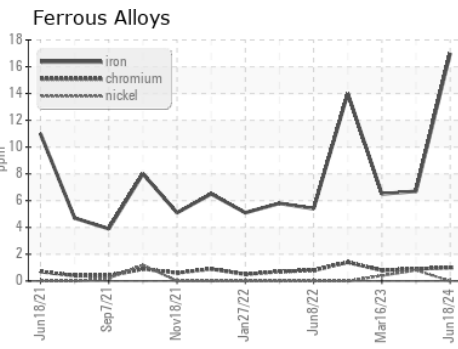

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0123420      **Received** : 20 Jun 2024  
**Lab Number** : 06215550      **Tested** : 21 Jun 2024  
**Unique Number** : 11088414      **Diagnosed** : 21 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 007 - Brunswick**  
 2809 Galloway Road  
 Bolivia, NC  
 US 28422  
 Contact: DONALD CRAVEN  
 dcraven@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)