




# OIL ANALYSIS REPORT

Sample Rating Trend

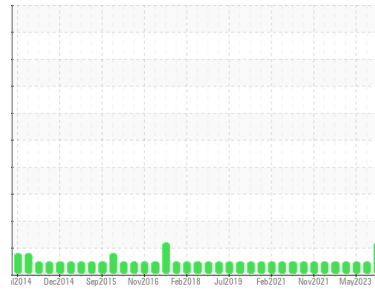

COOL CHEMICALS



Area  
(YA116919)

Machine Id  
10423C

Component  
Natural Gas Engine

Fluid  
PETRO CANADA DURON GEO LD 15W40 (30 QTS)

## DIAGNOSIS

### Recommendation

Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0123440</b>	GFL0082443	GFL0050786
Sample Date	Client Info	<b>18 Jun 2024</b>	07 Sep 2023	03 May 2023
Machine Age	hrs	Client Info	3450	2825
Oil Age	hrs	Client Info	625	1169
Oil Changed	Client Info	<b>N/A</b>	Changed	N/A
Sample Status		<b>ABNORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>20</b>	9	13
Chromium	ppm	ASTM D5185m >4	<b>2</b>	1	1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>3</b>	2	4
Lead	ppm	ASTM D5185m >30	<b>3</b>	2	0
Copper	ppm	ASTM D5185m >35	<b>9</b>	9	11
Tin	ppm	ASTM D5185m >4	<b>0</b>	1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	<b>10</b>	6	4
Barium	ppm	ASTM D5185m 5	<b>&lt;1</b>	44	0
Molybdenum	ppm	ASTM D5185m 50	<b>58</b>	49	55
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m 560	<b>586</b>	480	529
Calcium	ppm	ASTM D5185m 1510	<b>1876</b>	1422	1551
Phosphorus	ppm	ASTM D5185m 780	<b>817</b>	605	628
Zinc	ppm	ASTM D5185m 870	<b>1089</b>	864	937
Sulfur	ppm	ASTM D5185m 2040	<b>3132</b>	2604	2629

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	<b>5</b>	4	4
Sodium	ppm	ASTM D5185m	<b>24</b>	7	8
Potassium	ppm	ASTM D5185m >20	<b>▲ 78</b>	7	8

## INFRA-RED





method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.2</b>	10.5	10.7
Sulfation	Abs.1mm	*ASTM D7415 >30	<b>23.8</b>	20.3	21.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs.1mm	*ASTM D7414 >25	<b>18.1</b>	16.4	16.9
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>4.6</b>	4.4	2.5







# OIL ANALYSIS REPORT

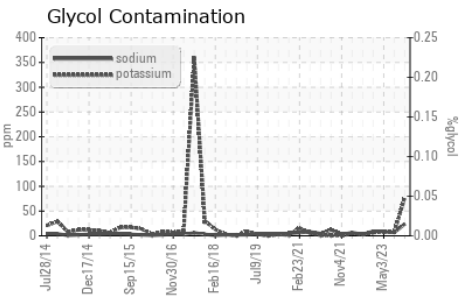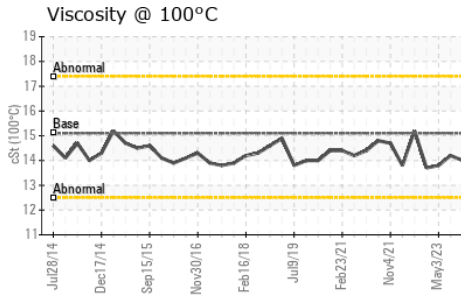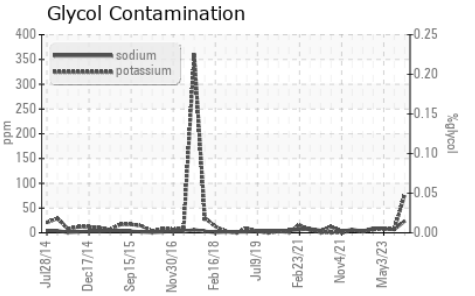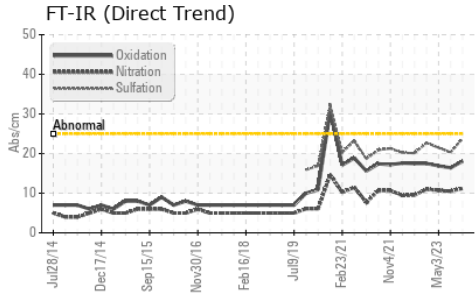

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.0	14.2

## GRAPHS

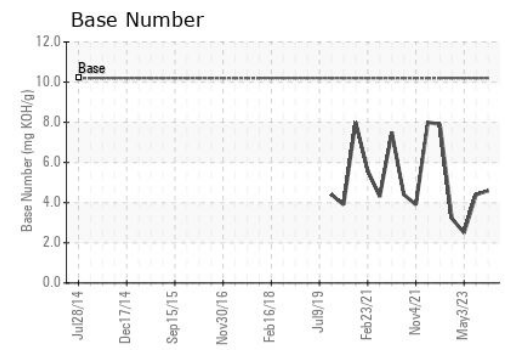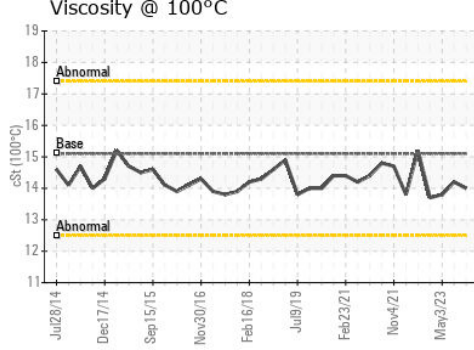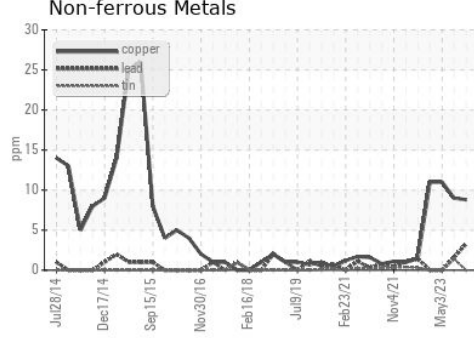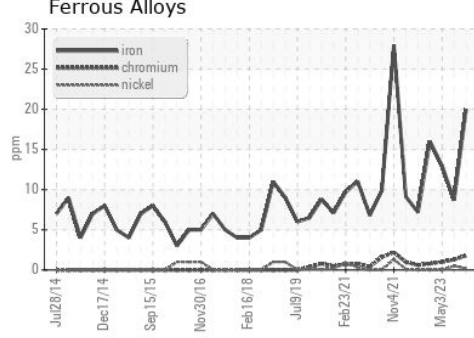

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0123440      **Received** : 20 Jun 2024  
**Lab Number** : 06215552      **Tested** : 21 Jun 2024  
**Unique Number** : 11088416      **Diagnosed** : 21 Jun 2024 - Sean Felton  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 007 - Brunswick**  
 2809 Galloway Road  
 Bolivia, NC  
 US 28422  
 Contact: DONALD CRAVEN  
 dcraven@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)