




OIL ANALYSIS REPORT

Sample Rating Trend

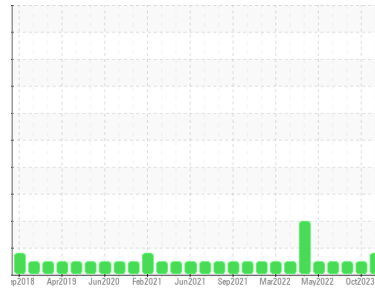

WEAR



Area
(YA146559)

Machine Id
10877C

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (30 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0123416	GFL0082414	GFL0050729
Sample Date	Client Info		18 Jun 2024	26 Oct 2023	16 Mar 2023
Machine Age	hrs	Client Info	12494	12494	12494
Oil Age	hrs	Client Info	12494	12494	1099
Oil Changed	Client Info		N/A	Changed	Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	19	12	18
Chromium	ppm	ASTM D5185m >4	2	<1	3
Nickel	ppm	ASTM D5185m >2	0	0	<1
Titanium	ppm	ASTM D5185m	<1	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >9	2	2	4
Lead	ppm	ASTM D5185m >30	3	0	2
Copper	ppm	ASTM D5185m >35	▲ 144	0	<1
Tin	ppm	ASTM D5185m >4	0	0	<1
Vanadium	ppm	ASTM D5185m	<1	0	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	11	38	13
Barium	ppm	ASTM D5185m 5	0	0	0
Molybdenum	ppm	ASTM D5185m 50	53	48	52
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 560	602	521	514
Calcium	ppm	ASTM D5185m 1510	1785	1543	1617
Phosphorus	ppm	ASTM D5185m 780	808	851	720
Zinc	ppm	ASTM D5185m 870	1011	897	961
Sulfur	ppm	ASTM D5185m 2040	2697	2348	2482

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	7	7	4
Sodium	ppm	ASTM D5185m	6	5	7
Potassium	ppm	ASTM D5185m >20	4	4	1

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0	0.1
Nitration	Abs/cm	*ASTM D7624 >20	9.9	7.2	10.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.7	19.0	22.5

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.7	16.1	17.7
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	5.5	8.1	5.1







OIL ANALYSIS REPORT

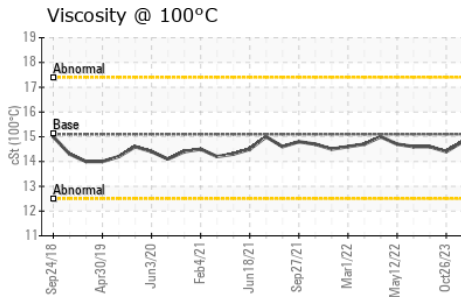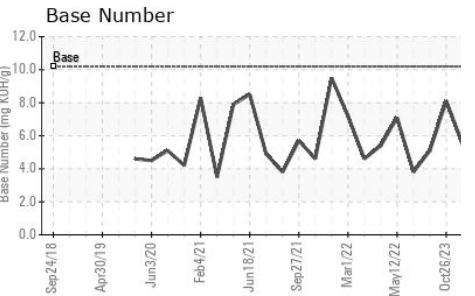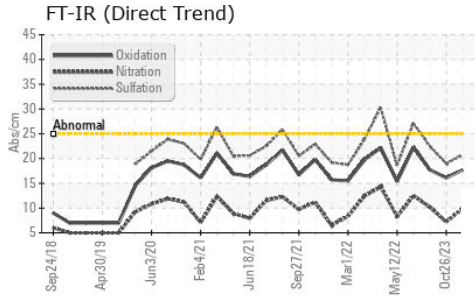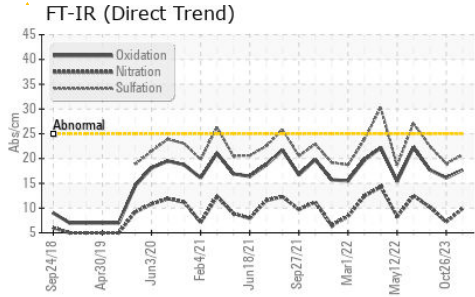

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	LIGHT	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.8	14.4

GRAPHS

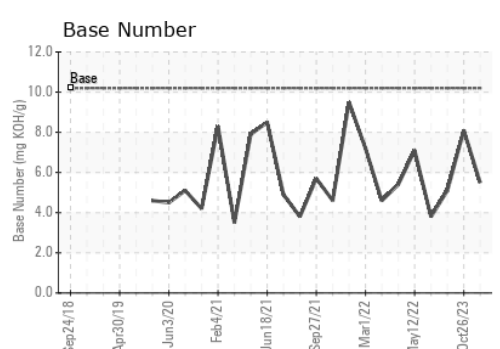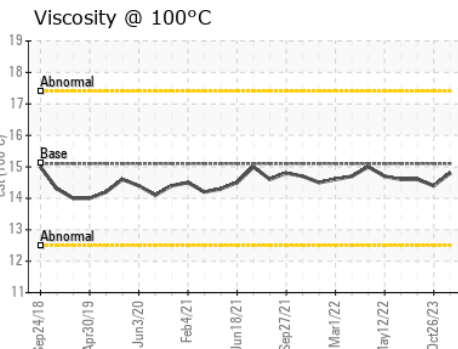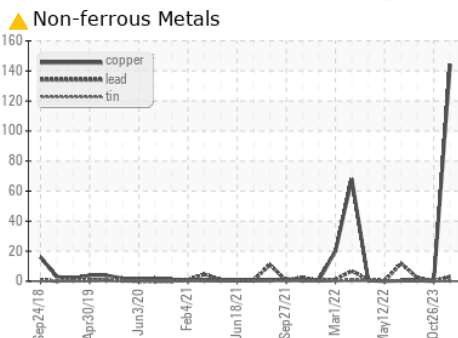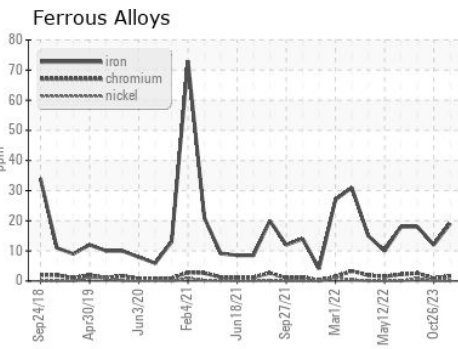

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0123416 **Received** : 20 Jun 2024
Lab Number : 06215570 **Tested** : 21 Jun 2024
Unique Number : 11088434 **Diagnosed** : 21 Jun 2024 - Sean Felton
Test Package : FLEET

GFL Environmental - 007 - Brunswick
 2809 Galloway Road
 Bolivia, NC
 US 28422
 Contact: DONALD CRAVEN
 dcraven@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)