




OIL ANALYSIS REPORT

Sample Rating Trend

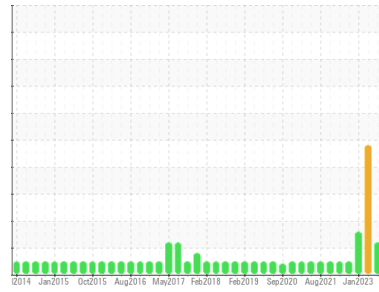

COOL CHEMICALS



Area
(YA117932)

Machine Id
10422C

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (30 GAL)

DIAGNOSIS

Recommendation

Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0082426	GFL0082453	GFL0050749
Sample Date	Client Info	11 Jun 2024	02 Jun 2023	25 Jan 2023
Machine Age	hrs	99290	5193	4759
Oil Age	hrs	99290	366	1082
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ATTENTION	ABNORMAL	ABNORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>50	10	4	12
Chromium	ppm	ASTM D5185m	>4	1	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>9	2	2	2
Lead	ppm	ASTM D5185m	>30	3	0	4
Copper	ppm	ASTM D5185m	>35	22	0	2
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	50	12	20	10
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	50	57	14	37
Manganese	ppm	ASTM D5185m	0	<1	<1	<1
Magnesium	ppm	ASTM D5185m	560	621	145	373
Calcium	ppm	ASTM D5185m	1510	1632	519	1170
Phosphorus	ppm	ASTM D5185m	780	850	376	563
Zinc	ppm	ASTM D5185m	870	1059	271	638
Sulfur	ppm	ASTM D5185m	2040	3043	1668	2337

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>+100	5	2	10
Sodium	ppm	ASTM D5185m		129	3	9
Potassium	ppm	ASTM D5185m	>20	5	3	5

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844		0	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	9.9	6.9	10.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	26.2	25.5


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	32.7	24.6
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	6.4	0.2	1.5




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

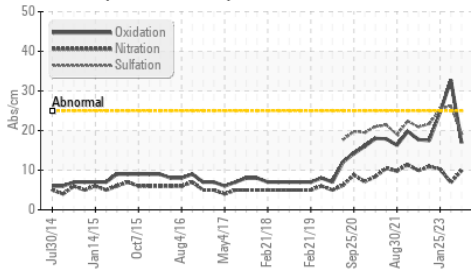


Glycol Contamination

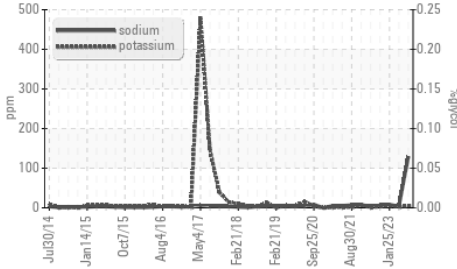

Viscosity @ 100°C

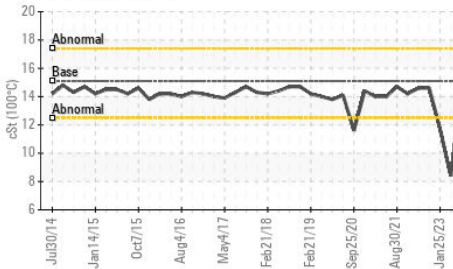

Glycol Contamination

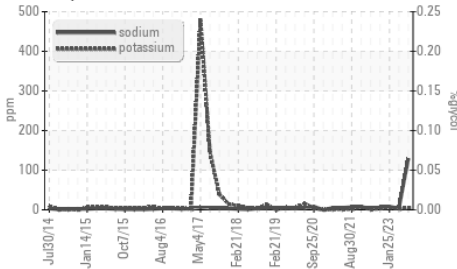


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.2	8.4, 11.7

GRAPHS


Ferrous Alloys

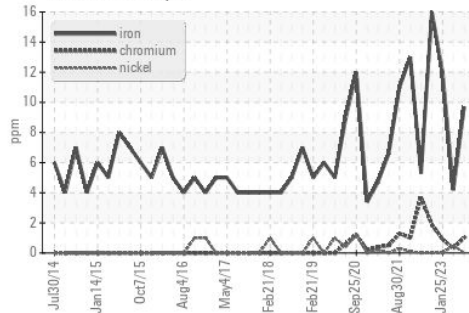


Non-ferrous Metals

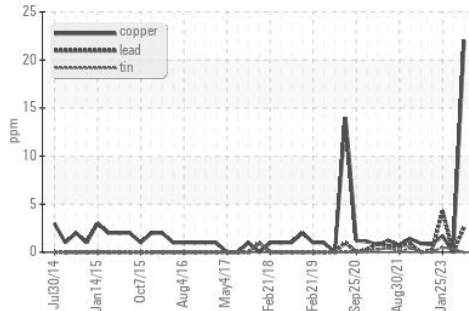

Viscosity @ 100°C

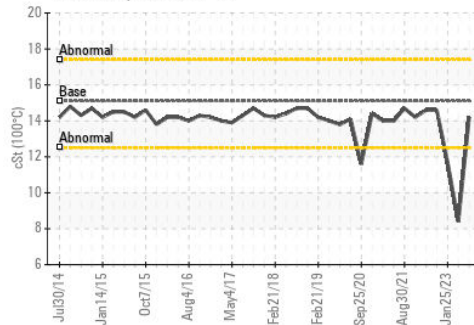

Base Number

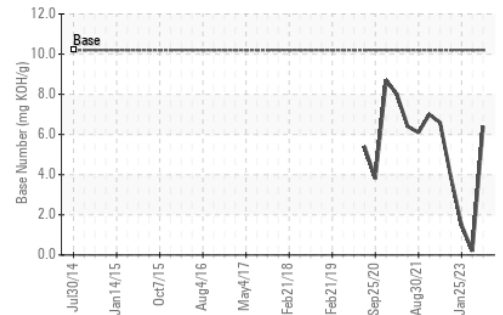

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0082426

Lab Number : 06215573

Unique Number : 11088437

Test Package : FLEET (Additional Tests: Glycol)

Received : 20 Jun 2024

Tested : 21 Jun 2024

Diagnosed : 21 Jun 2024 - Sean Felton

GFL Environmental - 007 - Brunswick

2809 Galloway Road

Bolivia, NC

US 28422

Contact: DONALD CRAVEN

dcraven@gflenv.com

T:

F: (910)253-4179

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)