




# OIL ANALYSIS REPORT

Sample Rating Trend

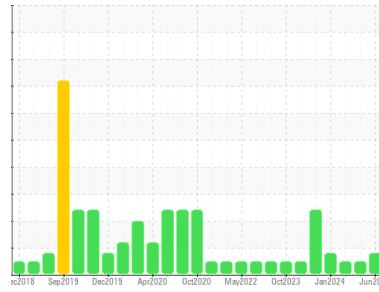

FUEL



Machine Id  
**923031-260313**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Light fuel dilution occurring. No other contaminants were detected in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0124063</b>	GFL0117245	GFL0117196	
Sample Date	Client Info	<b>18 Jun 2024</b>	02 May 2024	01 Apr 2024	
Machine Age	hrs	Client Info	<b>6335</b>	6198	6025
Oil Age	hrs	Client Info	<b>0</b>	0	600
Oil Changed	Client Info	<b>Not Chngd</b>	Not Chngd	Changed	
Sample Status		<b>MARGINAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >110	<b>11</b>	5	41
Chromium	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	2
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>2</b>	2	12
Lead	ppm	ASTM D5185m >45	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >85	<b>&lt;1</b>	<1	2
Tin	ppm	ASTM D5185m >4	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 0	<b>3</b>	3	2
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>57</b>	59	63
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>943</b>	958	949
Calcium	ppm	ASTM D5185m 1070	<b>1186</b>	1105	1152
Phosphorus	ppm	ASTM D5185m 1150	<b>1096</b>	1073	1012
Zinc	ppm	ASTM D5185m 1270	<b>1330</b>	1281	1271
Sulfur	ppm	ASTM D5185m 2060	<b>3752</b>	3638	3422

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >30	<b>8</b>	2	5
Sodium	ppm	ASTM D5185m	<b>4</b>	10	17
Potassium	ppm	ASTM D5185m >20	<b>3</b>	2	24
Fuel	%	ASTM D3524 >5	<b>▲ 3.6</b>	<1.0	<1.0

## INFRA-RED





method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0.2	1.8
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.4</b>	6.8	11.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.2</b>	18.4	23.3

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.9</b>	14.5	18.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.5</b>	8.7	7.2







# OIL ANALYSIS REPORT

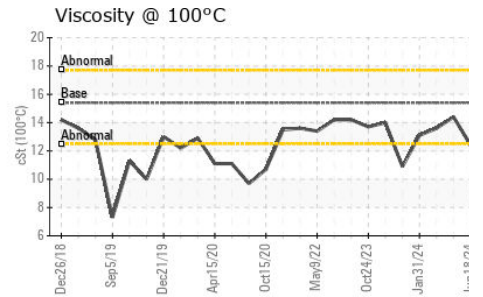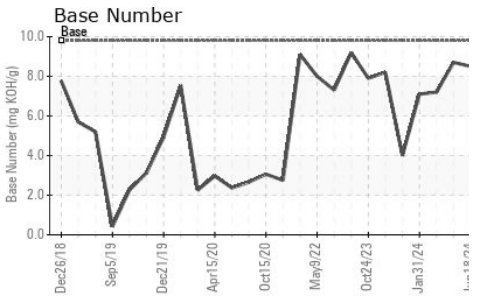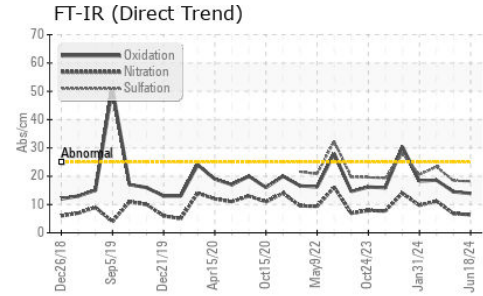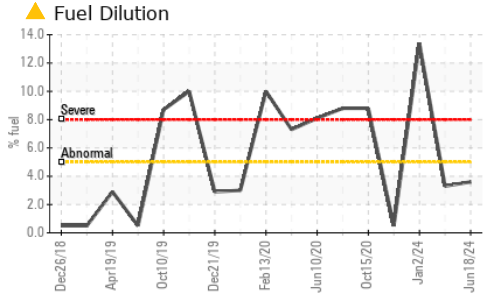

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.4</b>	14.4	13.6

## GRAPHS

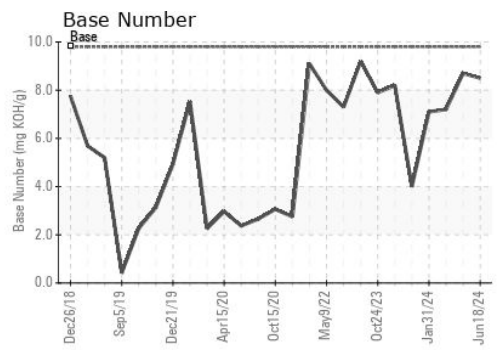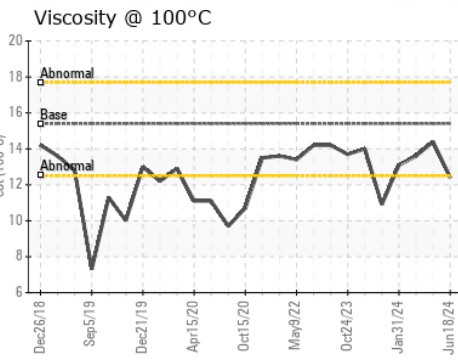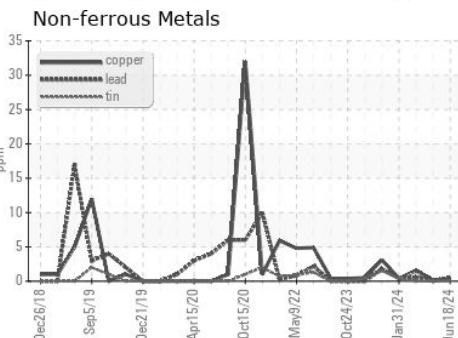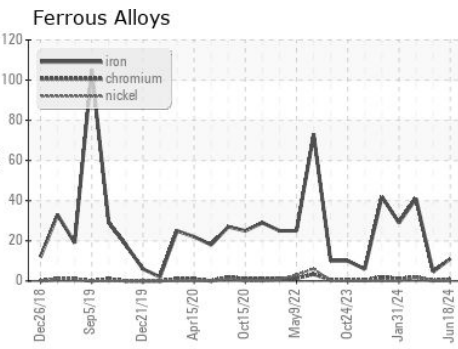

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0124063  
**Lab Number** : **06215615**  
**Unique Number** : 11088479  
**Test Package** : FLEET ( Additional Tests: FuelDilution, PercentFuel )

**GFL Environmental - 836 - Kansas City Hauling**  
 7801 East Truman Road  
 Kansas City, MO  
 US 64126  
 Contact: Loyce Stewart  
 loyce.stewart@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)