


# OIL ANALYSIS REPORT



Area  
**G.LOPES CONSTRUCTION INC./Off-Road**  
 Machine Id  
**BH890**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

Sample Rating Trend

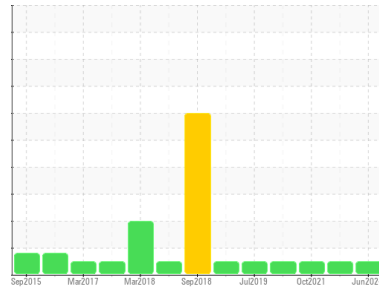

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0122982</b>	PCA0090691	PCA0059386
Sample Date	Client Info		<b>18 Jun 2024</b>	02 May 2023	13 Oct 2021
Machine Age	hrs	Client Info	<b>6160</b>	6160	4945
Oil Age	hrs	Client Info	<b>6160</b>	6160	6160
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>51	<b>20</b>	37	46
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	1	1
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>1</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>1</b>	0	5
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	3	2
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	4	2
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	<1
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	0	<b>7</b>	9	14
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>61</b>	61	63
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>984</b>	929	927
Calcium	ppm	ASTM D5185m	1070	<b>1126</b>	1036	1104
Phosphorus	ppm	ASTM D5185m	1150	<b>1079</b>	982	1045
Zinc	ppm	ASTM D5185m	1270	<b>1300</b>	1253	1164
Sulfur	ppm	ASTM D5185m	2060	<b>3773</b>	3115	2646

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>22	<b>3</b>	4	3
Sodium	ppm	ASTM D5185m	>31	<b>2</b>	4	0
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	<1	<1




## INFRA-RED

	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>3	<b>1.6</b>	0.2	2.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>6.7</b>	7.4	10.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.3</b>	18.2	23.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.1</b>	16.5	16
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>10.12</b>	10.17	9.94









# OIL ANALYSIS REPORT

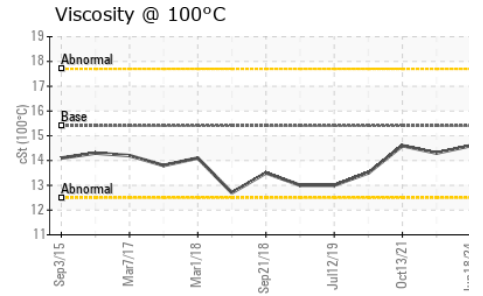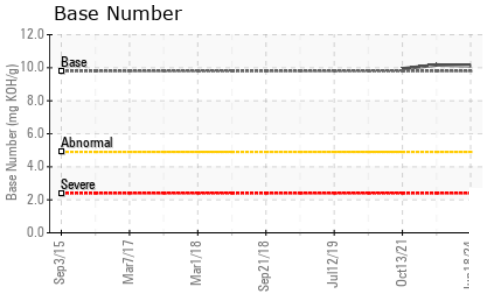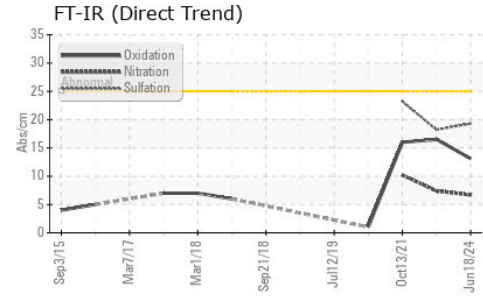

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.6	14.3

## GRAPHS

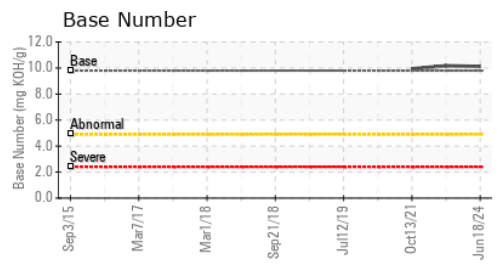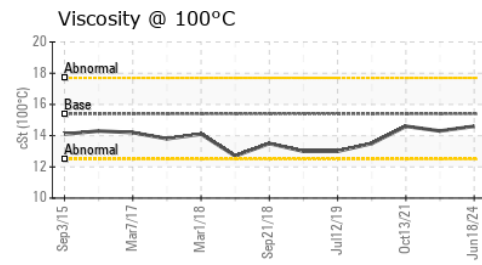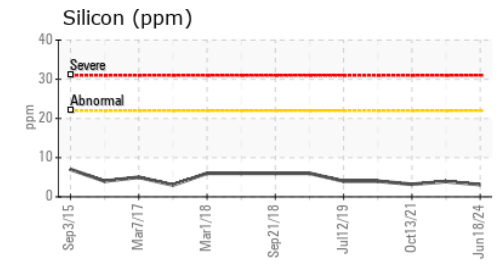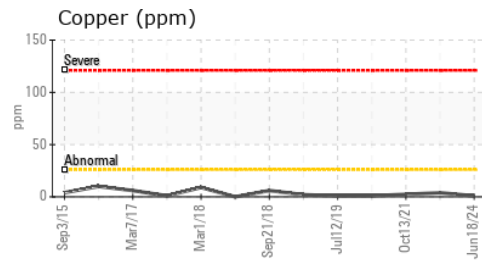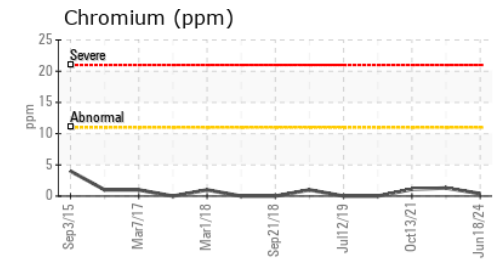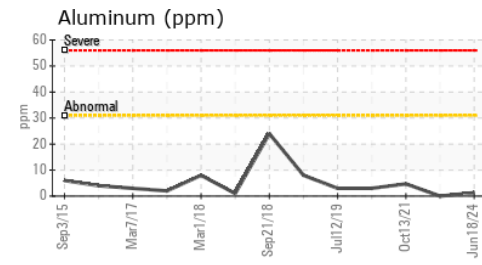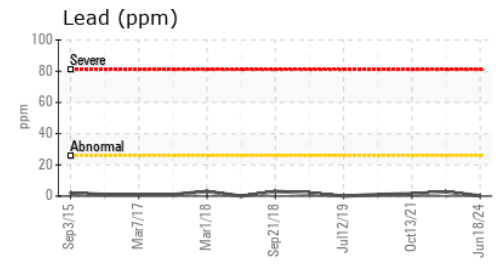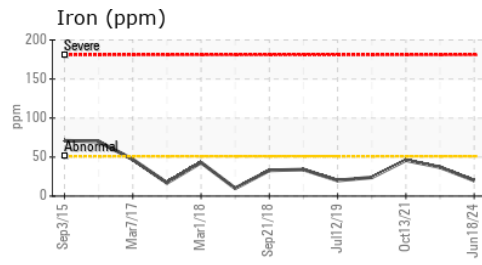

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0122982      **Received** : 20 Jun 2024  
**Lab Number** : 06215932      **Tested** : 22 Jun 2024  
**Unique Number** : 11088796      **Diagnosed** : 22 Jun 2024 - Wes Davis  
**Test Package** : MOB 2

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)