


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

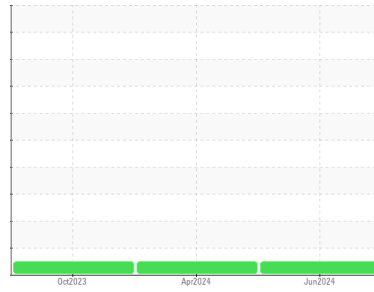

Area
(59099Z) Walgreens - Tractor
 Machine Id
[Walgreens - Tractor] 136A624337
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0128586	PCA0118742	PCA0106592
Sample Date	Client Info			14 Jun 2024	09 Apr 2024	18 Oct 2023
Machine Age	mls	Client Info		152910	126654	63601
Oil Age	mls	Client Info		26256	63053	63000
Oil Changed	Client Info			Not Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	18	39	72
Chromium	ppm	ASTM D5185m	>5	2	4	6
Nickel	ppm	ASTM D5185m	>2	<1	1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>3	<1	<1	0
Aluminum	ppm	ASTM D5185m	>30	8	28	106
Lead	ppm	ASTM D5185m	>30	0	1	2
Copper	ppm	ASTM D5185m	>150	121	154	166
Tin	ppm	ASTM D5185m	>5	<1	2	3
Vanadium	ppm	ASTM D5185m		0	<1	0
Cadmium	ppm	ASTM D5185m		0	1	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	2	3	23
Barium	ppm	ASTM D5185m	0	0	<1	0
Molybdenum	ppm	ASTM D5185m	50	61	62	53
Manganese	ppm	ASTM D5185m	0	<1	2	5
Magnesium	ppm	ASTM D5185m	950	985	852	525
Calcium	ppm	ASTM D5185m	1050	1115	1152	1682
Phosphorus	ppm	ASTM D5185m	995	1020	917	721
Zinc	ppm	ASTM D5185m	1180	1299	1060	843
Sulfur	ppm	ASTM D5185m	2600	2532	1961	1511

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	4	6	8
Sodium	ppm	ASTM D5185m		<1	2	8
Potassium	ppm	ASTM D5185m	>20	14	61	252
Fuel	%	ASTM D3524	>5	<1.0	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4	0.6	0.8
Nitration	Abs/cm	*ASTM D7624	>20	7.4	9.5	11.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	21.4	23.7

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.8	20.4	26.7
Base Number (BN)	mg KOH/g	ASTM D2896		8.0	5.6	5.9





OIL ANALYSIS REPORT

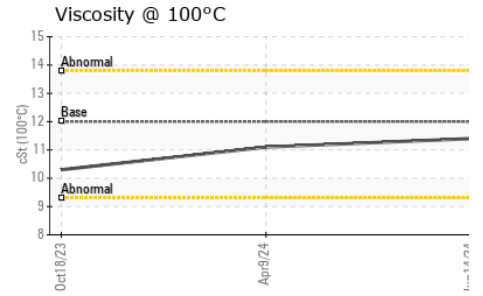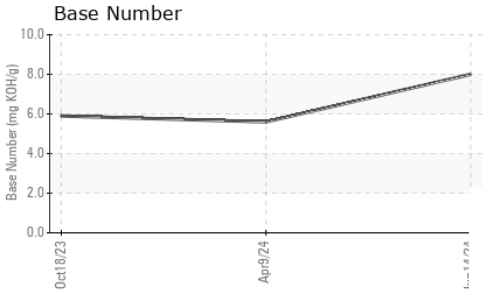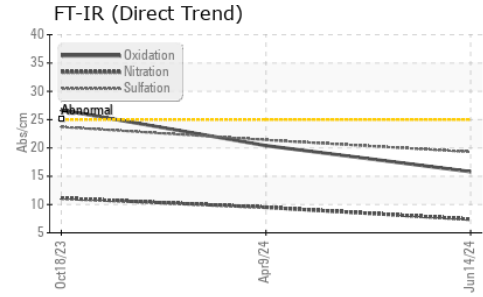

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445 12.00	11.4	11.1	10.3

GRAPHS

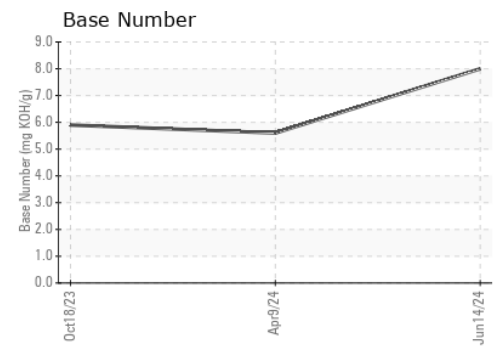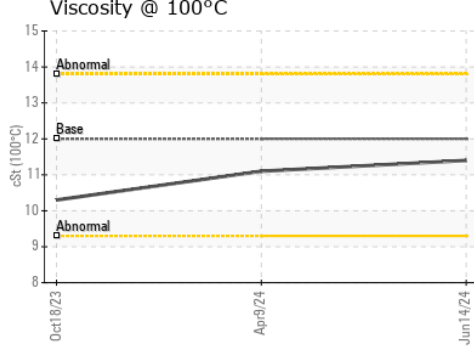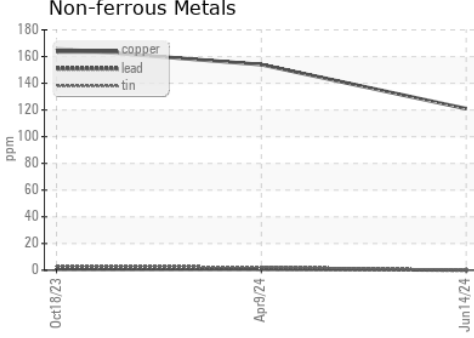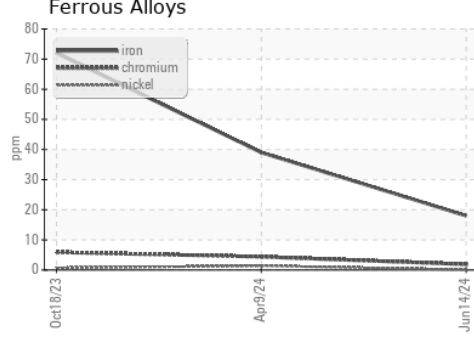

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0128586 **Received** : 20 Jun 2024
Lab Number : **06216420** **Tested** : 23 Jun 2024
Unique Number : 11089284 **Diagnosed** : 23 Jun 2024 - Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Transervice - Shop 1364 - Berkeley-Mt. Vernon
 5100 Lake Terrace NE
 Mt. Vernon, IL
 US 62864
 Contact: Erien White
 ewhite@transervice.com
 T: (618)244-8726
 F: (618)244-8791

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)