




OIL ANALYSIS REPORT



Area
(BD33438)
 Machine Id
413098 MACK GU813
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

Sample Rating Trend

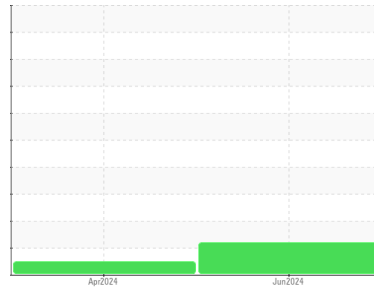

FUEL



DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0115210	GFL0110981	---
Sample Date	Client Info	17 Jun 2024	10 Apr 2024	---
Machine Age	hrs Client Info	3053	2576	---
Oil Age	hrs Client Info	17	16	---
Oil Changed	Client Info	Changed	Changed	---
Sample Status		ABNORMAL	NORMAL	---

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	---
Glycol	WC Method	NEG	NEG	---

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	10	2	---
Chromium	ppm ASTM D5185m >20	<1	0	---
Nickel	ppm ASTM D5185m >15	<1	0	---
Titanium	ppm ASTM D5185m >2	<1	<1	---
Silver	ppm ASTM D5185m >3	<1	0	---
Aluminum	ppm ASTM D5185m >20	2	2	---
Lead	ppm ASTM D5185m >40	<1	0	---
Copper	ppm ASTM D5185m >330	13	3	---
Tin	ppm ASTM D5185m >15	<1	0	---
Vanadium	ppm ASTM D5185m	0	0	---
Cadmium	ppm ASTM D5185m	0	0	---

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	10	14	---
Barium	ppm ASTM D5185m 10	0	0	---
Molybdenum	ppm ASTM D5185m 100	53	51	---
Manganese	ppm ASTM D5185m	0	<1	---
Magnesium	ppm ASTM D5185m 450	820	834	---
Calcium	ppm ASTM D5185m 3000	1054	1036	---
Phosphorus	ppm ASTM D5185m 1150	939	999	---
Zinc	ppm ASTM D5185m 1350	1155	1175	---
Sulfur	ppm ASTM D5185m 4250	2747	3780	---

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	4	5	---
Sodium	ppm ASTM D5185m >158	<1	1	---
Potassium	ppm ASTM D5185m >20	2	2	---
Fuel	% ASTM D3524 >3.0	▲ 4.8	<1.0	---

INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.8	0.1	---
Nitration	Abs/cm *ASTM D7624 >20	7.5	5.2	---
Sulfation	Abs/.1mm *ASTM D7415 >30	19.5	17.6	---

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.9	12.8	---
Base Number (BN)	mg KOH/g ASTM D2896 8.5	8.3	9.4	---







OIL ANALYSIS REPORT

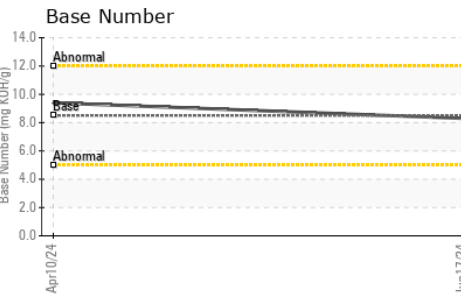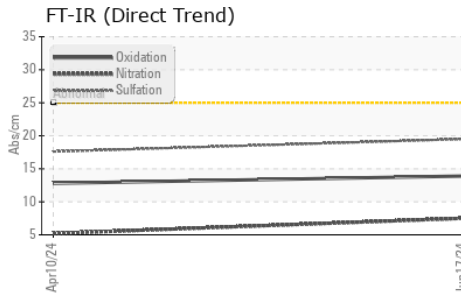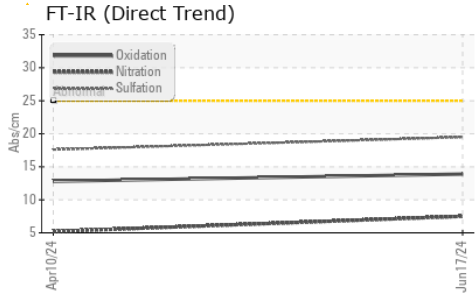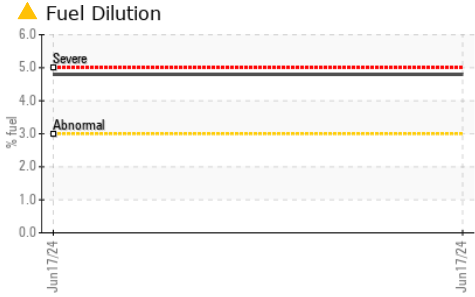

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	▲ 12.0	13.9	---

GRAPHS

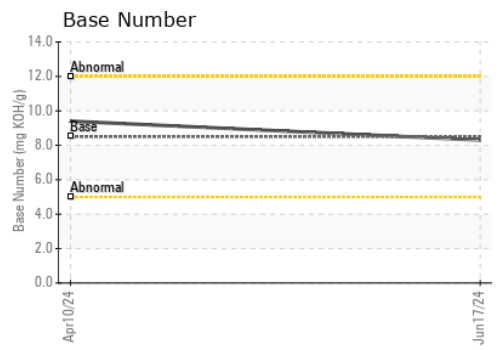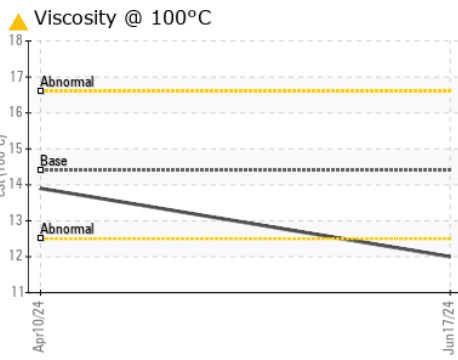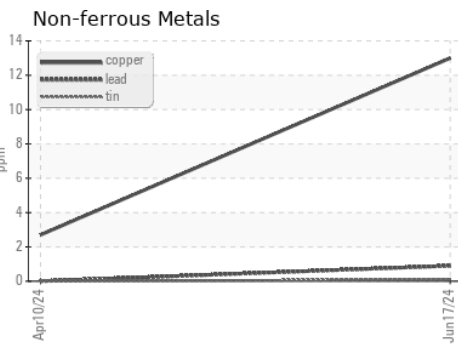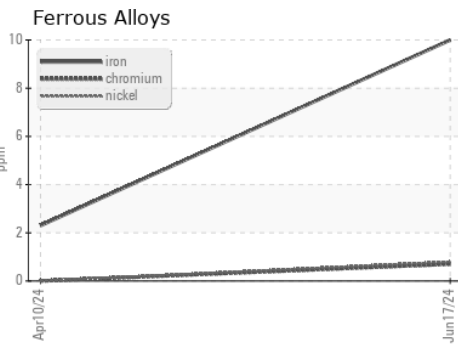

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0115210 **Received** : 20 Jun 2024
Lab Number : 06216462 **Tested** : 25 Jun 2024
Unique Number : 11089326 **Diagnosed** : 25 Jun 2024 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 642B- MCM Disposal
 10450 Pease Ave
 Byron Center, MI
 US 49315
 Contact: Joshua VanVolkinburg

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)