




# OIL ANALYSIS REPORT

Sample Rating Trend

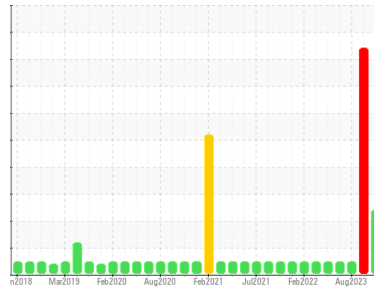

GLYCOL



Area  
**(YA134239)**  
 Machine Id  
**AUTOCAR 3765**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (9 GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0119666</b>	GFL0111401	GFL0072238
Sample Date	Client Info		<b>12 May 2024</b>	03 Feb 2024	08 Aug 2023
Machine Age	mls	Client Info	<b>17691</b>	0	277401
Oil Age	mls	Client Info	<b>0</b>	0	15370
Oil Changed	Client Info		<b>N/A</b>	N/A	Changed
Sample Status			<b>ABNORMAL</b>	SEVERE	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >165	<b>16</b>	37	17
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	2	3
Lead	ppm	ASTM D5185m >150	<b>2</b>	3	2
Copper	ppm	ASTM D5185m >90	<b>14</b>	26	1
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	30	6
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m 60	<b>64</b>	73	64
Manganese	ppm	ASTM D5185m 0	<b>0</b>	2	<1
Magnesium	ppm	ASTM D5185m 1010	<b>979</b>	885	950
Calcium	ppm	ASTM D5185m 1070	<b>1099</b>	964	1098
Phosphorus	ppm	ASTM D5185m 1150	<b>1052</b>	947	1003
Zinc	ppm	ASTM D5185m 1270	<b>1320</b>	1144	1236
Sulfur	ppm	ASTM D5185m 2060	<b>3002</b>	3073	3113

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >35	<b>7</b>	17	15
Sodium	ppm	ASTM D5185m	<b>▲ 145</b>	▲ 538	16
Potassium	ppm	ASTM D5185m >20	<b>▲ 88</b>	▲ 315	1
Glycol	%	*ASTM D2982	<b>NEG</b>	▲ 0.10	NEG

## INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >7.5	<b>0.6</b>	0.3	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.0</b>	7.2	7.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.0</b>	19.5	18.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.6</b>	13.8	14.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.3</b>	11.4	6.8







# OIL ANALYSIS REPORT

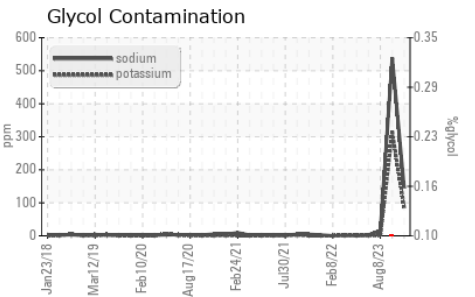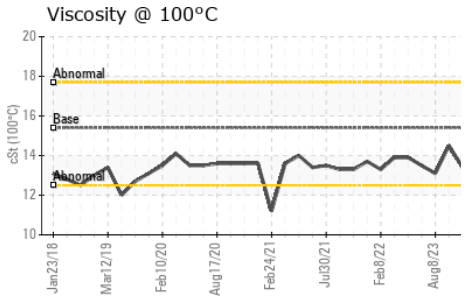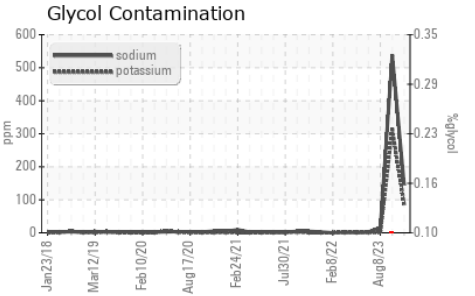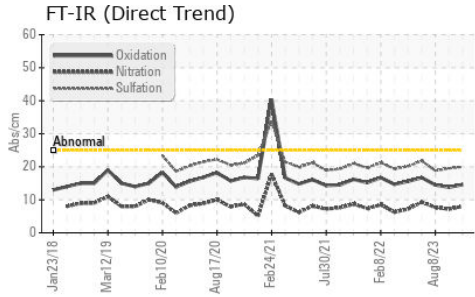

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.4	14.5

## GRAPHS

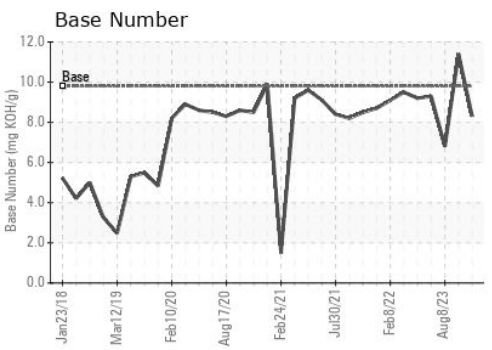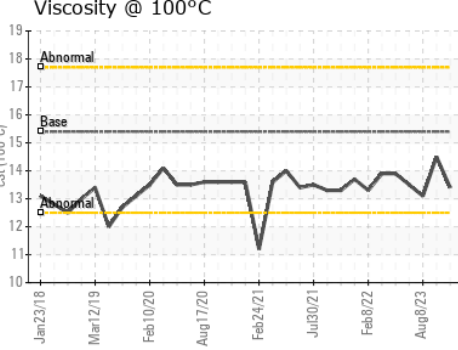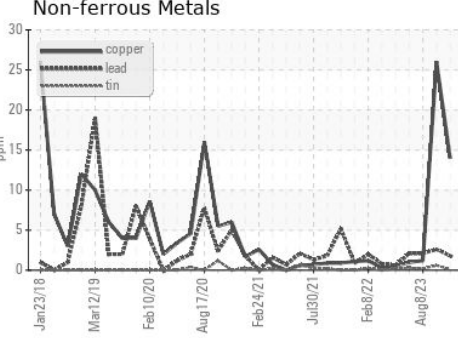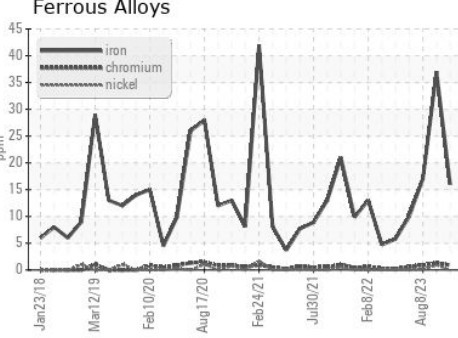

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0119666  
**Lab Number** : 06216487  
**Unique Number** : 11089351  
**Test Package** : FLEET

**GFL Environmental - 004 - Newport - Central Coast**  
 427 Roberts Road  
 Newport, NC  
 US 28570  
 Contact: Marquis Williams  
 marquis.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)