




# OIL ANALYSIS REPORT

## Sample Rating Trend

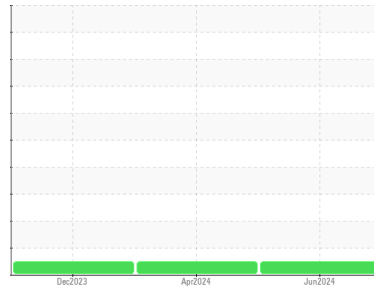

**NORMAL**



Machine Id

**928044**

Component

**Diesel Engine**

Fluid

**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0123779</b>	GFL0112994	GFL0098436
Sample Date	Client Info	<b>17 Jun 2024</b>	18 Apr 2024	29 Dec 2023
Machine Age	hrs Client Info	<b>1992</b>	1793	1233
Oil Age	hrs Client Info	<b>1992</b>	1793	1233
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>5</b>	8	7
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	1	<1
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	<1	0
Aluminum	ppm ASTM D5185m >25	<b>2</b>	2	2
Lead	ppm ASTM D5185m >45	<b>&lt;1</b>	1	<1
Copper	ppm ASTM D5185m >85	<b>&lt;1</b>	1	1
Tin	ppm ASTM D5185m >4	<b>0</b>	1	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	<1

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>2</b>	<1	2
Barium	ppm ASTM D5185m 0	<b>0</b>	<1	8
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	61	64
Manganese	ppm ASTM D5185m 0	<b>0</b>	1	<1
Magnesium	ppm ASTM D5185m 1010	<b>976</b>	947	981
Calcium	ppm ASTM D5185m 1070	<b>1079</b>	1065	1111
Phosphorus	ppm ASTM D5185m 1150	<b>1046</b>	992	962
Zinc	ppm ASTM D5185m 1270	<b>1276</b>	1219	1234
Sulfur	ppm ASTM D5185m 2060	<b>2994</b>	3343	3093

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>3</b>	6	3
Sodium	ppm ASTM D5185m	<b>1</b>	4	14
Potassium	ppm ASTM D5185m >20	<b>3</b>	3	4

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.3	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>6.3</b>	7.8	8.4
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.0</b>	18.4	18.8


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.9</b>	14.9	15.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.9</b>	7.9	7.6




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

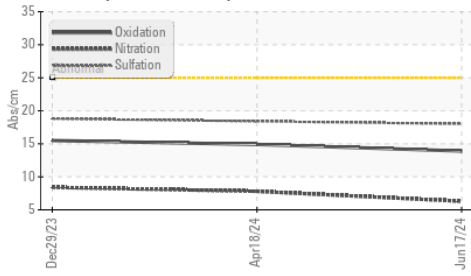

Base Number

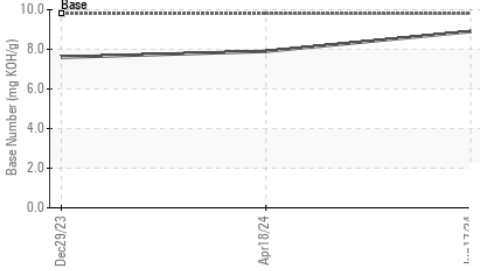

Viscosity @ 100°C

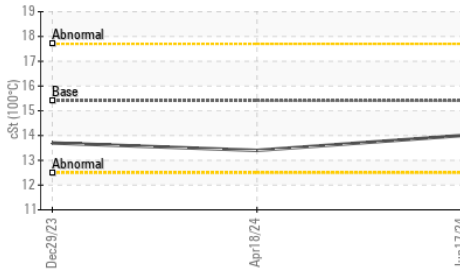


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	13.4

## GRAPHS


Ferrous Alloys

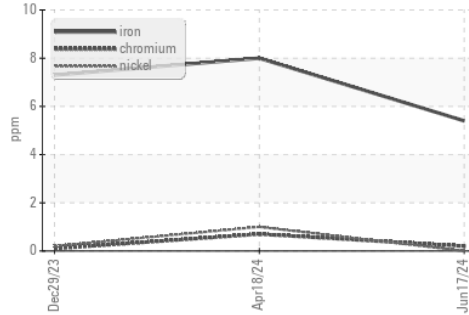


Non-ferrous Metals

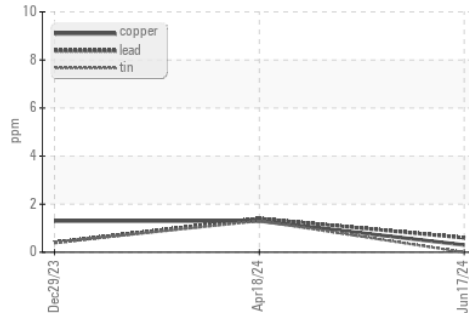

Viscosity @ 100°C

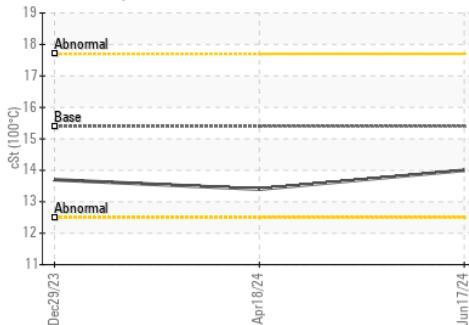

Base Number

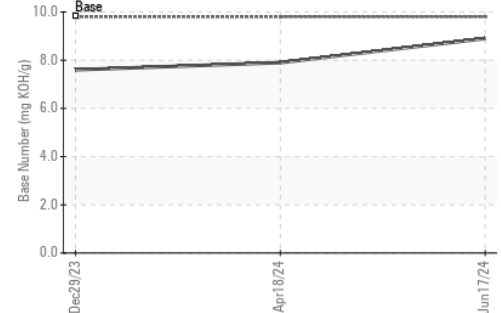

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0123779  
 Lab Number : 06216607  
 Unique Number : 11089471  
 Test Package : FLEET

Received : 21 Jun 2024  
 Tested : 24 Jun 2024  
 Diagnosed : 24 Jun 2024 - Wes Davis

GFL Environmental - 918 - Hartland HC  
 630 E Industrial Drive  
 Hartland, WI  
 US 53029

Contact: David McCall  
 david.mccall@gflenv.com  
 T: (262)369-3069

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

F: