




OIL ANALYSIS REPORT

Sample Rating Trend

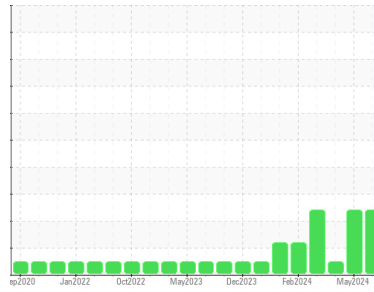

GLYCOL



Machine Id
921056-205333

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (42 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels remain high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0122581	GFL0101833	GFL0101852
Sample Date	Client Info	19 Jun 2024	21 May 2024	12 Apr 2024
Machine Age	hrs	2295	2065	1768
Oil Age	hrs	600	0	0
Oil Changed	Client Info	Changed	Not Changd	Not Changd
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	2	13	9
Chromium	ppm ASTM D5185m >20	0	<1	<1
Nickel	ppm ASTM D5185m >2	0	0	<1
Titanium	ppm ASTM D5185m >2	<1	0	<1
Silver	ppm ASTM D5185m >2	0	<1	0
Aluminum	ppm ASTM D5185m >20	1	2	2
Lead	ppm ASTM D5185m >40	0	<1	0
Copper	ppm ASTM D5185m >330	0	<1	<1
Tin	ppm ASTM D5185m >15	<1	0	<1
Vanadium	ppm ASTM D5185m	0	<1	0
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	5	1	3
Barium	ppm ASTM D5185m 0	0	0	<1
Molybdenum	ppm ASTM D5185m 60	61	74	64
Manganese	ppm ASTM D5185m 0	<1	<1	0
Magnesium	ppm ASTM D5185m 1010	943	1031	908
Calcium	ppm ASTM D5185m 1070	1094	1191	1075
Phosphorus	ppm ASTM D5185m 1150	1107	1092	1094
Zinc	ppm ASTM D5185m 1270	1296	1373	1224
Sulfur	ppm ASTM D5185m 2060	3662	3707	3343

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	3	4	4
Sodium	ppm ASTM D5185m	▲ 87	▲ 160	115
Potassium	ppm ASTM D5185m >20	▲ 45	▲ 70	47
Glycol	% *ASTM D2982	NEG	NEG	0.0

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	0.4	0.9	0.6
Nitration	Abs/cm *ASTM D7624 >20	6.3	8.2	7.1
Sulfation	Abs/.1mm *ASTM D7415 >30	18.1	20.1	19.6


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.3	14.8	14.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.9	8.4	8.7




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

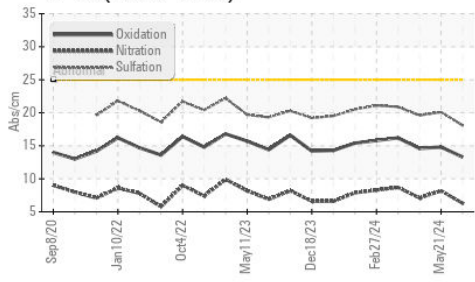


Glycol Contamination

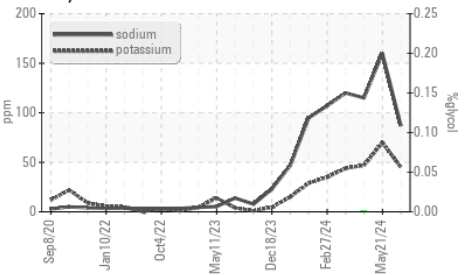

Viscosity @ 100°C

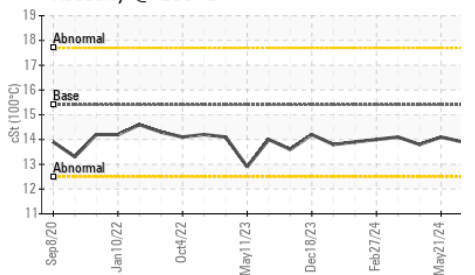

Glycol Contamination

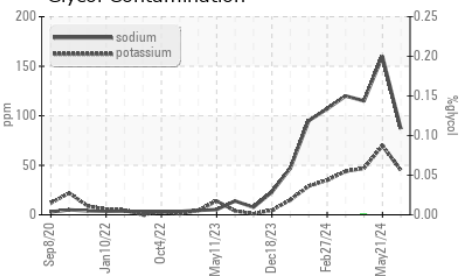


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.9	14.1

GRAPHS


Ferrous Alloys

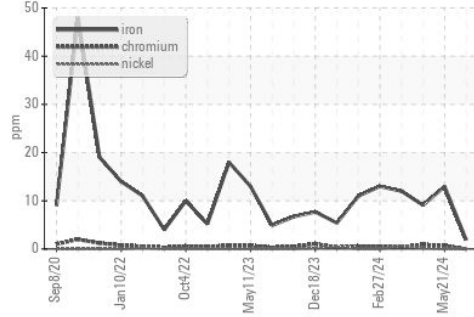


Non-ferrous Metals

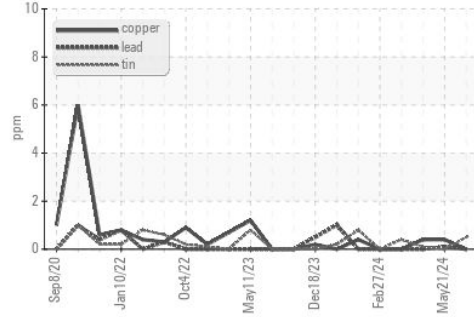

Viscosity @ 100°C

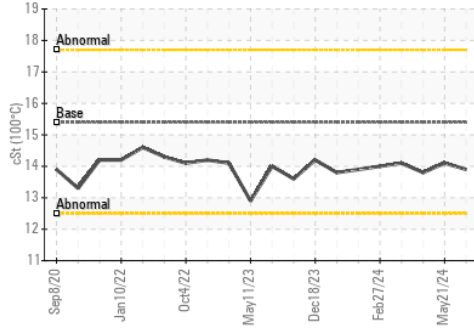

Base Number

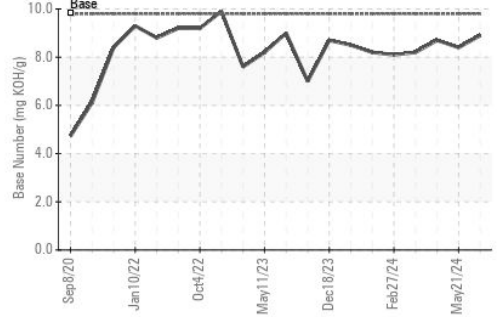

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0122581 **Received** : 21 Jun 2024
Lab Number : 06216691 **Tested** : 24 Jun 2024
Unique Number : 11089555 **Diagnosed** : 24 Jun 2024 - Sean Felton
Test Package : FLEET (Additional Tests: Glycol)

GFL Environmental - 894 - Ada Hauling
 1904 North Broadway, Suite D
 Ada, OK
 US 74820

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Johnny Spurlock
 jspurlock@gflenv.com
 T: (405)664-4476
 F: