


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

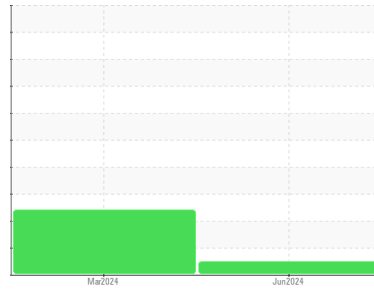

Area  
**(66439Z) Walgreens - Tractor**  
 Machine Id  
**[Walgreens - Tractor] 136A624143**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (10 GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>PCA0117306</b>	PCA0117290	---
Sample Date	Client Info			<b>14 Jun 2024</b>	14 Mar 2024	---
Machine Age	mls	Client Info		<b>97276</b>	0	---
Oil Age	mls	Client Info		<b>97276</b>	0	---
Oil Changed	Client Info			<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>80	<b>38</b>	▲ 86	---
Chromium	ppm	ASTM D5185m	>5	<b>3</b>	▲ 7	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	1	---
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>66</b>	163	---
Lead	ppm	ASTM D5185m	>30	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>150	<b>130</b>	▲ 178	---
Tin	ppm	ASTM D5185m	>5	<b>2</b>	4	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	<b>6</b>	29	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	50	<b>55</b>	46	---
Manganese	ppm	ASTM D5185m	0	<b>2</b>	5	---
Magnesium	ppm	ASTM D5185m	950	<b>909</b>	569	---
Calcium	ppm	ASTM D5185m	1050	<b>1347</b>	1868	---
Phosphorus	ppm	ASTM D5185m	995	<b>988</b>	823	---
Zinc	ppm	ASTM D5185m	1180	<b>1193</b>	980	---
Sulfur	ppm	ASTM D5185m	2600	<b>2425</b>	2050	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>7</b>	12	---
Sodium	ppm	ASTM D5185m		<b>4</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>145</b>	365	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.7	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.3</b>	11.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.1</b>	23.8	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.7</b>	27.6	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.5</b>	5.4	---





# OIL ANALYSIS REPORT

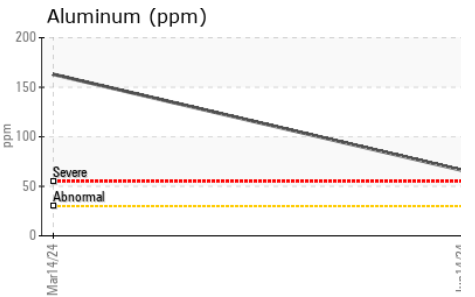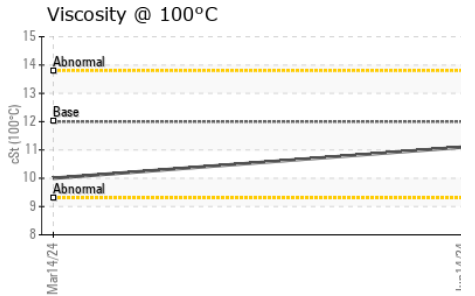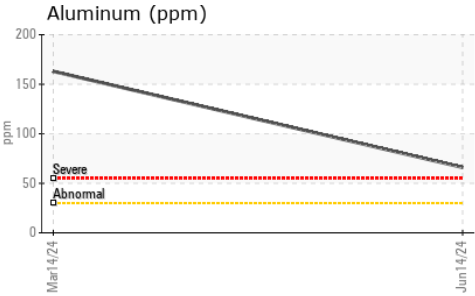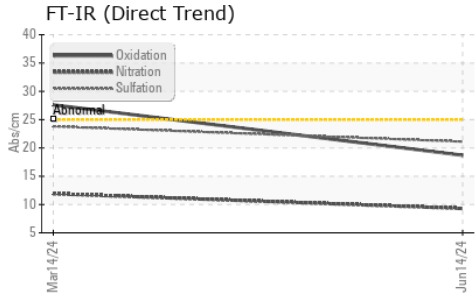

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	12.00	11.1	10.0

## GRAPHS

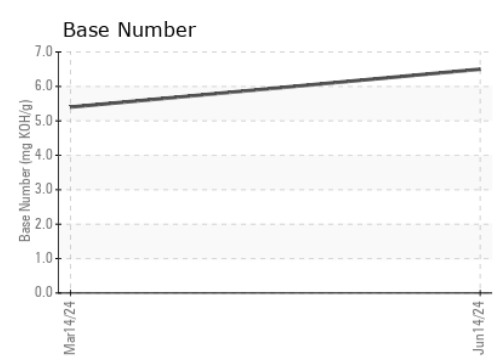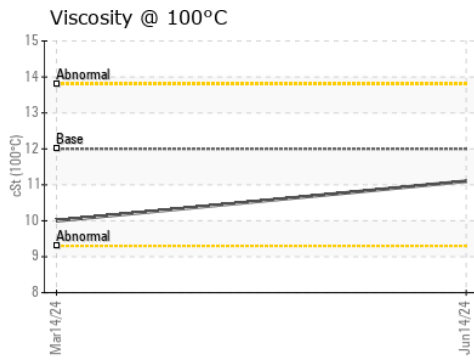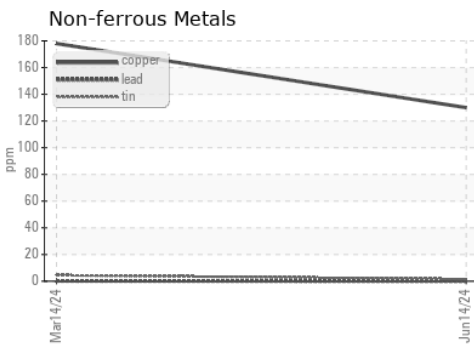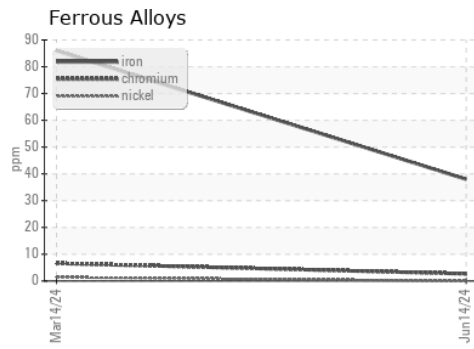

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0117306      **Received** : 21 Jun 2024  
**Lab Number** : **06216707**      **Tested** : 24 Jun 2024  
**Unique Number** : 11089571      **Diagnosed** : 24 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**Transervice - Shop 1367 - Berkeley-Jupiter**  
 15998 Walgreens Drive  
 Jupiter, FL  
 US 33478

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Manny Gonzalez  
 egonzalez@transervice.com  
 T: (561)776-0755  
 F: (561)776-0799