


# **OIL ANALYSIS REPORT**

# **Walgreens - Tractor** [Walgreens - Tractor] 136A624068

**Diesel Engine** 

PETRO CANADA DURON SHP 10W30 (1 Q





## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor. ( Customer Sample Comment: Top Up Amount: 1 QT

#### Wear

Metal levels are typical for a new component breaking in.

#### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.


# **Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

TS)				Jun 2024		
SAMPLE INFOR	RMATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0117303		
Sample Date		Client Info		07 Jun 2024		
Machine Age	mls	Client Info		20692		
Oil Age	mls	Client Info		20692		
Oil Changed		Client Info		Oil Added		
Sample Status				NORMAL		
CONTAMINAT	ΓΙΟΝ	method	limit/base	current	history1	history2
Fuel		WC Method	>2.0	<1.0		
Water		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	_S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	33		
Chromium	ppm	ASTM D5185m	>20	1		
Nickel	ppm	ASTM D5185m	>4	5		
Titanium	ppm	ASTM D5185m		<1		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	36		
Lead	ppm	ASTM D5185m	>40	2		
Copper	ppm	ASTM D5185m	>330	36		
Tin	ppm	ASTM D5185m	>15	3		
Vanadium	ppm	ASTM D5185m		0		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	70		
Barium	ppm	ASTM D5185m	0	2		
Molybdenum	ppm	ASTM D5185m	50	15		
Manganese	ppm	ASTM D5185m	0	4		
Magnesium	ppm	ASTM D5185m	950	218		
Calcium	ppm	ASTM D5185m	1050	2006		
Phosphorus	ppm	ASTM D5185m	995	892		
Zinc	ppm	ASTM D5185m	1180	1230		
Sulfur	ppm	ASTM D5185m	2600	3476		
CONTAMINAN	NTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	37		
Sodium	ppm	ASTM D5185m		5		
Potassium	ppm	ASTM D5185m	>20	86		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.2		
Nitration	Abs/cm	*ASTM D7624	>20	8.5		
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.2		
FLUID DEGRA	DATION	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.8		
Base Number (BN)	mg KOH/g	ASTM D2896		5.4		
, ,	0					



# **OIL ANALYSIS REPORT**

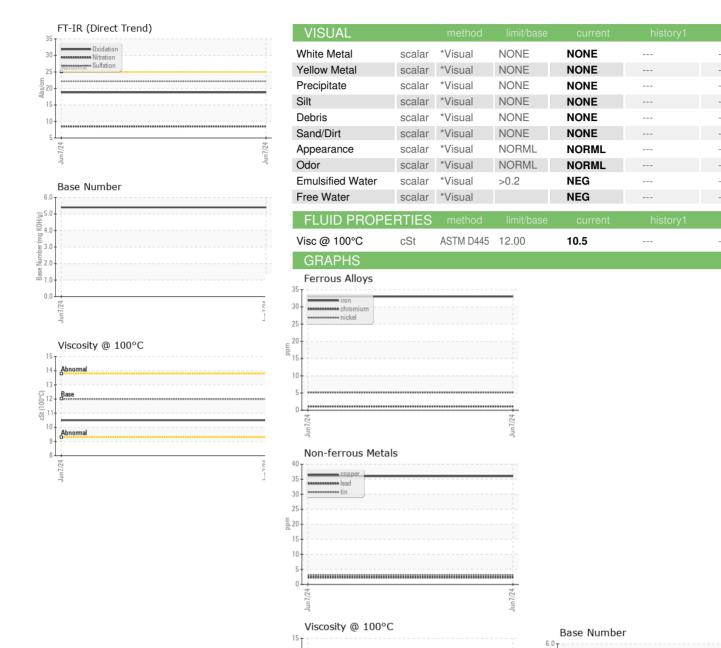





Certificate 12367

Laboratory Sample No.

: PCA0117303 Lab Number : 06216725 Unique Number : 11089589 Test Package : FLEET

To discuss this sample report, contact Customer Service at 1-800-237-1369.

cSt (10

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received : 21 Jun 2024

Tested : 24 Jun 2024 Diagnosed

: 03 Jul 2024 - Doug Bogart

B/H0X 4.0

0.0

Transervice - Shop 1367 - Berkeley-Jupiter 15998 Walgreens Drive

> Jupiter, FL US 33478

> > F: (561)776-0799

Contact: Manny Gonzalez egonzalez@transervice.com T: (561)776-0755

 $^st$  - Denotes test methods that are outside of the ISO 17025 scope of accreditation. Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)