




# OIL ANALYSIS REPORT

Sample Rating Trend

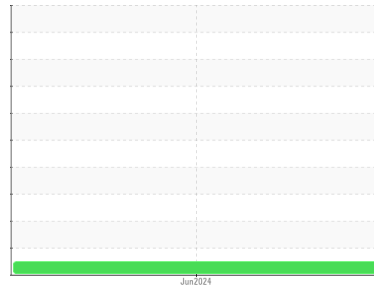

**NORMAL**



Machine Id

**733030**

Component

**1 Differential**

Fluid

**PETRO CANADA TRAXON SYNTHETIC 75W90 (--- GAL)**

## DIAGNOSIS

### Recommendation

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0125256</b>	---	---
Sample Date	Client Info	<b>13 Jun 2024</b>	---	---
Machine Age	hrs Client Info	<b>2369</b>	---	---
Oil Age	hrs Client Info	<b>2369</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >.2	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >500	<b>149</b>	---	---
Chromium	ppm ASTM D5185m >10	<b>&lt;1</b>	---	---
Nickel	ppm ASTM D5185m >10	<b>0</b>	---	---
Titanium	ppm ASTM D5185m	<b>0</b>	---	---
Silver	ppm ASTM D5185m	<b>0</b>	---	---
Aluminum	ppm ASTM D5185m >25	<b>0</b>	---	---
Lead	ppm ASTM D5185m >25	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185m >100	<b>153</b>	---	---
Tin	ppm ASTM D5185m >10	<b>&lt;1</b>	---	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm ASTM D5185m	<b>0</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 328	<b>46</b>	---	---
Barium	ppm ASTM D5185m 1	<b>4</b>	---	---
Molybdenum	ppm ASTM D5185m	<b>0</b>	---	---
Manganese	ppm ASTM D5185m	<b>13</b>	---	---
Magnesium	ppm ASTM D5185m 1	<b>157</b>	---	---
Calcium	ppm ASTM D5185m 7	<b>9</b>	---	---
Phosphorus	ppm ASTM D5185m 1145	<b>1547</b>	---	---
Zinc	ppm ASTM D5185m 3	<b>14</b>	---	---
Sulfur	ppm ASTM D5185m 17909	<b>26104</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >75	<b>47</b>	---	---
Sodium	ppm ASTM D5185m	<b>6</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>3</b>	---	---

## VISUAL




method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	<b>NONE</b>	---	---
Yellow Metal	scalar *Visual NONE	<b>NONE</b>	---	---
Precipitate	scalar *Visual NONE	<b>NONE</b>	---	---
Silt	scalar *Visual NONE	<b>NONE</b>	---	---
Debris	scalar *Visual NONE	<b>LIGHT</b>	---	---
Sand/Dirt	scalar *Visual NONE	<b>NONE</b>	---	---
Appearance	scalar *Visual NORML	<b>NORML</b>	---	---
Odor	scalar *Visual NORML	<b>NORML</b>	---	---
Emulsified Water	scalar *Visual >.2	<b>NEG</b>	---	---
Free Water	scalar *Visual	<b>NEG</b>	---	---



# OIL ANALYSIS REPORT

SAMPLE IMAGES				method	limit/base	current	history1	history2
Color						no image	no image	no image
Bottom						no image	no image	no image

## GRAPHS

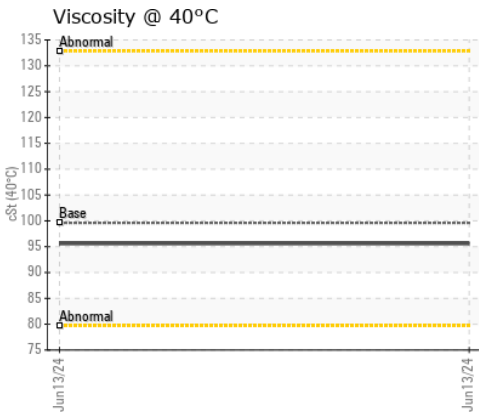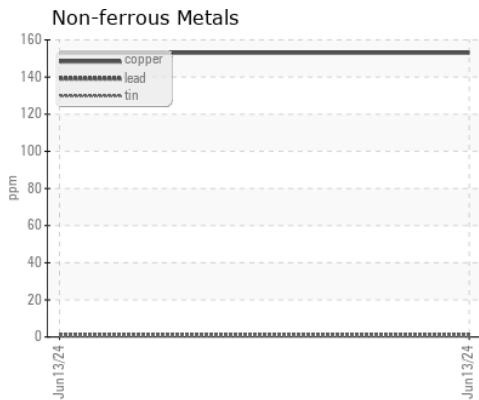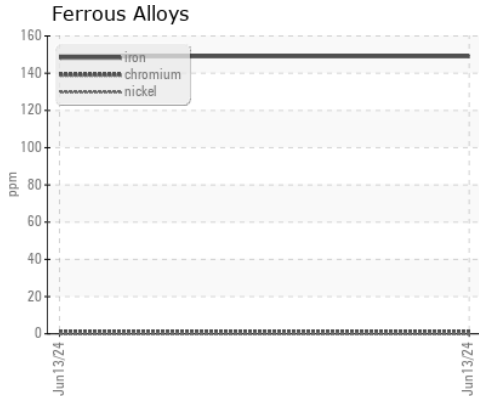

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0125256  
**Lab Number** : 06217459  
**Unique Number** : 11090323  
**Test Package** : FLEET

**Received** : 21 Jun 2024  
**Tested** : 24 Jun 2024  
**Diagnosed** : 24 Jun 2024 - Don Baldrige

**GFL Environmental - 865 - East Mount Hauling**  
 7213 East Mount Houston Road  
 Houston, TX 77050  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: