




# OIL ANALYSIS REPORT



Area  
 (BD70517) {UNASSIGNED}  
 Machine Id  
**814037 MACK LR64R**  
 Component  
**Diesel Engine**  
 Fluid  
**TIER ONE 15W40 (--- GAL)**

Sample Rating Trend

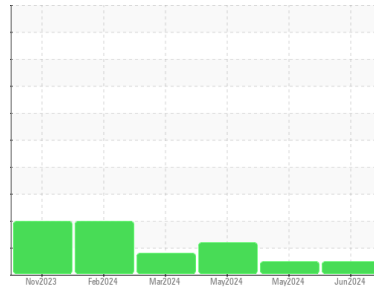

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0115277</b>	GFL0115303	GFL0115296
Sample Date	Client Info		<b>17 Jun 2024</b>	20 May 2024	01 May 2024
Machine Age	hrs	Client Info	<b>1675</b>	1473	1342
Oil Age	hrs	Client Info	<b>4</b>	14	27
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	ATTENTION

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>120	<b>15</b>	10	32
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	3
Nickel	ppm	ASTM D5185m	>5	<b>3</b>	2	<1
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	2	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	1	4
Copper	ppm	ASTM D5185m	>330	<b>46</b>	56	30
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	2
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	2

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		<b>12</b>	6	2
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>60</b>	55	60
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	1
Magnesium	ppm	ASTM D5185m		<b>929</b>	821	923
Calcium	ppm	ASTM D5185m		<b>1151</b>	1063	1313
Phosphorus	ppm	ASTM D5185m		<b>1050</b>	1026	1120
Zinc	ppm	ASTM D5185m		<b>1291</b>	1182	1349
Sulfur	ppm	ASTM D5185m		<b>3083</b>	3003	3831

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>6</b>	6	7
Sodium	ppm	ASTM D5185m		<b>2</b>	<1	136
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	2	9

## INFRA-RED




	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>4	<b>0.6</b>	0.6	1.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.9</b>	9.2	8.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.6</b>	21.3	21.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.2</b>	16.8	14.7
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.1</b>	7.2	7.8







# OIL ANALYSIS REPORT

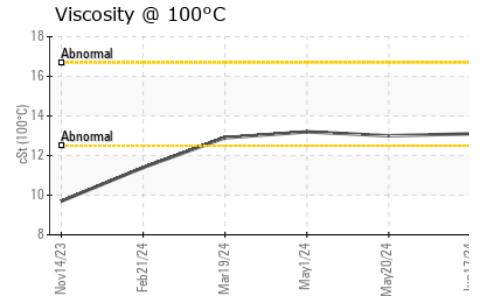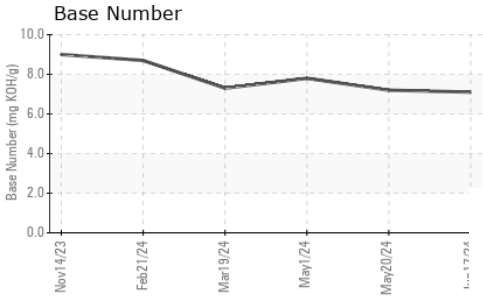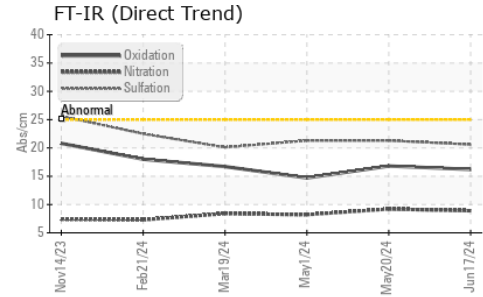

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.1	13.0	13.2

## GRAPHS

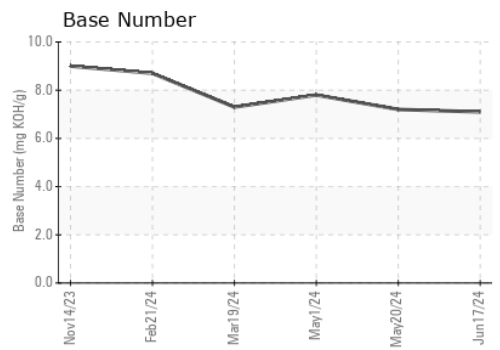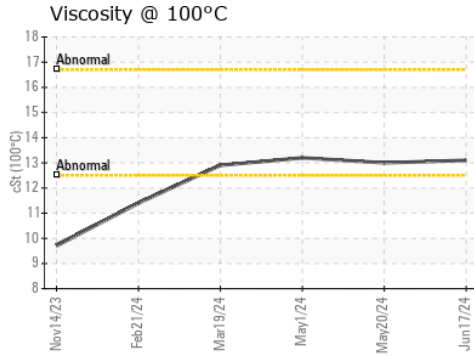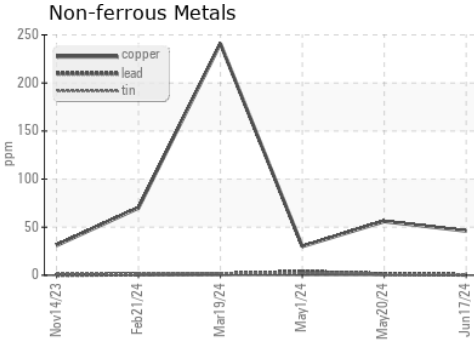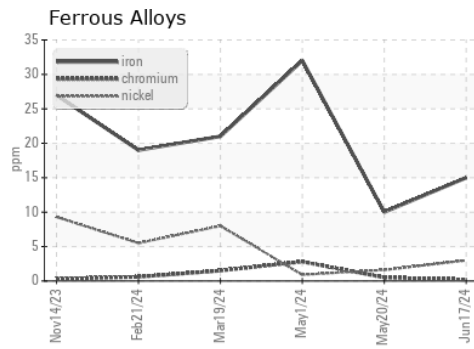

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115277      **Received** : 21 Jun 2024  
**Lab Number** : 06217563      **Tested** : 24 Jun 2024  
**Unique Number** : 11090427      **Diagnosed** : 24 Jun 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 642- Grand Rapids Hauling**  
 5826 Alden Nash Ave SE  
 Lowell, MI  
 US 49331

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)