




# OIL ANALYSIS REPORT

Sample Rating Trend

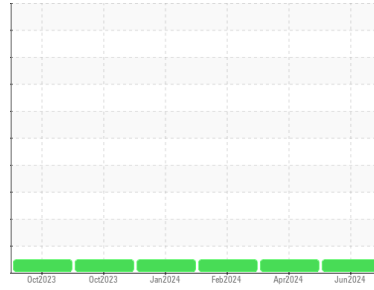

**NORMAL**



Area  
**(THG7558)**

Machine Id  
**733030**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0125248</b>	GFL0117738	GFL0114492
Sample Date	Client Info	<b>13 Jun 2024</b>	23 Apr 2024	24 Feb 2024
Machine Age	hrs Client Info	<b>2369</b>	22928	1546
Oil Age	hrs Client Info	<b>0</b>	0	1546
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >50	<b>9</b>	8	10
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	0
Nickel	ppm ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm ASTM D5185m	<b>0</b>	<1	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >9	<b>3</b>	2	1
Lead	ppm ASTM D5185m >30	<b>&lt;1</b>	<1	0
Copper	ppm ASTM D5185m >35	<b>2</b>	1	1
Tin	ppm ASTM D5185m >4	<b>1</b>	<1	0
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 50	<b>9</b>	26	11
Barium	ppm ASTM D5185m 5	<b>0</b>	1	0
Molybdenum	ppm ASTM D5185m 50	<b>55</b>	50	54
Manganese	ppm ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm ASTM D5185m 560	<b>609</b>	537	675
Calcium	ppm ASTM D5185m 1510	<b>1736</b>	1514	1879
Phosphorus	ppm ASTM D5185m 780	<b>810</b>	733	929
Zinc	ppm ASTM D5185m 870	<b>1054</b>	902	1180
Sulfur	ppm ASTM D5185m 2040	<b>3106</b>	2497	3079

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >+100	<b>5</b>	5	4
Sodium	ppm ASTM D5185m	<b>8</b>	7	5
Potassium	ppm ASTM D5185m >20	<b>6</b>	3	2

## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844	<b>0</b>	0.1	0
Nitration	Abs/cm *ASTM D7624 >20	<b>11.1</b>	8.9	10.2
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>22.6</b>	19.6	20.3


## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.4</b>	16.6	17.5
Base Number (BN)	mg KOH/g ASTM D2896 10.2	<b>5.0</b>	6.9	5.8




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

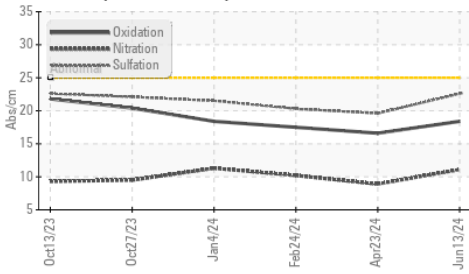

Base Number

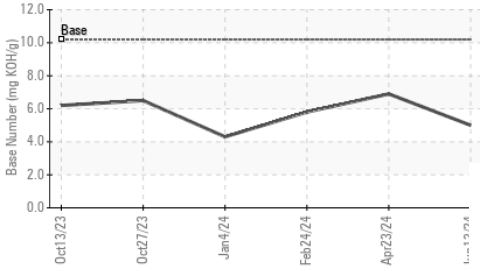

Viscosity @ 100°C

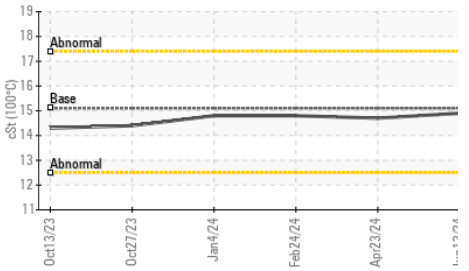


PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


PARAMETER	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.9	14.7

## GRAPHS


Ferrous Alloys

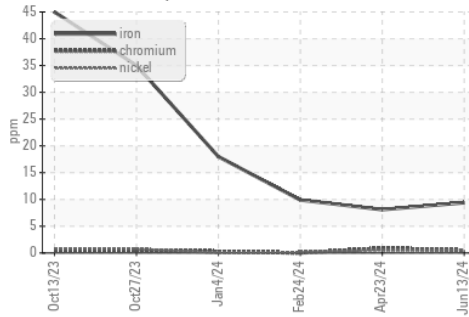


Non-ferrous Metals

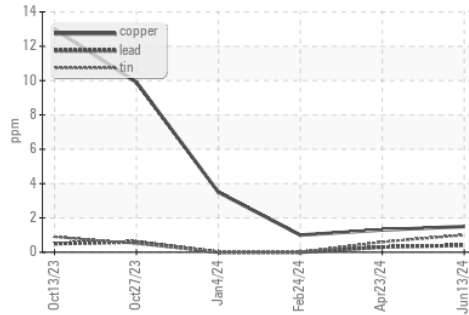

Viscosity @ 100°C

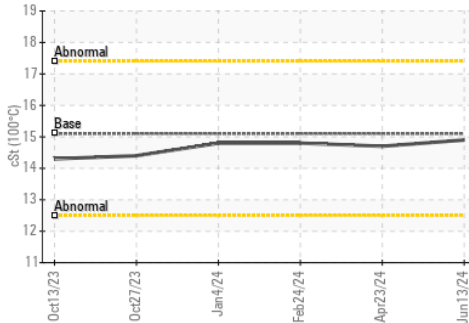

Base Number

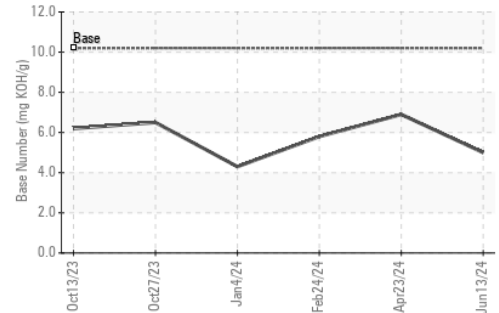

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0125248  
 Lab Number : 06217575  
 Unique Number : 11090439  
 Test Package : FLEET

Received : 21 Jun 2024  
 Tested : 24 Jun 2024  
 Diagnosed : 24 Jun 2024 - Wes Davis

GFL Environmental - 865 - East Mount Hauling  
 7213 East Mount Houston Road  
 Houston, TX  
 US 77050  
 Contact: TECHNICIAN ACCOUNT  
 wcgfldemo@gmail.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: