




# OIL ANALYSIS REPORT



Area  
**(63A3YA5)**  
 Machine Id  
**411001-411001**  
 Component  
**Diesel Engine**  
 Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- LTR)**

### Sample Rating Trend

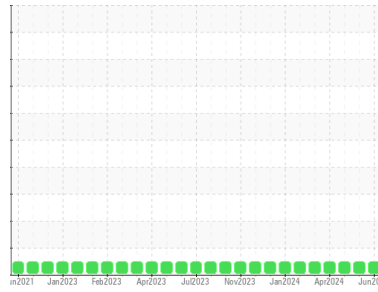

**NORMAL**



## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0115768</b>	GFL0115788	GFL0115786
Sample Date	Client Info		<b>18 Jun 2024</b>	31 May 2024	13 May 2024
Machine Age	hrs	Client Info	<b>8954</b>	8816	8684
Oil Age	hrs	Client Info	<b>270</b>	132	884
Oil Changed	Client Info		<b>N/A</b>	Not Changd	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>4</b>	4	9
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	3
Nickel	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	3
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	2
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	3
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	5
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	3
Copper	ppm	ASTM D5185m >330	<b>1</b>	10	21
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	3
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	2
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	2

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 151	<b>15</b>	21	13
Barium	ppm	ASTM D5185m 0.4	<b>1</b>	0	1
Molybdenum	ppm	ASTM D5185m 250	<b>74</b>	75	74
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	3
Magnesium	ppm	ASTM D5185m 0	<b>847</b>	860	826
Calcium	ppm	ASTM D5185m 2046	<b>1103</b>	1119	1093
Phosphorus	ppm	ASTM D5185m 1043	<b>940</b>	842	905
Zinc	ppm	ASTM D5185m 943	<b>1118</b>	1096	1081
Sulfur	ppm	ASTM D5185m 5012	<b>2894</b>	2801	2994

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	4	8
Sodium	ppm	ASTM D5185m	<b>1</b>	2	4
Potassium	ppm	ASTM D5185m >20	<b>3</b>	2	6

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.2</b>	0.1	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.4</b>	5.5	7.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.3</b>	17.2	18.2


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.4</b>	12.9	13.9
Base Number (BN)	mg KOH/g	ASTM D2896 12.5	<b>7.8</b>	8.3	7.3




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

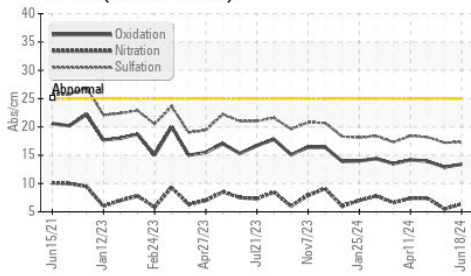

Base Number

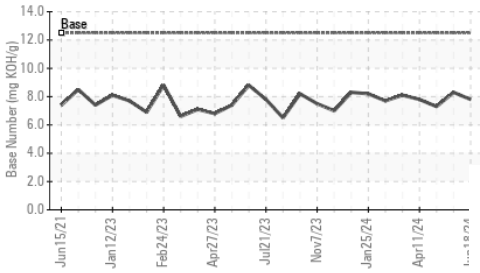

Viscosity @ 100°C

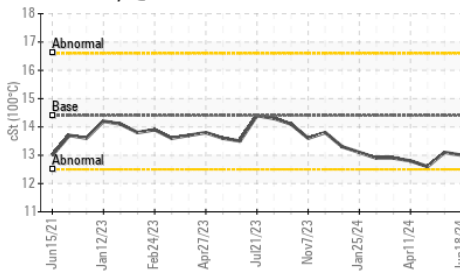


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.0	13.1

## GRAPHS


Ferrous Alloys

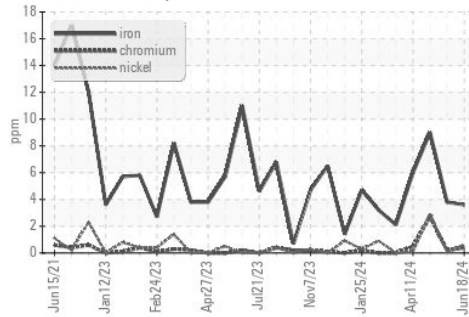


Non-ferrous Metals

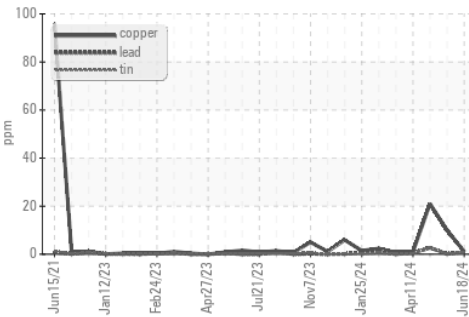

Viscosity @ 100°C

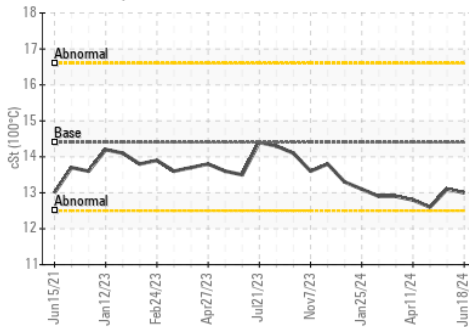

Base Number

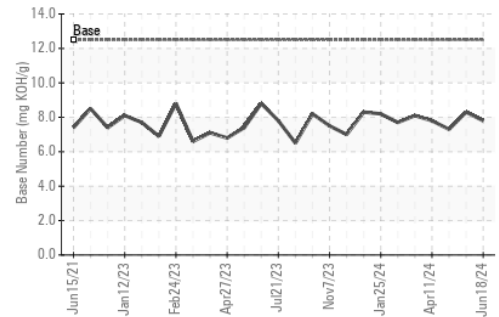

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0115768  
 Lab Number : 06217813  
 Unique Number : 11096010  
 Test Package : FLEET

GFL Environmental - 180 - Tuscaloosa Hauling  
 4701 12TH ST NE  
 Tuscaloosa, AL  
 US 35404

Contact: FREDERICK ROGERS  
 fred.rogers@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: