




# OIL ANALYSIS REPORT

## Sample Rating Trend

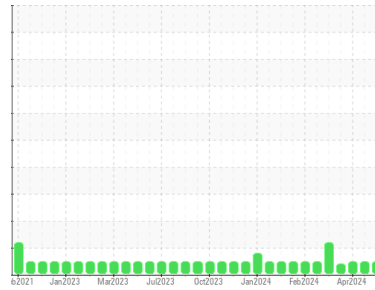

**NORMAL**



Area  
**(61AC7A0)**  
Machine Id  
**2414**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0115805</b>	GFL0121436	GFL0115854
Sample Date	Client Info		<b>18 Jun 2024</b>	07 Jun 2024	26 Apr 2024
Machine Age	hrs	Client Info	<b>21515</b>	21423	21177
Oil Age	hrs	Client Info	<b>2035</b>	1943	1697
Oil Changed	Client Info		<b>N/A</b>	N/A	N/A
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	4.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>4</b>	12	1
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	6	3
Lead	ppm	ASTM D5185m >40	<b>1</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>1</b>	2	0
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	4	6
Barium	ppm	ASTM D5185m 0	<b>1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	60	60
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>845</b>	828	842
Calcium	ppm	ASTM D5185m 1070	<b>1037</b>	1013	1028
Phosphorus	ppm	ASTM D5185m 1150	<b>975</b>	981	970
Zinc	ppm	ASTM D5185m 1270	<b>1143</b>	1136	1123
Sulfur	ppm	ASTM D5185m 2060	<b>2959</b>	3247	3227

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	3
Sodium	ppm	ASTM D5185m	<b>0</b>	4	<1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	<1

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.3</b>	0.7	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.6</b>	7.8	5.8
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.4</b>	18.4	17.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.9</b>	13.8	13.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.4</b>	8.1	8.5







# OIL ANALYSIS REPORT

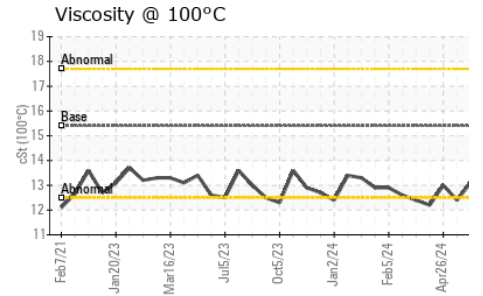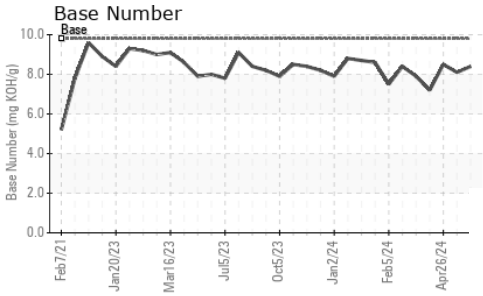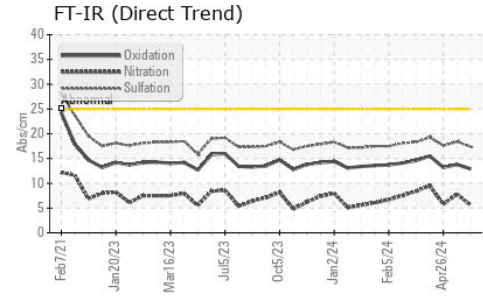

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.1</b>	12.4	13.0

## GRAPHS

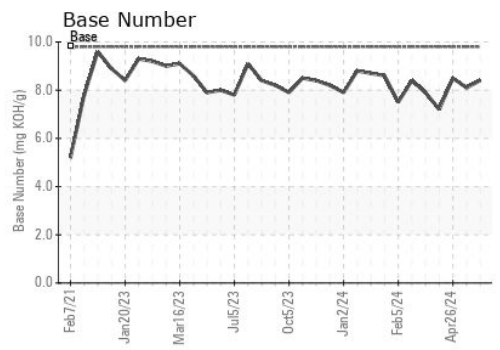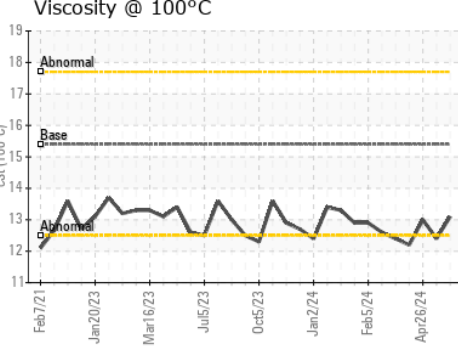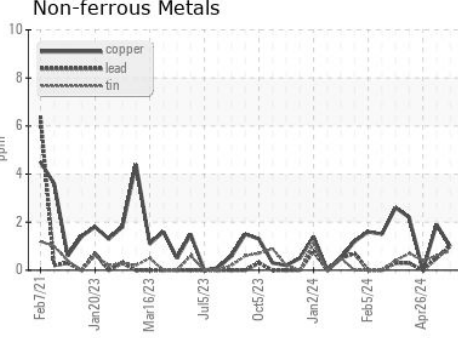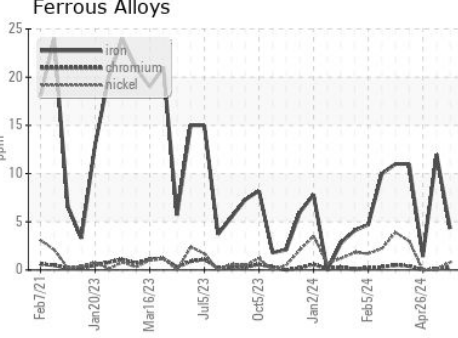

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115805      **Received** : 24 Jun 2024  
**Lab Number** : 06217826      **Tested** : 25 Jun 2024  
**Unique Number** : 11096023      **Diagnosed** : 25 Jun 2024 - Wes Davis  
**Test Package** : FLEET

GFL Environmental - 868 - Childersburg Fines Hauling (Alpine)  
 13737 Plant Rd  
 Childersburg, AL  
 US 35044  
 Contact: JONATHAN WILLIAMS  
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)