




OIL ANALYSIS REPORT

Sample Rating Trend

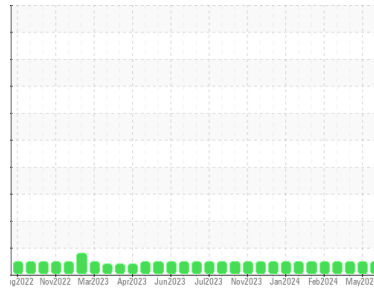

NORMAL



Machine Id

910093

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0115767	GFL0115790	GFL0115784	
Sample Date	Client Info	14 Jun 2024	31 May 2024	13 May 2024	
Machine Age	hrs	Client Info	8651	8554	8431
Oil Age	hrs	Client Info	220	123	1436
Oil Changed	Client Info	N/A	Not Changd	Changed	
Sample Status		NORMAL	NORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	9	10	27
Chromium	ppm ASTM D5185m >20	2	<1	6
Nickel	ppm ASTM D5185m >4	<1	<1	3
Titanium	ppm ASTM D5185m	<1	<1	2
Silver	ppm ASTM D5185m >3	<1	0	3
Aluminum	ppm ASTM D5185m >20	3	4	8
Lead	ppm ASTM D5185m >40	<1	0	2
Copper	ppm ASTM D5185m >330	<1	3	3
Tin	ppm ASTM D5185m >15	<1	<1	3
Vanadium	ppm ASTM D5185m	<1	0	2
Cadmium	ppm ASTM D5185m	<1	0	2

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	21	16	37
Barium	ppm ASTM D5185m 0	1	0	1
Molybdenum	ppm ASTM D5185m 60	72	76	99
Manganese	ppm ASTM D5185m 0	<1	<1	3
Magnesium	ppm ASTM D5185m 1010	820	855	1077
Calcium	ppm ASTM D5185m 1070	1081	1112	1384
Phosphorus	ppm ASTM D5185m 1150	914	817	1164
Zinc	ppm ASTM D5185m 1270	1094	1097	1406
Sulfur	ppm ASTM D5185m 2060	2821	2729	3722

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	5	6	10
Sodium	ppm ASTM D5185m	2	4	8
Potassium	ppm ASTM D5185m >20	3	2	7

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.4	0.4	0.8
Nitration	Abs/cm *ASTM D7624 >20	6.2	6.7	8.0
Sulfation	Abs/.1mm *ASTM D7415 >30	18.1	17.7	20.2


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	13.5	13.1	15.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	7.8	8.2	7.5




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

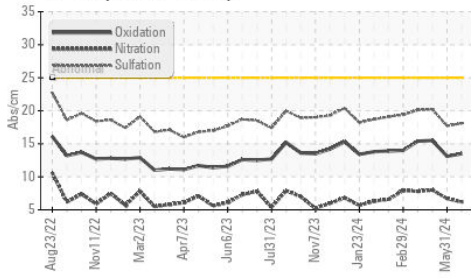

Base Number

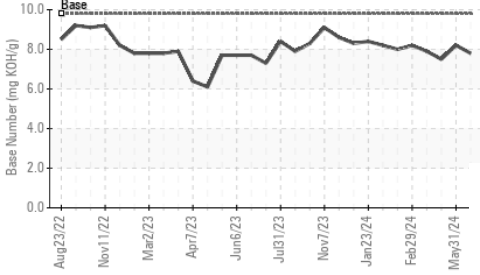

Viscosity @ 100°C

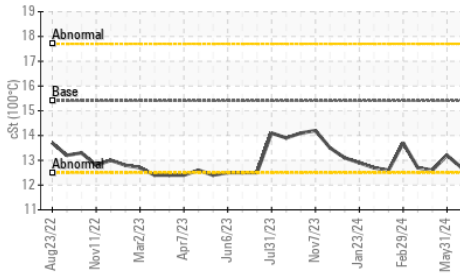


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.7	13.2

GRAPHS


Ferrous Alloys

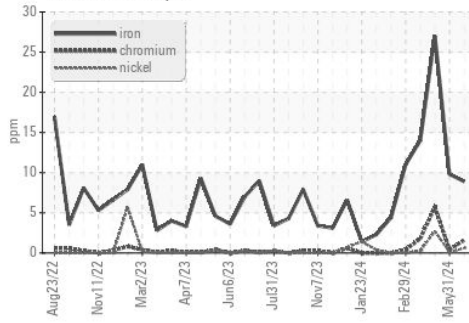


Non-ferrous Metals

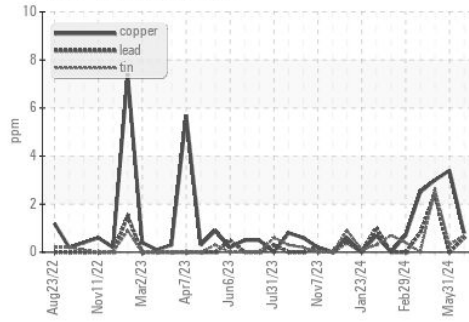

Viscosity @ 100°C

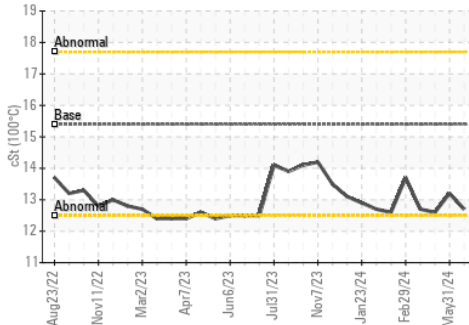

Base Number

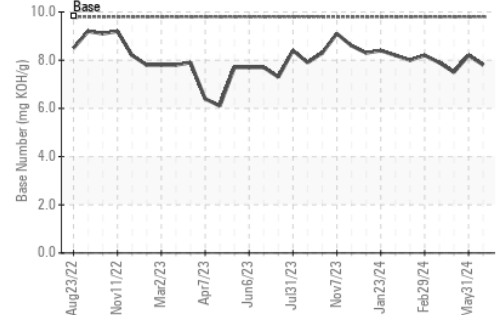

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0115767
 Lab Number : 06217827
 Unique Number : 11096024
 Test Package : FLEET

GFL Environmental - 180 - Tuscaloosa Hauling
 4701 12TH ST NE
 Tuscaloosa, AL
 US 35404

Contact: FREDERICK ROGERS
 fred.rogers@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: