



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Area  
{UNASSIGNED}

Machine Id  
**10458**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA 15W40 (7 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. ( Customer Sample Comment: It's a new unit to us currently. Cannot read the hours. I will update you when possible. Current mileage of 77592 which I don't believe is correct will update that in due time. )

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0124432</b>	---	---
Sample Date	Client Info	<b>18 Jun 2024</b>	---	---
Machine Age	hrs Client Info	<b>0</b>	---	---
Oil Age	hrs Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>Changed</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	---	---
Water	WC Method >0.2	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >75	<b>12</b>	---	---
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	---	---
Nickel	ppm ASTM D5185m >4	<b>&lt;1</b>	---	---
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	---	---
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	---	---
Aluminum	ppm ASTM D5185m >15	<b>3</b>	---	---
Lead	ppm ASTM D5185m >25	<b>&lt;1</b>	---	---
Copper	ppm ASTM D5185m >100	<b>4</b>	---	---
Tin	ppm ASTM D5185m >4	<b>&lt;1</b>	---	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>1</b>	---	---
Barium	ppm ASTM D5185m	<b>1</b>	---	---
Molybdenum	ppm ASTM D5185m	<b>61</b>	---	---
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Magnesium	ppm ASTM D5185m	<b>959</b>	---	---
Calcium	ppm ASTM D5185m	<b>1077</b>	---	---
Phosphorus	ppm ASTM D5185m	<b>1048</b>	---	---
Zinc	ppm ASTM D5185m	<b>1231</b>	---	---
Sulfur	ppm ASTM D5185m	<b>3179</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	---	---
Sodium	ppm ASTM D5185m	<b>2</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>16</b>	---	---
Glycol	% *ASTM D2982	<b>NEG</b>	---	---

## INFRA-RED





method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.1</b>	---	---
Nitration	Abs/cm *ASTM D7624 >20	<b>4.8</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>16.9</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.0</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896	<b>9.3</b>	---	---







# OIL ANALYSIS REPORT

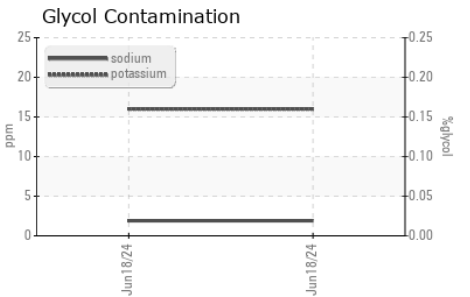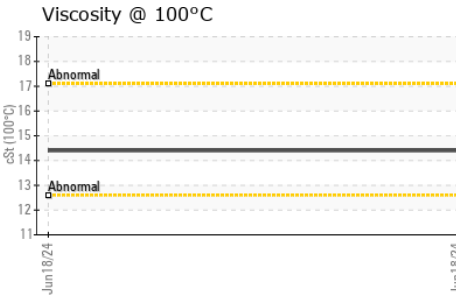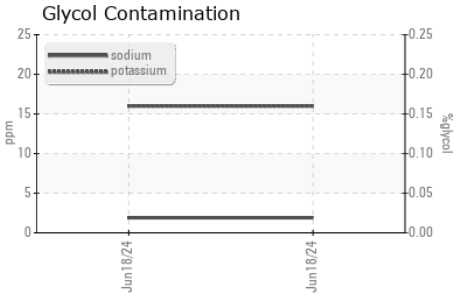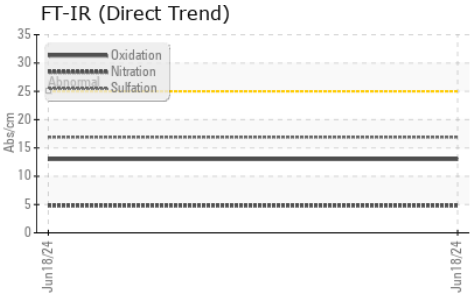

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	---	---

## GRAPHS

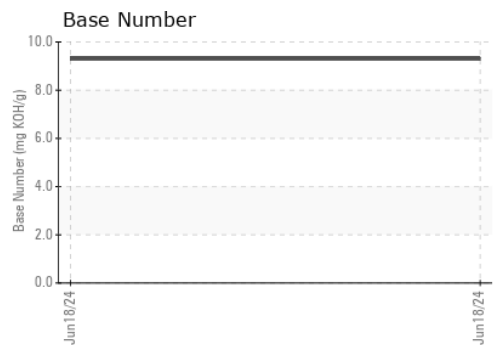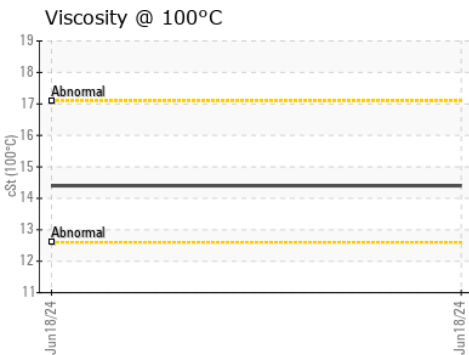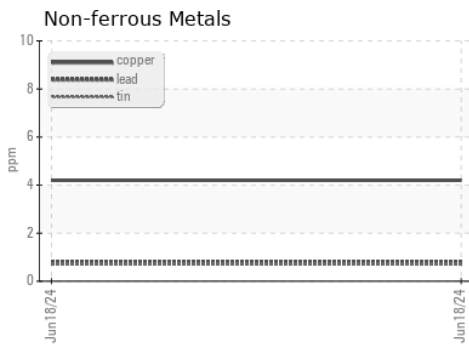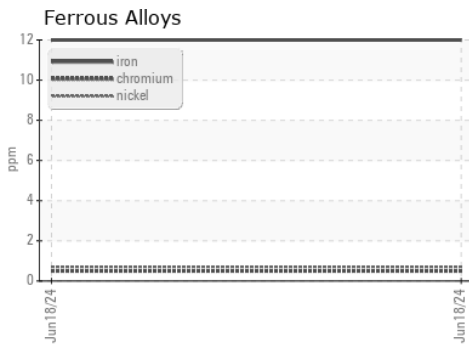

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0124432      **Received** : 24 Jun 2024  
**Lab Number** : 06217866      **Tested** : 25 Jun 2024  
**Unique Number** : 11096063      **Diagnosed** : 25 Jun 2024 - Don Baldrige  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 031 - Greenville/Spartanburg**  
 1635 Antioch Church Rd  
 Piedmont, SC  
 US 29673  
 Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)